

LEASE NO. GS-08P-LUT00091

BUILDING NO. UT1537

Global Lease
GSA TEMPLATE L100 (10/2021)

A. This Lease is made and entered into between

SGU Property Services, LLC

(Lessor), whose principal place of business is 37 West 1070 South, St. George, UT 84770 and whose interest in the Property described herein is that of Fee Owner, and

The United States of America

(Government), acting by and through the designated representative of the General Services Administration (GSA), upon the terms and conditions set forth herein.

B. Witnesseth: The parties hereto, for the consideration hereinafter mentioned, covenant and agree as follows:

Lessor hereby leases to the Government the Premises described herein, being all or a portion of the Property located at

A parcel of land as follows: Legal S: 23 T: 43S R: 15W BEG S0°02'36 E 2256.80 FT ALG SEC/L & N90° W 1262.59 FT FM NE COR SEC 23 T43S R15W; TH N50°0'25 W 31.45 FT; TH S23°50' W 594.50 FT; TH S50°25' E 1526.35 FT; TH N23°29'08 E 593.07 FT TO POB

and more fully described in Section 1 and Exhibit A-1, together with rights to the use of parking and other areas as set forth herein, to be used for such purposes as determined by GSA.

C. LEASE TERM

To Have and To Hold the said Premises with its appurtenances for the term beginning upon acceptance of the Premises as required by this Lease and continuing for a period of **20 Years, 18 Years Firm**, subject to termination and renewal rights as may be hereinafter set forth. The commencement date of this Lease, along with any applicable termination and renewal rights, shall be more specifically set forth in a Lease Amendment upon substantial completion and acceptance of the Space by the Government.

In Witness Whereof, the parties to this Lease evidence their agreement to all terms and conditions set forth herein by their signatures below, to be effective as of the date of delivery of the fully executed Lease to the Lessor.

DocuSigned by:
FOR THE LESSOR:

(b) (6)

Name: Ben Shakespeare

Title: Member

Entity: SGU Property Services, LLC

DocuSigned by: 11/18/2022

(b) (6)

Name: David Pace Gertsch

Title: Member, SGU Property Services, LLC

Date: 11/18/2022

Name: _____

DocuSigned by:
THE LESSOR BY:

(b) (6)

Name: Joshua Kyle Hurst

Title: Member

Date: 11/18/2022

Name: _____

DocuSigned by:
FOR THE GOVERNMENT:

(b) (6)

Name: Mark Pearce

Title: Lease Contracting Officer

General Services Administration, Public Building Services

Date: 11/18/2022

Name: _____

The information collection requirements contained in this Solicitation/Contract, that are not required by the regulation, have been approved by the Office of Management and Budget pursuant to the Paperwork Reduction Act and assigned the OMB Control Number 05-0090-0163.

SECTION 1 THE PREMISES, RENT, AND OTHER TERMS 7

1.01	THE PREMISES (OCT 2016)	7
1.02	EXPRESS APPURTENANT RIGHTS (SEP 2013)	7
1.03	TRUCK TURNING RADIUS REQUIREMENT (MAY 2014)	7
1.04	CLEAR CEILING HEIGHT REQUIREMENTS (MAY 2014)	7
1.05	WAREHOUSE BAY WIDTH, BAY DEPTH, AND COLUMN SPACING REQUIREMENTS (MAY 2014)	7
1.06	RENT AND OTHER CONSIDERATION (OCT 2021)	7
1.07	BROKER COMMISSION AND COMMISSION CREDIT (OCT 2016)	8
1.08	TERMINATION RIGHTS (OCT 2016)	9
1.09	RENEWAL RIGHTS (OCT 2016) INTENTIONALLY DELETED	9
1.10	DOCUMENTS INCORPORATED IN THE LEASE (OCT 2021)	9
1.11	TENANT IMPROVEMENT RENTAL ADJUSTMENT (OCT 2016)	9
1.12	TENANT IMPROVEMENT FEE SCHEDULE (OCT 2020)	9
1.13	BUILDING SPECIFIC AMORTIZED CAPITAL (SEP 2012)	10
1.14	BUILDING SPECIFIC AMORTIZED CAPITAL RENTAL ADJUSTMENT (SEP 2013) INTENTIONALLY DELETED	10
1.15	PERCENTAGE OF OCCUPANCY FOR TAX ADJUSTMENT (OCT 2021)	10
1.16	REAL ESTATE TAX-BASE (SEP 2013) INTENTIONALLY DELETED	10
1.17	OPERATING COST BASE (OCT 2016)	10
1.18	RATE FOR ADJUSTMENT FOR VACANT LEASED PREMISES (SEP 2013)	10
1.19	HOURLY OVERTIME HVAC RATES (OCT 2016) INTENTIONALLY DELETED	10
1.20	ADJUSTMENT FOR REDUCED SERVICES (OCT 2018) INTENTIONALLY DELETED	10
1.21	BUILDING IMPROVEMENTS (MAR 2016) INTENTIONALLY DELETED	10
1.22	HUBZONE SMALL BUSINESS CONCERNS ADDITIONAL PERFORMANCE REQUIREMENTS (MAR 2012) INTENTIONALLY DELETED	10
1.23	LESSOR'S UNIQUE ENTITY IDENTIFIER (OCT 2021)	10

SECTION 2 GENERAL TERMS, CONDITIONS, AND STANDARDS 11

2.01	DEFINITIONS AND GENERAL TERMS (OCT 2016)	11
2.02	AUTHORIZED REPRESENTATIVES (OCT 2016)	11
2.03	ALTERATIONS REQUESTED BY THE GOVERNMENT (OCT 2018)	12
2.04	WAIVER OF RESTORATION (OCT 2021)	12
2.05	PAYMENT OF BROKER (OCT 2021)	12
2.06	CHANGE OF OWNERSHIP/NOVATION (OCT 2021)	12
2.07	REAL ESTATE TAX ADJUSTMENT (JUN 2012)	13
2.08	ADJUSTMENT FOR VACANT PREMISES (OCT 2017)	14
2.09	OPERATING COSTS ADJUSTMENT (JUN 2012)	14
2.10	ADDITIONAL POST-AWARD FINANCIAL AND TECHNICAL DELIVERABLES (JUN 2012)	14
2.11	RELOCATION ASSISTANCE ACT (APR 2011)	15

SECTION 3 CONSTRUCTION STANDARDS AND SHELL COMPONENTS 16

3.01	LABOR STANDARDS (JAN 2022)	16
3.02	WORK PERFORMANCE (JUN 2012)	16
3.03	EXISTING FIT-OUT, SALVAGED, OR REUSED BUILDING MATERIAL (OCT 2019)	16
3.04	CONSTRUCTION WASTE MANAGEMENT (OCT 2021)	16
3.05	WOOD PRODUCTS (OCT 2019)	17
3.06	ADHESIVES AND SEALANTS (OCT 2019)	17
3.07	BUILDING SHELL REQUIREMENTS (OCT 2016)	17
3.08	RESPONSIBILITY OF THE LESSOR AND LESSOR'S ARCHITECT/ENGINEER (JUN 2012)	17
3.09	QUALITY AND APPEARANCE OF BUILDING (JUN 2012)	17
3.10	VESTIBULES (OCT 2020)	18
3.11	MEANS OF EGRESS (MAY 2015)	18
3.12	AUTOMATIC FIRE SPRINKLER SYSTEM (SEP 2013)	18
3.13	FIRE ALARM SYSTEM (SEP 2013)	18
3.14	ENERGY INDEPENDENCE AND SECURITY ACT (MAR 2016)	18
3.15	ELEVATORS (OCT 2020)	19
3.16	BUILDING DIRECTORY (OCT 2021)	20
3.17	FLAGPOLE (SEP 2013)	20
3.18	DEMOLITION (JUN 2012)	20
3.19	ACCESSIBILITY (FEB 2007)	20
3.20	CEILINGS (OCT 2019) THIS PARAGRAPH APPLIES TO THE OFFICE SPACE ONLY	20
3.21	EXTERIOR AND COMMON AREA DOORS AND HARDWARE (SEP 2013)	20
3.22	DOORS: IDENTIFICATION (APR 2011)	21
3.23	WINDOWS (OCT 2020)	21
3.24	PARTITIONS: GENERAL (OCT 2019)	21
3.25	PARTITIONS: PERMANENT (OCT 2019)	21
3.26	INSULATION: THERMAL, ACOUSTIC, AND HVAC (OCT 2019)	21
3.27	WALL FINISHES – SHELL (SEP 2015)	21
3.28	PAINTING – SHELL (OCT 2019)	22
3.29	FLOORS AND FLOOR LOAD (OCT 2019) THIS PARAGRAPH APPLIES TO THE OFFICE SPACE ONLY	22
3.30	FLOORS AND FLOOR LOAD (OCT 2019) – THIS PARAGRAPH APPLIES TO THE WAREHOUSE SPACE ONLY	22
3.31	FLOOR COVERING AND PERIMETERS – SHELL (SEP 2013)	22

3.32	MECHANICAL, ELECTRICAL, PLUMBING: GENERAL (APR 2011)	22
3.33	BUILDING SYSTEMS (APR 2011)	22
3.34	ELECTRICAL (OCT 2019)	22
3.35	ADDITIONAL ELECTRICAL CONTROLS (JUN 2012)	23
3.36	PLUMBING (JUN 2012)	23
3.37	DRINKING FOUNTAINS (OCT 2018)	23
3.38	RESTROOMS (OCT 2021)	23
3.39	PLUMBING FIXTURES: WATER CONSERVATION (OCT 2019)	24
3.40	JANITOR CLOSETS (SEP 2015)	24
3.41	HEATING, VENTILATION, AND AIR CONDITIONING - SHELL (OCT 2021)	24
3.42	TELECOMMUNICATIONS: DISTRIBUTION AND EQUIPMENT (SEP 2015)	25
3.43	TELECOMMUNICATIONS: LOCAL EXCHANGE ACCESS (JUN 2012)	25
3.44	LIGHTING: INTERIOR AND PARKING - SHELL (OCT 2020)	25
3.45	ACOUSTICAL REQUIREMENTS (JUN 2012)	26
3.46	SECURITY FOR NEW CONSTRUCTION (OCT 2019)	26
3.47	SEISMIC SAFETY FOR NEW CONSTRUCTION (OCT 2020)	27
3.48	FIRE PROTECTION FOR NEW CONSTRUCTION (APR 2015)	27
3.49	GREEN BUILDING RATING CERTIFICATION FOR NEW CONSTRUCTION (OCT 2016) INTENTIONALLY DELETED	27
3.50	GREEN BUILDING RATING CERTIFICATION FOR TENANT INTERIORS (OCT 2016)	27
3.51	INDOOR AIR QUALITY DURING CONSTRUCTION (OCT 2021)	27
3.52	SYSTEMS COMMISSIONING (OCT 2021)	28
3.53	DUE DILIGENCE AND NATIONAL ENVIRONMENTAL POLICY ACT REQUIREMENTS – LEASE (SEP 2014)	28
3.54	NATIONAL HISTORIC PRESERVATION ACT REQUIREMENTS - LEASE (SEP 2014)	28
3.55	DESIGN EXCELLENCE – LEASE (OCT 2016) INTENTIONALLY DELETED	29
3.56	DUMPSTER ENCLOSURE & SERVICES	29

SECTION 4 DESIGN, CONSTRUCTION, AND POST AWARD ACTIVITIES		30
4.01	SCHEDULE FOR COMPLETION OF SPACE (OCT 2020)	30
4.02	CONSTRUCTION DOCUMENTS (SEP 2012)	30
4.03	TENANT IMPROVEMENTS PRICE PROPOSAL (OCT 2020)	31
4.04	BUILDING SPECIFIC AMORTIZED CAPITAL (BSAC) PRICE PROPOSAL (SEP 2015) INTENTIONALLY DELETED	31
4.05	GREEN LEASE SUBMITTALS (OCT 2021)	31
4.06	CONSTRUCTION SCHEDULE AND INITIAL CONSTRUCTION MEETING (OCT 2020)	32
4.07	PROGRESS REPORTS (OCT 2020)	32
4.08	CONSTRUCTION INSPECTIONS (SEP 2015)	32
4.09	ACCESS BY THE GOVERNMENT PRIOR TO ACCEPTANCE (SEP 2013)	32
4.10	ACCEPTANCE OF SPACE AND CERTIFICATE OF OCCUPANCY (OCT 2021)	32
4.11	LEASE TERM COMMENCEMENT DATE AND RENT RECONCILIATION (OCT 2021)	33
4.12	AS-BUILT DRAWINGS (OCT 2021)	33
4.13	LIQUIDATED DAMAGES (JUN 2012) INTENTIONALLY DELETED	33
4.14	SEISMIC RETROFIT (SEP 2013)	33
4.15	LESSOR'S PROJECT MANAGEMENT RESPONSIBILITIES (OCT 2020)	33
4.16	GOVERNMENT PROJECT MANAGEMENT SYSTEM (OCT 2021)	34

SECTION 5 TENANT IMPROVEMENT COMPONENTS		35
5.01	TENANT IMPROVEMENT REQUIREMENTS (OCT 2016)	35
5.02	TENANT IMPROVEMENT SPECIFICATIONS (SEP 2015) INTENTIONALLY DELETED	35
5.03	FINISH SELECTIONS (SEP 2015)	35
5.04	WINDOW COVERINGS (JUN 2012)	35
5.05	DOORS: SUITE ENTRY (OCT 2019)	35
5.06	DOORS: INTERIOR (OCT 2019)	35
5.07	DOORS: HARDWARE (SEP 2013)	35
5.08	DOORS: IDENTIFICATION (JUN 2012)	35
5.09	PARTITIONS: SUBDIVIDING (OCT 2020)	35
5.10	WALL FINISHES (OCT 2019)	36
5.11	PAINTING – TI (OCT 2019)	36
5.12	FLOOR COVERINGS AND PERIMETERS (OCT 2019)	36
5.13	HEATING AND AIR CONDITIONING (JUN 2012)	37
5.14	ELECTRICAL: DISTRIBUTION (SEP 2015)	37
5.15	TELECOMMUNICATIONS: DISTRIBUTION AND EQUIPMENT (JUN 2012)	37
5.16	TELECOMMUNICATIONS: LOCAL EXCHANGE ACCESS (AUG 2008)	37
5.17	DATA DISTRIBUTION (OCT 2020)	37
5.18	ELECTRICAL, TELEPHONE, DATA FOR SYSTEMS FURNITURE (OCT 2020)	37
5.19	LIGHTING: INTERIOR AND PARKING – TI (SEP 2015)	37
5.20	AUTOMATIC FIRE SPRINKLER SYSTEM - TI (OCT 2016)	38

SECTION 6 UTILITIES, SERVICES, AND OBLIGATIONS DURING THE LEASE TERM		39
6.01	PROVISION OF SERVICES, ACCESS, AND NORMAL HOURS (JUN 2012)	39
6.02	UTILITIES (APR 2011) INTENTIONALLY DELETED	39

6.03	UTILITIES SEPARATE FROM RENTAL/BUILDING OPERATING PLAN (OCT 2020)	39
6.04	UTILITY CONSUMPTION REPORTING (OCT 2016)	39
6.05	HEATING AND AIR CONDITIONING (OCT 2020)	39
6.06	OVERTIME HVAC USAGE (OCT 2020) INTENTIONALLY DELETED	40
6.07	JANITORIAL SERVICES (OCT 2021)	40
6.08	SELECTION OF CLEANING PRODUCTS (OCT 2021)	40
6.09	SELECTION OF PAPER PRODUCTS (OCT 2021)	40
6.10	SNOW REMOVAL (OCT 2020)	40
6.11	MAINTENANCE AND TESTING OF SYSTEMS (SEP 2013)	41
6.12	MAINTENANCE OF PROVIDED FINISHES (OCT 2016)	41
6.13	ASBESTOS ABATEMENT (OCT 2021)	41
6.14	ONSITE LESSOR MANAGEMENT (APR 2011)	41
6.15	IDENTITY VERIFICATION OF PERSONNEL (OCT 2021)	41
6.16	SCHEDULE OF PERIODIC SERVICES (OCT 2020)	42
6.17	LANDSCAPING (OCT 2019)	42
6.18	LANDSCAPE MAINTENANCE (APR 2011)	43
6.19	RECYCLING (OCT 2021)	43
6.20	RANDOLPH-SHEPPARD COMPLIANCE (SEP 2013)	43
6.21	SAFEGUARDING AND DISSEMINATION OF CONTROLLED UNCLASSIFIED INFORMATION (CUI) BUILDING INFORMATION (FEB 2020)	43
6.22	INDOOR AIR QUALITY (OCT 2019)	44
6.23	RADON IN AIR (OCT 2016)	44
6.24	RADON IN WATER (JUN 2012)	45
6.25	HAZARDOUS MATERIALS (SEP 2013)	45
6.26	MOLD (OCT 2021)	45
6.27	OCCUPANT EMERGENCY PLANS (OCT 2020)	45
6.28	FLAG DISPLAY (OCT 2016)	45
7	ADDITIONAL TERMS AND CONDITIONS	46
7.01	SECURITY REQUIREMENTS (OCT 2021)	46
7.02	MODIFIED LEASE PARAGRAPHS (OCT 2016)	46
7.03	ADDENDUM TO GSA FORM 3517B, GENERAL CLAUSES, NO FEDERALLY ELECTED OFFICIALS TO BENEFIT (OCT 2018) INTENTIONALLY DELETED	46
7.05	PROVISIONAL ACCEPTANCE (FEB 2021)	46
7.06	SECURITY STANDARDS (JUN 2012)	46

DS
p

DS
BTS

DS
mp

7.07 EFFICIENCY OF LAYOUT-TEST FIT.....46

7.08 COLUMN SPACING.....47

7.09 PROHIBITED EXTERNAL ADJACENCIES47

7.10 AREA OF CONSIDERATION47

7.11 AMOUNT AND TYPE OF SPACE47

7.12 SITE REQUIREMENTS47

7.13 WINDOWS47

7.14 LEED.....47

7.15 UTILITIES SEPARATE FROM RENTAL/BUILDING OPERATING PLAN.....47

7.16 ROOF DESIGN47

7.18 SNOW REMOVAL STORAGE47

7.19 BUILDING IDENTIFICATION47

WAREHOUSE REQUIREMENTS.....48

7.21 OVERHEAD DOORS (SHELL).....49

7.22 CONCRETE APRON.....49

WAREYARD REQUIREMENTS49

7.24 WAREYARD ACCESS.....49

7.25 WAREYARD LIGHTING (SHELL).....49

7.26 WAREYARD PAVING (SHELL)49

7.27 GROUND SURFACE FINISHES WITHIN THE WAREYARD AREA:50

7.29 CONCRETE PAD FOR GOVERNMENT-PROVIDED FLAMMABLE STORAGE SHED.....50

7.30 GROUNDING AND BONDING REQUIREMENTS.....50

7.31 SECTION 2 - BUILDING GROUNDING AND BONDING REQUIREMENTS53

A. GENERAL.....53

B. GROUND RESISTANCE DESIGN53

C. GROUNDING AND BONDING REQUIREMENTS.....53

D. SURGE PROTECTION DEVICE REQUIREMENTS54

DS
p

DS
BTS

DS
mp

E. LIGHTNING PROTECTION REQUIREMENTS..... 54

F. CONTRUCTION DRAWING REVIEW 54

TABLE F– DRAWING REVIEW..... 54

TABLE G - PHOTO INSPECTION POINTS..... 55

TABLE H – ON-SITE INSPECTION POINTS 56

7.32 WAREYARD PERIMETER SECURITY (SHELL) 56

DS
p

DS
BTS

DS
mp

SECTION 1 THE PREMISES, RENT, AND OTHER TERMS

1.01 THE PREMISES (OCT 2016)

The Premises are described as follows:

A. Office and Related Space: Office – **25,750** rentable square feet (RSF), yielding **24,916** ANSI/BOMA Office Area (ABOA) square feet (SF) of office and related Space; and Warehouse – **10,820** rentable square feet (RSF) and ABOA SF, of warehouse space, all located on the **1st** floor, of the Building, as depicted on the floor plan(s) attached hereto as Exhibit **A-1**.

B. Wareyard: **140,000** square feet of secured (fenced), level, asphalt paved wareyard (refer to ASR for details).

C. Common Area Factor: The Common Area Factor (CAF), defined under Section 2 of the Lease, is established as **2.3337811** percent. This factor, rounded to the nearest whole percentage, shall be used for purposes of rental adjustments in accordance with the Payment Clause of the General Clauses.

D. INTENTIONALLY DELETED

1.02 EXPRESS APPURTENANT RIGHTS (SEP 2013)

The Government shall have the non-exclusive right to the use of Appurtenant Areas, and shall have the right to post Rules and Regulations Governing Conduct on Federal Property, Title 41, CFR, Part 102-74, Subpart C within such areas. The Government will coordinate with Lessor to ensure signage is consistent with Lessor's standards. Appurtenant to the Premises and included in the Lease are rights to use the following:

A. Parking: Within the secured wareyard, 60 parking spaces as depicted on the plan attached hereto as Exhibit **A-2**, are required for Government vehicles and shall be provided for the exclusive use of the Government. Wareyard shall include a 3-sided shed to store 26 UTVs, bulk storage of 10,000 SF and 16 trailers. Wareyard shall also have a canopy to cover 28 fire vehicles. In addition, the Lessor shall provide such additional parking spaces as required by the applicable code of the local government entity having jurisdiction over the Property.

B. Antennas, Satellite Dishes, and Related Transmission Devices: (1) Space located on the roof of the Building sufficient in size for the installation and placement of telecommunications equipment, (2) the right to access the roof of the Building, and (3) use of all Building areas (e.g., chases, plenums, etc.) necessary for the use, operation, and maintenance of such telecommunications equipment at all times during the term of this Lease.

1.03 TRUCK TURNING RADIUS REQUIREMENT (MAY 2014)

Adequate maneuvering room shall be provided for a semi-truck with 53' trailer. One-way design for service traffic is **required** in order to avoid the need for large turning areas.

1.04 CLEAR CEILING HEIGHT REQUIREMENTS (MAY 2014)

The warehouse space shall have a minimum clear ceiling height of **16 feet, 0 inches**, measured from floor to lowest obstruction. Bulkheads and hanging or surface mounted light fixtures which impeded traffic ways shall be avoided.

1.05 WAREHOUSE BAY WIDTH, BAY DEPTH, AND COLUMN SPACING REQUIREMENTS (MAY 2014)

Minimum Warehouse Bay Width, Bay Depth, and Column Spacing are as follows:

1. Bay Width: **18' 00"** (the distance from one side of the bay to the other side of the bay in linear feet and inches)
2. Bay Depth: **48' 00" minimum** (the distance from the front of the bay to the back of the bay in linear feet and inches)
3. Column Spacing: Any columns shall not interfere with the operation of the warehouse.

1.06 RENT AND OTHER CONSIDERATION (OCT 2021)

A. The Government shall pay the Lessor annual rent, payable in monthly installments in arrears, at the following rates:

	FIRM TERM YEARS 1 - 5	FIRM TERM YEARS 6 - 10	FIRM TERM YEARS 11 - 18	NON FIRM TERM YEARS 19 - 20
	ANNUAL RENT	ANNUAL RENT	ANNUAL RENT	ANNUAL RENT
SHELL RENT – COMBINED ¹	(b) (4)			
OPERATING COSTS – COMBINED ²				
TENANT IMPROVEMENTS RENT – COMBINED ³				
BUILDING SPECIFIC AMORTIZED CAPITAL (BSAC) – COMBINED ⁴				
TOTAL ANNUAL RENT⁵	\$1,127,596.96	\$1,169,186.96	\$1,227,774.46	\$1,159,059.50

¹Shell rent calculation:

p

BTS

mp

Office and Warehouse – (Firm Term) years 1-5 (b) (4) per RSF, years 6-10 (b) (4) per RSF, years 11-18 (b) (4) per RSF multiplied by the RSF stated under Paragraph 1.01 (Non Firm Term) (b) (4) per RSF multiplied by the RSF stated under Paragraph 1.01
The above rates per square foot are a blended rate combining the Office and Warehouse spaces.

²Operating Costs rent calculation:

Office and Warehouse – \$(b) (4) per RSF multiplied by the RSF stated under Paragraph 1.01. This is a blended rate

³Tenant Improvements - Combined Office and Warehouse space of (b) (4) are amortized at a rate of (b) (4) percent per annum over (b) (4) years.

⁴Building Specific Amortized Capital (BSAC) - Combined of (b) (4) are amortized at a rate of (b) (4) percent per annum over (b) (4) years

⁵Total Annual Rent does not reflect reduction for free rent (if applicable). See subparagraph C below.

B. INTENTIONALLY DELETED

C. INTENTIONALLY DELETED

D. INTENTIONALLY DELETED

E. Rent is subject to adjustment based upon a mutual on-site measurement of the Space upon acceptance, not to exceed **24,916** ABOA SF (Office) and **10,820** ABOA SF (Warehouse) based upon the methodology outlined under the "Payment" clause of GSA Form 3517.

F. Rent is subject to adjustment based upon the final Tenant Improvement (TI) cost to be amortized in the rental rate, as agreed upon by the parties subsequent to the Lease Award Date.

G. INTENTIONALLY DELETED

H. If the Government leases the Premises for less than a full calendar month, then rent shall be prorated based on the actual number of days leased for that month.

I. Rent shall be paid to Lessor by electronic funds transfer (EFT) in accordance with the provisions of the General Clauses. Rent shall be payable using the EFT information contained in the System for Award Management (SAM). In the event the EFT information changes, the Lessor shall be responsible for providing the updated information to SAM. Failure by the Lessor to maintain an active registration in SAM may result in delay of rental payments until such time as the SAM registration is activated.

J. Lessor shall provide to the Government, in exchange for the payment of rental and other specified consideration, the following:

1. The leasehold interest in the Property described herein in the paragraph entitled "The Premises."

2. All costs, expenses and fees to perform the work required for acceptance of the Premises in accordance with this Lease, including all costs for labor, materials, and equipment, professional fees, contractor fees, attorney fees, permit fees, inspection fees, and similar such fees, and all related expenses.

3. Performance or satisfaction of all other obligations set forth in this Lease; and all services, utilities (with the exclusion of **electricity, gas and water**), maintenance required for the proper operation of the Property, the Building, and the Leased Premises, in accordance with the terms of the Lease, including, but not limited to, all inspections, modifications, repairs, replacements and improvements required to be made thereto to meet the requirements of this Lease. The Government shall be responsible for paying the cost of **electricity and gas** directly to the utility provider. The Lessor shall ensure that such utilities are separately metered. The Lessor shall provide and install as part of shell rent, separate meters for utilities. Sub-meters are not acceptable. The Lessor shall furnish in writing to the LCO, prior to occupancy by the Government, a record of the meter numbers and verification that the meters measure Government usage only. Proration is not permissible. In addition, an automatic control system shall be provided to assure compliance with heating, ventilation, and air conditioning requirements.

K. For succeeding Leases with an incumbent Lessor where the Government is currently in occupancy and possession of the leased Premises and where the Lease requires the Lessor to perform alterations using either the TIA or BSAC, the amortized tenant improvement rent and/or BSAC rent will not commence until the alterations are complete and accepted by the Government. Upon acceptance of these improvements, the Government will commence payment of the tenant improvement and/or BSAC rent as stipulated under the Lease, in addition to payment of the tenant improvement and/or BSAC rent for the period starting from the Lease Term Commencement Date to the date of tenant improvements/BSAC acceptance by the Government (such rent payment will not include any additional interest). Alternatively, the Government may elect to re-amortize the tenant improvements/BSAC over the remaining Firm Term of the Lease, at the amortization rate stipulated in the Lease. In the event the Government does not use all the TIA or BSAC, then the rental payments will be adjusted in accordance with the provisions of the Lease (e.g., de-amortization).

1.07 BROKER COMMISSION AND COMMISSION CREDIT (OCT 2016)

A. **DTZ AMERICAS, INC. DBA CUSHMAN & WAKEFIELD, U.S., INC.** (Broker) is the authorized real estate Broker representing GSA in connection with this Lease transaction. The total amount of the Commission is **\$597,341.35** and is earned upon Lease execution, payable according to the Commission Agreement signed between the Lessor and Broker. Only (b) (4) of the Commission will be payable to **DTZ AMERICAS, INC. DBA CUSHMAN & WAKEFIELD, U.S., INC.** with the remaining (b) (4), which is the Commission Credit, to be credited to the shell rental portion of the annual rental payments due and owing to fully recapture this Commission Credit. The reduction in shell rent shall commence with the first month of the rental payments and continue until the credit has been fully recaptured in equal monthly installments over the shortest time practicable.

B. Notwithstanding the "Rent and Other Consideration" paragraph of this Lease, the shell rental payments due and owing under this Lease shall be reduced to recapture fully this Commission Credit. The reduction in shell rent shall commence with the first month of the rental payments and continue as indicated in this schedule for adjusted Monthly Rent:

Month 1 Rental Payment (b) (4) minus prorated Commission Credit of (b) (4) equals (b) (4) adjusted 1st Month's Rent.*

Month 2 Rental Payment (b) (4) minus prorated Commission Credit of (b) (4) equals (b) (4) adjusted 2nd Month's Rent.*

* Subject to change based on adjustments outlined under the paragraph "Rent and Other Consideration."

1.08 TERMINATION RIGHTS (OCT 2016)

The Government may terminate this Lease, in whole or in parts, at any time effective after the Firm Term of this Lease, by providing not less than 90 days' prior written notice to the Lessor. The effective date of the termination shall be the day following the expiration of the required notice period or the termination date set forth in the notice, whichever is later. No rental shall accrue after the effective date of termination.

1.09 RENEWAL RIGHTS (OCT 2016)INTENTIONALLY DELETED

1.10 DOCUMENTS INCORPORATED IN THE LEASE (OCT 2021)

The following documents are attached to and made part of the Lease:

DOCUMENT NAME	NO. OF PAGES	EXHIBIT
FLOOR PLAN(S)	1	A-1
SITE PLAN(S)	1	A-2
TEST FITS	1	A-3
PARKING PLAN(S)	1	B
BUILDING ELEVATIONS	2	C
AGENCY REQUIREMENTS	117	D-1
	6	D-2
SECURITY REQUIREMENTS	8	E-1
SECURITY UNIT PRICE LIST	4	E-2
GSA FORM 3517B GENERAL CLAUSES	17	F
SEISMIC FORM C, PRE-AWARD COMMITMENT TO CONSTRUCT A NEW BUILDING	1	G
DOL WAGE DETERMINATION 07/01/2022	5	H
REVISION(S) TO LEASE ISSUED UNDER RLP AMENDMENT NUMBER(S) 1	4	I
CATEX	120	J

1.11 TENANT IMPROVEMENT RENTAL ADJUSTMENT (OCT 2016)

A. The Tenant Improvement Allowance (TIA) for purposes of this Lease is \$53.06 per ABOA SF for the Office space and \$8.84 per ABOA SF for the Warehouse space. The TIA is the amount that the Lessor shall make available for the Government to be used for TIs. This amount is amortized in the rent over the Firm Term of this Lease at an annual interest rate of 6.25 percent.

B. The Government, at its sole discretion, shall make all decisions as to the use of the TIA. The Government may use all or part of the TIA. The Government may return to the Lessor any unused portion of the TIA in exchange for a decrease in rent according to the agreed-upon amortization rate over the Firm Term.

C. The Government may elect to make lump sum payments for any or all work covered by the TIA. That part of the TIA amortized in the rent shall be reduced accordingly. At any time after occupancy and during the Firm Term of the Lease, the Government, at its sole discretion, may elect to pay lump sum for any part or all of the remaining unpaid amortized balance of the TIA. If the Government elects to make a lump sum payment for the TIA after occupancy, the payment of the TIA by the Government will result in a decrease in the rent according to the amortization rate over the Firm Term of the Lease.

D. If it is anticipated that the Government will spend more than the identified TIA, the Government may elect to:

1. Reduce the TI requirements;
2. Pay lump sum for the overage upon substantial completion in accordance with the "Acceptance of Space and Certificate of Occupancy" paragraph;
3. Negotiate an increase in the rent.

1.12 TENANT IMPROVEMENT FEE SCHEDULE (OCT 2020)

For pricing TI costs, the following rates shall apply for the initial build-out of the Space.

	INITIAL BUILD-OUT
ARCHITECT/ENGINEER (A/E) FEES (% OF TI CONSTRUCTION COSTS)	6.25%
LESSOR'S PROJECT MANAGEMENT FEE (% OF PFC CONSTRUCTION COSTS)	4.0%

1.13 BUILDING SPECIFIC AMORTIZED CAPITAL (SEP 2012)

For purposes of this Lease, the Building Specific Amortized Capital (BSAC) is **\$2.59** per ABOA SF. The Lessor will make the total BSAC amount available to the Government, which will use the funds for security related improvements. This amount is amortized in the rent over the Firm Term of this lease at an annual interest rate of **6.25** percent.

1.14 ~~BUILDING SPECIFIC AMORTIZED CAPITAL RENTAL ADJUSTMENT (SEP 2013)~~ INTENTIONALLY DELETED**1.15 PERCENTAGE OF OCCUPANCY FOR TAX ADJUSTMENT (OCT 2021)**

- A. As of the Lease Award Date, the Government's Percentage of Occupancy, as defined in the "Real Estate Tax Adjustment" paragraph of this Lease is **100** percent. The Percentage of Occupancy is derived by dividing the total Government Space of **36,570** RSF by the total Building space of **36,570** RSF. The tax parcel number is currently **SG-6714-H** and may be updated in the future.
- B. All relevant tax adjustment documentation (e.g., copies of paid tax receipts, invoices) must be submitted online via the GSA Real Estate Tax Portal at [RET.GSA.GOV](https://ret.gsa.gov) or a successor portal.

1.16 ~~REAL ESTATE TAX BASE (SEP 2013)~~ INTENTIONALLY DELETED**1.17 OPERATING COST BASE (OCT 2016)**

The parties agree, for the purpose of applying the paragraph titled "Operating Costs Adjustment," that the Lessor's base rate for operating costs shall be **\$4.08932** per RSF for the Office space and **\$3.19316** per RSF for the Warehouse space. The blended rate is **\$3.8241728**.

1.18 RATE FOR ADJUSTMENT FOR VACANT LEASED PREMISES (SEP 2013)

In accordance with the paragraph entitled "Adjustment for Vacant Premises," if the Government fails to occupy or vacates the entire or any portion of the Premises prior to expiration of the term of the Lease, the operating costs paid by the Government as part of the rent shall be reduced by **(b) (4)** per ABOA SF of Space vacated by the Government.

1.19 ~~HOURLY OVERTIME HVAC RATES (OCT 2016)~~ INTENTIONALLY DELETED**1.20 ~~ADJUSTMENT FOR REDUCED SERVICES (OCT 2018)~~ INTENTIONALLY DELETED****1.21 ~~BUILDING IMPROVEMENTS (MAR 2016)~~ INTENTIONALLY DELETED****1.22 ~~HUBZONE SMALL BUSINESS CONCERNS ADDITIONAL PERFORMANCE REQUIREMENTS (MAR 2012)~~ INTENTIONALLY DELETED****1.23 LESSOR'S UNIQUE ENTITY IDENTIFIER (OCT 2021)**

Lessor's Unique Entity Identifier

UEI-DUNS: **(b) (4)**

UEI-SAM: **(b) (4)**

DS
p

DS
BTS

DS
mp

SECTION 2 GENERAL TERMS, CONDITIONS, AND STANDARDS

2.01 DEFINITIONS AND GENERAL TERMS (OCT 2016)

Unless otherwise specifically noted, all terms and conditions set forth in this Lease shall be interpreted by reference to the following definitions, standards, and formulas:

- A. Appurtenant Areas. Appurtenant Areas are defined as those areas and facilities on the Property that are not located within the Premises, but for which rights are expressly granted under this Lease, or for which rights to use are reasonably necessary or reasonably anticipated with respect to the Government's enjoyment of the Premises and express appurtenant rights.
- B. Broker. If GSA awarded this Lease using a contract real estate broker, Broker shall refer to GSA's broker.
- C. Building. Building(s) situated on the Property in which the Premises are located.
- D. Commission Credit. If GSA awarded this Lease using a Broker, and the Broker agreed to forego a percentage of its commission to which it is entitled in connection with the award of this Lease, the amount of this credit is referred to as the "Commission Credit."
- E. Common Area Factor. The "Common Area Factor" (CAF) is a conversion factor determined by the Building owner and applied by the owner to the ABOA SF to determine the RSF for the leased Space. The CAF is expressed as a percentage of the difference between the amount of rentable SF and ABOA SF, divided by the ABOA SF. For example, 11,500 RSF and 10,000 ABOA SF will have a CAF of 15% $[(11,500 \text{ RSF} - 10,000 \text{ ABOA SF}) / 10,000 \text{ ABOA SF}]$. For the purposes of this Lease, the CAF shall be determined in accordance with the applicable ANSI/BOMA standard for the type of space to which the CAF shall apply.
- F. Contract. "Contract" shall mean this Lease.
- G. Contractor. "Contractor" shall mean Lessor.
- H. Days. All references to "day" or "days" in this Lease shall mean calendar days, unless specified otherwise.
- I. FAR. All references to the FAR shall be understood to mean the Federal Acquisition Regulation, codified at 48 CFR Chapter 1.
- J. Firm Term/Non-Firm Term. The Firm Term is that part of the Lease term that is not subject to termination rights. The Non-Firm Term is that part of the Lease term following the end of the Firm Term.
- K. GSAR. All references to the GSAR shall be understood to mean the GSA supplement to the FAR, codified at 48 CFR Chapter 5.
- L. Lease Term Commencement Date. The date on which the lease term commences.
- M. Lease Award Date. The date the LCO executes the Lease and mails or otherwise furnishes written notification of the executed Lease to the successful Offeror (date on which the parties' obligations under the Lease begin).
- N. Premises. The Premises are defined as the total Office Area or other type of Space, together with all associated common areas, described in Section 1 of this Lease, and delineated by plan in the attached exhibit. Parking and other areas to which the Government has rights under this Lease are not included in the Premises.
- O. Property. Defined as the land and Buildings in which the Premises are located, including all Appurtenant Areas (e.g., parking areas) to which the Government is granted rights.
- P. Rentable Space or Rentable Square Feet (RSF). Rentable Space is the area for which a tenant is charged rent. It is determined by the Building owner and may vary by city or by building within the same city. The Rentable Space may include a share of Building support/common areas such as elevator lobbies, Building corridors, and floor service areas. Floor service areas typically include restrooms, janitor rooms, telephone closets, electrical closets, and mechanical rooms. The Rentable Space does not include vertical building penetrations and their enclosing walls, such as stairs, elevator shafts, and vertical ducts. Rentable Square Feet is calculated using the following formula for each type of Space (e.g., office, warehouse, etc.) included in the Premises: $\text{ABOA SF of Space} \times (1 + \text{CAF}) = \text{RSF}$.
- Q. Space. The Space shall refer to that part of the Premises to which the Government has exclusive use, such as Office Area, or other type of Space. Parking areas to which the Government has rights under this Lease are not included in the Space.
- R. Warehouse and Office Area. For the purposes of this Lease, Space shall be measured in accordance with the standard (Z65.1-1996) provided by American National Standards Institute/Building Owners and Managers Association (ANSI/BOMA) for Office Area, which means "the area where a tenant normally houses personnel and/or furniture, for which a measurement is to be computed." References to ABOA mean ANSI/BOMA Office Area.
- S. Working Days. Working Days shall mean weekdays, excluding Saturdays and Sundays and Federal holidays.

2.02 AUTHORIZED REPRESENTATIVES (OCT 2016)

Signatories to this Lease shall have full authority to bind their respective principals with regard to all matters relating to this Lease. No other persons shall be understood to have any authority to bind their respective principals, except to the extent that such authority may be explicitly delegated by notice to the other

party, or to the extent that such authority is transferred by succession of interest. The Government shall have the right to substitute its Lease Contracting Officer (LCO) by notice, without an express delegation by the prior LCO.

2.03 ALTERATIONS REQUESTED BY THE GOVERNMENT (OCT 2018)

A. The Government may request the Lessor to provide alterations during the term of the Lease. Alterations will be ordered by issuance of a Lease Amendment, GSA Form 300, Order for Supplies or Services, or a tenant agency-approved form when specifically authorized to do so by the LCO. The General Services Administration Acquisition Manual ("GSAM") clause, 552.270-31, Prompt Payment, including its invoice requirements, shall apply to orders for alterations. All orders are subject to the terms and conditions of this Lease and may be placed by the LCO or a warranted contracting officer's representative (COR) in GSA or the tenant agency when specifically authorized to do so by the LCO, subject to the threshold limitation below.

B. Orders for alterations issued by an authorized COR are limited to no more than \$250,000 (LCOs are not subject to this threshold). This threshold will change according to future adjustments of the simplified acquisition threshold (see FAR 2.101). The LCO will provide the Lessor with a list of tenant agency officials authorized to place orders and will specify any limitations on the authority delegated to tenant agency officials. The tenant agency officials are not authorized to deal with the Lessor on any other matters.

C. Payments for alterations ordered by the tenant agency under the authorization described in sub-paragraph B will be made directly by the tenant agency placing the order.

2.04 WAIVER OF RESTORATION (OCT 2021)

Lessor shall have no right to require the Government to restore the Premises upon expiration or earlier termination (full or partial) of the Lease, and waives all claims against the Government for:

- a) waste, or,
- b) damages, or restoration arising from or related to:
 - (1) the Government's normal and customary use of the Premises during the term of the Lease (including any extensions thereof), as well as
 - (2) any initial or subsequent alteration to the Premises regardless of whether such alterations are performed by the Lessor or by the Government.

At its sole option, the Government may abandon property in the Space following expiration or earlier termination (full or partial) of the Lease, in which case the property will become the property of the Lessor and the Government will be relieved of any liability in connection therewith.

2.05 PAYMENT OF BROKER (OCT 2021)

If GSA awarded the Lease through its Broker, the Lessor shall pay GSA's Broker its portion of the commission according to the Commission Agreement signed between the Lessor and Broker. "Its portion of the commission" means the agreed-upon commission to GSA's Broker minus the Commission Credit specified in the Lease or Lease Amendment.

2.06 CHANGE OF OWNERSHIP/NOVATION (OCT 2021)

A. If during the term of the Lease, title to the Property is transferred or the Lessor changes its legal name, the Lessor and its successor shall comply with the requirements of FAR Subpart 42.12. If title is transferred, the Lessor shall notify the Government within five days of the transfer of title.

B. The Government and the Lessor may execute a Change of Name Agreement if the Lessor is changing only its legal name, and the Government's and the Lessor's respective rights and obligations remain unaffected.

C. If title to the Property is transferred, the Government, the original Lessor (Transferor), and the new owner or assignee (Transferee) shall execute a Novation Agreement providing for the transfer of Transferor's rights and obligations under the Lease to the Transferee. When executed on behalf of the Government, a Novation Agreement will be made part of the Lease via Lease Amendment.

D. In addition to all documents required by FAR 42.1204, the LCO may request additional information (e.g., copy of the deed, bill of sale, certificate of merger, contract, court decree, articles of incorporation, operation agreement, partnership certificate of good standing, etc.) from the Transferor or Transferee to verify the parties' representations regarding the transfer, and to determine whether the transfer of the Lease is in the Government's interest.

E. If the LCO determines that recognizing the Transferee as the Lessor will not be in the Government's interest, the Transferor shall remain fully liable to the Government for the Transferee's performance of obligations under the Lease, notwithstanding the transfer. Under no condition shall the Government be obligated to release the Transferor of obligations prior to (a) the rent commencement date; and (b) any amounts due and owing to the Government under the Lease that have been paid in full or completely set off against the rental payments due under the Lease.

F. As a condition for being recognized as the Lessor and entitlement to receiving rent, the Transferee must register in the System for Award Management (SAM) for purposes of "All Awards" (See FAR 52.232-33), and complete all required representations and certifications within SAM. In addition, for leases FSL III or above, the Transferee must also complete a Foreign Ownership and Financing Representation for High Security Leased Space. This representation must be completed annually.

G. If title to the Property is transferred, rent shall continue to be paid to the original Lessor, subject to the Government's rights as provided for in this Lease. The Government's obligation to pay rent to the Transferee shall commence on the effective date of the Lease Amendment incorporating the Novation Agreement. The Lease Amendment will not be issued until the Government has received all information reasonably required by the LCO, the Government has determined that recognizing the Transferee as the Lessor is in the Government's interest (which determination will be prompt and not unreasonably withheld), and the Transferee has met all conditions specified in sub-paragraph F. The original Lessor must maintain an active registration in SAM until the Novation process is complete.

DS
P

DS
BTS

DS
MP

2.07 REAL ESTATE TAX ADJUSTMENT (JUN 2012)

A. Purpose: This paragraph provides for adjustment in the rent (tax adjustment) to account for increases or decreases in Real Estate Taxes for the Property after the establishment of the Real Estate Tax Base, as those terms are defined herein. Tax adjustments shall be calculated in accordance with this paragraph.

B. Definitions: The following definitions apply to the use of the terms within this paragraph:

Property is defined as the land and Buildings in which the Premises are located, including all Appurtenant Areas (e.g., parking areas to which the Government is granted rights).

Real Estate Taxes are those taxes that are levied upon the owners of real property by a Taxing Authority (as hereinafter defined) of a state or local Government on an ad valorem basis to raise general revenue for funding the provision of government services. The term excludes, without limitation, special assessments for specific purposes, assessments for business improvement districts, and/or community development assessments.

Taxing Authority is a state, commonwealth, territory, county, city, parish, or political subdivision thereof, authorized by law to levy, assess, and collect Real Estate Taxes.

Tax Year refers to the 12-month period adopted by a Taxing Authority as its fiscal year for assessing Real Estate Taxes on an annual basis.

Tax Abatement is an authorized reduction in the Lessor's liability for Real Estate Taxes below that determined by applying the generally applicable real estate tax rate to the Fully Assessed (as hereinafter defined) valuation of the Property.

Unadjusted Real Estate Taxes are the full amount of Real Estate Taxes that would be assessed for the Property for one full Tax Year without regard to the Lessor's entitlement to any Tax Abatements (except if such Tax Abatement came into effect after the date of award of the Lease), and not including any late charges, interest or penalties. If a Tax Abatement comes into effect after the date of award of the Lease, "unadjusted Real Estate Taxes" are the full amount of Real Estate Taxes assessed for the Property for one full Tax Year, less the amount of such Tax Abatement, and not including any late charges, interest, or penalties.

Real Estate Tax Base is the unadjusted Real Estate Taxes for the first full Tax Year following the commencement of the Lease term. If the Real Estate Taxes for that Tax Year are not based upon a Full Assessment of the Property, then the Real Estate Tax Base shall be the Unadjusted Real Estate Taxes for the Property for the first full Tax Year for which the Real Estate Taxes are based upon a Full Assessment. Such first full Tax Year may be hereinafter referred to as the Tax Base Year. Alternatively, the Real Estate Tax Base may be an amount negotiated by the parties that reflects an agreed upon base for a Fully Assessed value of the Property.

The Property is deemed to be Fully Assessed (and Real Estate Taxes are deemed to be based on a Full Assessment) only when a Taxing Authority has, for the purpose of determining the Lessor's liability for Real Estate Taxes, determined a value for the Property taking into account the value of all improvements contemplated for the Property pursuant to the Lease, and issued to the Lessor a tax bill or other notice of levy wherein the Real Estate Taxes for the full Tax Year are based upon such Full Assessment. At no time prior to the issuance of such a bill or notice shall the Property be deemed Fully Assessed.

Percentage of Occupancy refers to that portion of the Property exclusively occupied or used by the Government pursuant to the Lease. For Buildings, the Percentage of Occupancy is determined by calculating the ratio of the RSF occupied by the Government pursuant to the Lease to the total RSF in the Building or Buildings so occupied and shall not take into account the Government's ancillary rights including, but not limited to, parking or roof space for antennas (unless facilities for such ancillary rights are separately assessed). This percentage shall be subject to adjustment to take into account increases or decreases for Space leased by the Government or for rentable space on the Property.

C. Adjustment for changes in Real Estate Taxes. After the Property is Fully Assessed, the Government shall pay its share of any increases and shall receive its share of any decreases in the Real Estate Taxes for the Property, such share of increases or decreases to be referred to herein as "tax adjustment." The amount of the tax adjustment shall be determined by multiplying the Government's Percentage of Occupancy by the difference between the current year Unadjusted Real Estate Taxes and the Real Estate Tax Base, less the portion of such difference not paid due to a Tax Abatement (except if a Tax Abatement comes into effect after the date of award of the Lease). If a Tax Abatement comes into effect after the date of award of the Lease, the amount of the tax adjustment shall be determined by multiplying the Government's Percentage of Occupancy by the difference between the current year Unadjusted Real Estate Taxes and the Real Estate Tax Base. The Government shall pay the tax adjustment in a single annual lump sum payment to the Lessor. In the event that this tax adjustment results in a credit owed to the Government, the Government may elect to receive payment in the form of a rental credit or lump sum payment.

If the Property contains more than one separately assessed parcel, then more than one tax adjustment shall be determined based upon the Percentage of Occupancy, Real Estate Tax Base, and Real Estate Taxes for each respective parcel.

After commencement of the Lease term, the Lessor shall provide to the LCO copies of all real estate tax bills for the Property, all documentation of Tax Abatements, credits, or refunds, if any, and all notices which may affect the assessed valuation of the Property, for the Tax Year prior to the commencement of the Lease Term, and all such documentation for every year following. Lessor acknowledges that the LCO shall rely on the completeness and accuracy of these submissions in order to establish the Real Estate Tax Base and to determine tax adjustments. The LCO may memorialize the establishment of the Real Estate Tax Base by issuing a unilateral administrative lease amendment indicating the base year, the amount of the Real Estate Tax Base, and the Government's Percentage of Occupancy.

The Real Estate Tax Base is subject to adjustment when increases or decreases to Real Estate Taxes in any Tax Year are attributable to (a) improvements or renovations to the Property not required by this Lease, or (b) changes in net operating income for the Property not derived from this Lease. If either condition results in a change to the Real Estate Taxes, the LCO may re-establish the Real Estate Tax Base as the Unadjusted Real Estate Taxes for the Tax Year the Property is reassessed under such condition, less the amount by which the Unadjusted Real Estate Taxes for the Tax Year prior to reassessment exceeds the prior Real Estate Tax Base.

If this Lease includes any options to renew the term of the Lease, or be otherwise extended, the Real Estate Tax Base for determining tax adjustments during the renewal term or extension shall be the last Real Estate Tax Base established during the base term of the Lease.

If any Real Estate Taxes for the Property are retroactively reduced by a Taxing Authority during the term of the Lease, the Government shall be entitled to a proportional share of any tax refunds to which the Lessor is entitled, calculated in accordance with this Paragraph. Lessor acknowledges that it has an affirmative duty to disclose to the Government any decreases in the Real Estate Taxes paid for the Property during the term of the Lease. Lessor shall annually provide to the LCO all relevant tax records for determining whether a tax adjustment is due, irrespective of whether it seeks an adjustment in any Tax Year.

If the Lease terminates before the end of a Tax Year, or if rent has been suspended, payment for the real estate tax increase due because of this section for the Tax Year will be prorated based on the number of days that the Lease and the rent were in effect. Any credit due the Government after the expiration or earlier termination of the Lease shall be made by a lump sum payment to the Government or as a rental credit to any succeeding Lease, as determined in the LCO's sole discretion. Lessor shall remit any lump sum payment to the Government within 15 calendar days of payment or credit by the Taxing Authority to Lessor or Lessor's designee. If the credit due to the Government is not paid by the due date, interest shall accrue on the late payment at the rate established by the Secretary of the Treasury under Section 12 of the Contract Disputes Act of 1978, as amended (41 USC § 611), that is in effect on the day after the due date. The interest penalty shall accrue daily on the amount of the credit and shall be compounded in 30-day increments inclusive from the first day after the due date through the payment date. The Government shall have the right to pursue the outstanding balance of any tax credit using all such collection methods as are available to the United States to collect debts. Such collection rights shall survive the expiration of this Lease.

In order to obtain a tax adjustment, the Lessor shall furnish the LCO with copies of all paid tax receipts, or other similar evidence of payment acceptable to the LCO, and a proper invoice (as described in GSA Form 3517, General Clauses, 552.270-31, Prompt Payment) for the requested tax adjustment, including the calculation thereof. All such documents must be received by the LCO within 60 calendar days after the last date the real estate tax payment is due from the Lessor to the Taxing Authority without payment of penalty or interest. FAILURE TO SUBMIT THE PROPER INVOICE AND EVIDENCE OF PAYMENT WITHIN SUCH TIME FRAME SHALL CONSTITUTE A WAIVER OF THE LESSOR'S RIGHT TO RECEIVE A TAX ADJUSTMENT PURSUANT TO THIS PARAGRAPH FOR THE TAX YEAR AFFECTED.

Tax Appeals. If the Government occupies more than 50 percent of the Building by virtue of this and any other Government Lease(s), the Government may, upon reasonable notice, direct the Lessor to initiate a tax appeal, or the Government may elect to contest the assessed valuation on its own behalf or jointly on behalf of Government and the Lessor. If the Government elects to contest the assessed valuation on its own behalf or on behalf of the Government and the Lessor, the Lessor shall cooperate fully with this effort, including, without limitation, furnishing to the Government information necessary to contest the assessed valuation in accordance with the filing requirements of the Taxing Authority, executing documents, providing documentary and testimonial evidence, and verifying the accuracy and completeness of records. If the Lessor initiates an appeal at the direction of the Government, the Government shall have the right to approve the selection of counsel who shall represent the Lessor with regard to such appeal, which approval shall not be unreasonably withheld, conditioned or delayed, and the Lessor shall be entitled to a credit in the amount of its reasonable expenses in pursuing the appeal.

2.08 ADJUSTMENT FOR VACANT PREMISES (OCT 2017)

A. If the Government fails to occupy any portion of the leased Premises or vacates the Premises in whole or in part prior to expiration of the term of the Lease, the rental rate and the base for operating cost adjustments will be reduced using the figure specified in the "Rate for Adjustment for Vacant Leased Premises" paragraph of this Lease.

B. If no rate reduction has been established in this Lease, the rate will be reduced by that portion of the costs per ABOA SF of operating expenses not required to maintain the Space.

C. Said reduction shall occur after the Government gives 30 calendar days' prior notice to the Lessor and shall continue in effect until the Government occupies the vacant Premises or the Lease expires or is terminated.

2.09 OPERATING COSTS ADJUSTMENT (JUN 2012)

A. Beginning with the second year of the Lease and each year thereafter, the Government shall pay annual incremental adjusted rent for changes in costs for cleaning services, supplies, materials, maintenance, trash removal, landscaping, water, sewer charges, heating, electricity, and certain administrative expenses attributable to occupancy.

B. The amount of adjustment will be determined by multiplying the base rate by the annual percent of change in the Cost-of-Living Index. The percent change will be computed by comparing the index figure published for the month prior to the Lease Term Commencement Date with the index figure published for the month prior which begins each successive 12-month period. For example, a Lease which commences in June of 2005 would use the index published for May of 2005, and that figure would be compared with the index published for May of 2006, May of 2007, and so on, to determine the percent change. The Cost-of-Living Index will be measured by the Department of Labor revised Consumer Price Index for Urban Wage Earners and Clerical Workers (CPI-W), U.S. city average, all items, (1982 to 1984 = 100) published by the Bureau of Labor Statistics. Payment will be made with the monthly installment of fixed rent. Rental adjustments will be effective on the anniversary date of the Lease; however, payment of the adjusted rental rate will become due on the first workday of the second month following the publication of the Cost-of-Living Index for the month prior to the commencement of each 12-month period.

C. In the event of any decreases in the Cost-of-Living Index occurring during the term of the occupancy under the Lease, the rental amount will be reduced accordingly. The amount of such reductions will be determined in the same manner as increases in rent provided under this paragraph.

D. If the Government exercises an option to extend the Lease term at the same rate as that of the original term, the option price will be based on the adjustment during the original term. Annual adjustments will continue.

2.10 ADDITIONAL POST-AWARD FINANCIAL AND TECHNICAL DELIVERABLES (JUN 2012)

A. If the Lessor is a HUBZone small business concern (SBC) that did not waive the price evaluation preference, the Lessor shall provide a certification within 10 days after Lease award to the LCO (or representative designated by the LCO) that the Lessor was an eligible HUBZone SBC on the date of award. If

it is determined within 20 days after award that a HUBZone SBC Offeror that has been awarded the Lease was not an eligible HUBZone SBC at the time of award, and the HUBZone SBC Lessor failed to provide the LCO with information regarding a change to its HUBZone eligibility prior to award, then the Lease shall be subject, at the LCO's discretion, to termination, and the Government will be relieved of all obligations to the Lessor in such an event and not be liable to the Lessor for any costs, claims or damages of any nature whatsoever.

- B. Within **20** days after Lease award, the Lessor shall provide to the LCO (or representative designated by the LCO) evidence of:
1. A firm commitment of funds in an amount sufficient to perform the work.
 2. The names of at least two proposed construction contractors, as well as evidence of the contractors' experience, competency, and performance capabilities with construction similar in scope to that which is required herein.
 3. The license or certification to practice in the state where the Building is located from the individual(s) and/or firm(s) providing architectural and engineering design services.
- C. The Government shall have the right to withhold approval of design intent drawings (DIDs) until the conditions specified in sub-paragraphs A and B have been satisfied.
- D. Within ten (10) calendar days after the LCO issues the Notice To Proceed (NTP) for TI construction, the Lessor shall provide to the LCO evidence of:
1. Award of a construction contract for TIs with a firm completion date. This date must be in accordance with the construction schedule for TIs as described in the "Schedule for Completion of Space" paragraph of this Lease.
 2. Issuance of required permits for construction of the TIs.

2.11 RELOCATION ASSISTANCE ACT (APR 2011)

- A. If the Lessor satisfies the requirements of this Lease by performing new construction on an improved site, and such new construction will result in the displacement of individuals or businesses, the Lessor shall be responsible for payment of relocation costs in accordance with the Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970 (Public Law 91-646), as amended, and the implementing regulations at 49 CFR Part 24.
- B. The Lessor shall give GSA the name of the person and agency to be providing the relocation assistance to site tenants. In addition, the Lessor must provide background information about the relocation agency and references for which the relocation agent has performed relocation assistance in the past.

DS
p

DS
BTS

DS
mp

SECTION 3 CONSTRUCTION STANDARDS AND SHELL COMPONENTS

3.01 LABOR STANDARDS (JAN 2022)

If the Lessor proposes to satisfy the requirements of this Lease through the construction of a new Building or the complete rehabilitation or reconstruction of an existing Building, and the Government will be the sole or predominant tenant such that any other use of the Building will be functionally or quantitatively incidental to the Government's use and occupancy, the following FAR clauses shall apply to all work (including shell and TIs) performed prior to the Government's acceptance of space as substantially complete. Full text versions of these clauses are available upon request from the LCO. Full text versions are also available at [HTTPS://WWW.ACQUISITION.GOV/?Q=BROWSEFAR](https://www.acquisition.gov/?Q=BROWSEFAR).

- 52.222-4 Contract Work Hours and Safety Standards Act—Overtime Compensation
- 52.222-5 Construction Wage Rate Requirements - Secondary Site of the Work
- 52.222-6 Construction Wage Rate Requirements
- 52.222-7 Withholding of Funds
- 52.222-8 Payrolls and Basic Records
- 52.222-9 Apprentices and Trainees
- 52.222-10 Compliance with Copeland Act Requirements
- 52.222-11 Subcontracts (Labor Standards)
- 52.222-12 Contract Termination—Debarment
- 52.222-13 Compliance with Construction Wage Rate Requirements and Related Regulations
- 52.222-14 Disputes Concerning Labor Standards
- 52.222-15 Certification of Eligibility
- 52.222-55 Minimum Wages for Contractor Workers Under Executive Order 14026
- 52.222-62 Paid Sick Leave Under Executive Order 13706

3.02 WORK PERFORMANCE (JUN 2012)

All work in performance of this Lease shall be done by skilled workers or mechanics and shall be acceptable to the LCO. The LCO may reject the Lessor's workers 1) if such are unlicensed, unskilled, or otherwise incompetent, or 2) if such have demonstrated a history of either untimely or otherwise unacceptable performance in connection with work carried out in conjunction with either this contract or other government or private contracts.

3.03 EXISTING FIT-OUT, SALVAGED, OR REUSED BUILDING MATERIAL (OCT 2019)

A. Items and materials existing in the Premises, or to be removed from the Premises during the demolition phase, are eligible for reuse in the construction phase of the project. The reuse of items and materials is preferable to recycling them; however, items considered for reuse shall be in re-furnished condition and shall meet the quality standards set forth by the Government in this Lease. In the absence of definitive quality standards, the Lessor is responsible to confirm that the quality of the item(s) in question shall meet or exceed accepted industry or trade standards for first quality commercial grade applications.

B. Unless waived by the LCO, the Lessor shall submit a reuse plan for leases 10,000 RSF or greater. The Government will not pay for existing fixtures and other TIs accepted in place. However, the Government will reimburse the Lessor, as part of the TIA, the costs to repair or improve such fixtures or improvements identified on the reuse plan and approved by the LCO.

3.04 CONSTRUCTION WASTE MANAGEMENT (OCT 2021)

For leases 10,000 RSF or greater, the requirements below apply:

- A. Recycling construction waste is mandatory for initial space alterations for TIs and subsequent alterations under the Lease.
- B. **SUBMITTAL REQUIREMENT:** Prior to construction commencement, a proposed plan following industry standards to recycle construction waste. The construction waste management plan shall quantify material diversion goals and maximize the materials to be recycled and/or salvaged (at least 50 percent) from construction, demolition, and packaging debris. Where the small quantity of material, the extraordinarily complex nature of the waste disposal method, or prohibitive expense for recycling would represent a genuine hardship, the Government, upon written request of the Lessor and approval of the LCO, may permit alternative means of disposal.
- C. The Lessor shall recycle the following items during both the demolition and construction phases of the project, subject to economic evaluation and feasibility: Ceiling grid and tile, light fixtures, including proper disposal of any transformers, ballasts, and fluorescent light bulbs, duct work and HVAC equipment, wiring and electrical equipment, aluminum and/or steel doors and frames, hardware, drywall, steel studs, carpet, carpet backing, and carpet padding, wood, insulation, cardboard packaging, pallets, windows and glazing materials, all miscellaneous metals (as in steel support frames for filing equipment), and all other finish and construction materials.
- D. If any waste materials encountered during the demolition or construction phase are found to contain lead, asbestos, polychlorinated biphenyls (PCBs) (such as fluorescent lamp ballasts), or other harmful substances, they shall be handled and removed in accordance with Federal and state laws and requirements concerning hazardous waste.
- E. In addition to providing "one time" removal and recycling of large-scale demolition items such as carpeting or drywall, the Lessor shall provide continuous facilities for the recycling of incidental construction waste during the initial construction.

F. Construction materials recycling records shall be maintained by the Lessor and shall be accessible to the LCO. Records shall include materials recycled or land-filled, quantity, date, and identification of hazardous wastes.

3.05 WOOD PRODUCTS (OCT 2019)

A. Particle board, strawboard, and plywood materials used shall be free of formaldehyde or sufficiently aged prior to use such that indoor air levels in the finished leased space shall not exceed 0.016 parts per million (ppm) of formaldehyde.

B. All materials comprised of combustible substances, such as wood plywood and wood boards, shall be treated with fire retardant chemicals by a pressure impregnation process or other methods that treats the materials throughout as opposed to surface treatment.

C. For leases 10,000 RSF or greater, new installations of wood products shall not contain wood from endangered wood species, as listed by the Convention on International Trade in Endangered Species. The list of species can be found at [HTTP://WWW.WOOD-DATABASE.COM/WOOD-ARTICLES/RESTRICTED-AND-ENDANGERED-WOOD-SPECIES/](http://www.wood-database.com/wood-articles/restricted-and-endangered-wood-species/) or [HTTPS://WWW.FWS.GOV/INTERNATIONAL/PLANTS/CURRENT-CITES-LISTINGS-OF-TREE-SPECIES.HTML](https://www.fws.gov/international/plants/current-cites-listings-of-tree-species.html). In addition, the Lessor is encouraged to use independently certified forest products. For information on certification and certified wood products, refer to the Forest Stewardship Council United States ([HTTPS://US.FSC.ORG/EN-US](https://us.fsc.org/en-us)), or the Sustainable Forestry Initiative ([HTTP://WWW.SFIPROGRAM.ORG/](http://www.sfiprogram.org/)).

3.06 ADHESIVES AND SEALANTS (OCT 2019)

A. All adhesives employed (including, but not limited to, adhesives for carpet, carpet tile, plastic laminate, wall coverings, adhesives for wood, or sealants) shall meet the requirements of the manufacturer of the products adhered or involved. The Lessor shall use adhesives and sealants with no heavy metals, and that do not result in indoor air levels above 0.016 parts per million (ppm) of formaldehyde. Adhesives and other materials used for the installation of carpets shall be limited to those having a flash point of 140 degrees F or higher.

B. For leases 10,000 RSF or greater, the Lessor is encouraged to use applicable environmentally preferable criteria that are recommended in the Green Procurement Compilation at [HTTPS://SFTOOL.GOV/GREENPROCUREMENT](https://sftool.gov/greenprocurement) and <https://sftool.gov/greenprocurement/green-products/8/miscellaneous/1238/adhesives/0>.

3.07 BUILDING SHELL REQUIREMENTS (OCT 2016)

A. The Building Shell shall be designed, constructed, and maintained in accordance with the standards set forth herein and completed prior to acceptance of Space. For pricing, fulfillment of all requirements not specifically designated as TIs, Building Specific Amortized Capital, Operating Costs, or other rent components as indicated shall be deemed included in the Shell Rent.

B. Base structure and Building enclosure components shall be complete. All common areas accessible by the Government, such as lobbies, fire egress corridors and stairwells, elevators, garages, and service areas, shall be complete. Restrooms shall be complete and operational. All newly installed Building shell components, including but not limited to, heating, ventilation, and air conditioning (HVAC), electrical, ceilings, sprinklers, etc., shall be furnished, installed, and coordinated with TIs. Circulation corridors are provided as part of the base Building only on multi-tenanted floors where the corridor is common to more than one tenant. On single tenant floors, only the fire egress corridor(s) necessary to meet code is provided as part of the shell.

C. The Building Shell rental rate shall also include, but is not limited to, costs included listed under Section II of GSA Form 1217, Lessor's Annual Cost Statement, including insurance, taxes, lease commission and management, in addition to profit, reserve costs and loan financing for the Building.

3.08 RESPONSIBILITY OF THE LESSOR AND LESSOR'S ARCHITECT/ENGINEER (JUN 2012)

A. The Lessor shall be responsible for the professional quality, technical accuracy, and the coordination of all designs, drawings, specifications, and other services furnished by the Lessor under this contract. The Lessor shall, without additional compensation, correct or revise any errors or deficiencies in its designs, drawings, specifications, or other services.

B. THE LESSOR REMAINS SOLELY RESPONSIBLE FOR DESIGNING, CONSTRUCTING, OPERATING, AND MAINTAINING THE LEASED PREMISES IN FULL ACCORDANCE WITH THE REQUIREMENTS OF THE LEASE. The Government retains the right to review and approve many aspects of the Lessor's design, including without limitation, review of the Lessor's design and construction drawings, shop drawings, product data, finish samples, and completed base building and TI construction. Such review and approval is intended to identify potential design flaws, to minimize costly misdirection of effort, and to assist the Lessor in its effort to monitor whether such design and construction comply with applicable laws and satisfy all Lease requirements.

C. Neither the Government's review, approval or acceptance of, nor payment through rent of the services required under this contract, shall be construed to operate as a waiver of any rights under this contract or of any cause of action arising out of the performance of this contract, and the Lessor shall be and remain liable to the Government in accordance with applicable law for all damages to the Government caused by the Lessor's negligent performance of any of the services required under this Lease.

D. Design and construction and performance information is contained throughout several of the documents which comprise this Lease. The Lessor shall provide to space planners, architects, engineers, construction contractors, etc., all information required whether it is found in this Lease, special requirements and attachments, price lists, or design intent drawings. Reliance upon one of these documents to the exclusion of any other may result in an incomplete understanding of the scope of the work to be performed and/or services to be provided.

3.09 QUALITY AND APPEARANCE OF BUILDING (JUN 2012)

The Building in which the Premises are located shall be designed, built and maintained in good condition and in accordance with the Lease requirements. If not new or recent construction, the Building shall have undergone by occupancy, modernization, or adaptive reuse for office space with modern conveniences. The Building shall be compatible with its surroundings. Overall, the Building shall project a professional and aesthetically pleasing appearance including an attractive front and entrance way.

3.10 VESTIBULES (OCT 2020)

- A. Vestibules shall be provided at public entrances wherever entry to the Space is directly from the outside. In the event of negative air pressure conditions, provisions shall be made for equalizing air pressure. For measurement purposes, vestibules are considered building support space and not ABOA.
- B. The Lessor shall provide permanent entryway systems (such as grilles or grates) to control dirt and particulates from entering the Building at all primary exterior entryways.

3.11 MEANS OF EGRESS (MAY 2015)

- A. Prior to occupancy, the Premises and any parking garage areas shall meet or will be upgraded to meet, either the applicable egress requirements in the National Fire Protection Association, Life Safety Code (NFPA 101), or the International Code Council, International Building Code (IBC), each current as of the Lease Award Date, or use an alternative approach or method that achieves an equivalent level of safety deemed acceptable by the Government.
- B. The Space shall have unrestricted access to a minimum of two remote exits on each floor of Government occupancy.
- C. Interlocking or scissor stairs located on the floor(s) where Space is located shall only count as one exit stair.
- D. A fire escape located on the floor(s) where Space is located shall not be counted as an approved exit stair.
- E. Doors shall not be locked in the direction of egress unless equipped with special locking hardware in accordance with requirements of NFPA 101 or the IBC.

3.12 AUTOMATIC FIRE SPRINKLER SYSTEM (SEP 2013)

- A. Any portion of the Space located below-grade, including parking garage areas, and all areas in a Building referred to as "hazardous areas" (defined in National Fire Protection Association (NFPA) 101) that are located within the entire Building (including non-Government areas) shall be protected by an automatic fire sprinkler system or an equivalent level of safety.
- B. For Buildings in which any portion of the Space is on or above the sixth floor, then, at a minimum, the Building up to and including the highest floor of Government occupancy shall be protected by an automatic fire sprinkler system or an equivalent level of safety.
- C. For Buildings in which any portion of the Space is on or above the sixth floor, and lease of the Space will result, either individually or in combination with other Government Leases in the Building, in the Government leasing 35,000 or more ANSI/BOMA Office Area SF of Space in the Building, then the entire Building shall be protected throughout by an automatic fire sprinkler system or an equivalent level of safety.
- D. Warehouse Space Only: The entire warehouse building shall be protected throughout by an automatic fire sprinkler system(s) when the offered space exceeds 10,000 rentable square feet in area.
- E. Automatic fire sprinkler system(s) shall be installed in accordance with the requirements of NFPA 13, Standard for the Installation of Sprinkler Systems that was in effect on the actual date of installation.
- F. Automatic fire sprinkler system(s) shall be maintained in accordance with the requirements of NFPA 25, Standard for the Inspection, Testing, and Maintenance of Water-based Fire Protection Systems (current as of the Lease Award Date).
- G. "Equivalent level of safety" means an alternative design or system (which may include automatic fire sprinkler systems), based upon fire protection engineering analysis, which achieves a level of safety equal to or greater than that provided by automatic fire sprinkler systems.

3.13 FIRE ALARM SYSTEM (SEP 2013)

- A. A Building-wide fire alarm system shall be installed in the entire Building in which any portion of the Space is located on the 3rd floor or higher.
- B. A Building-wide fire alarm system shall be installed when the offered Space exceeds 30,000 square feet of RSF.
- C. The fire alarm system shall be installed in accordance with the requirements of NFPA 72, National Fire Alarm and Signaling Code, that was in effect on the actual date of installation.
- D. The fire alarm system shall be maintained in accordance with the requirements of NFPA 72, National Fire Alarm and Signaling Code (current as of the Lease Award Date).
- E. The fire alarm system shall transmit all fire alarm signals to the local fire department via any of the following means: directly to the local fire department, to the (911) public communications center, to a central station, to a remote supervising station, or to a proprietary supervising station.
- F. If the Building's fire alarm control unit is over 25 years old as of the date of award of this Lease, Lessor shall install a new fire alarm system in accordance with the requirements of NFPA 72, National Fire Alarm and Signaling Code (current as of the Lease Award Date), prior to Government acceptance and occupancy of the Space.

3.14 ENERGY INDEPENDENCE AND SECURITY ACT (MAR 2016)

A. Energy-related Requirements:

1. The Energy Independence and Security Act (EISA) establishes the following requirements for Government Leases in Buildings that have not earned the ENERGY STAR® Label conferred by the Environmental Protection Agency (EPA) within one year prior to the due date for final proposal revisions ("most recent year").

2. If this Lease was awarded under any of EISA's Section 435 statutory exceptions, the Lessor shall either:

a. Earn the ENERGY STAR® Label prior to acceptance of the Space (or not later than one year after the Lease Award Date of a succeeding or superseding Lease); or

b. (i) Complete energy efficiency and conservation improvements if any, agreed to by Lessor in lieu of earning the ENERGY STAR® Label prior to acceptance of the Space (or not later than one year after the Lease Award Date of a succeeding or superseding Lease); and

(ii) Obtain and publicly disclose the Building's current ENERGY STAR® score (using EPA's Portfolio Manager tool), unless the Lessor cannot access whole building utility consumption data, or there is no building category within Portfolio Manager to benchmark against, including spaces—

- I. That are located in States with privacy laws that provide that utilities shall not provide such aggregated information to multitenant building owners; and
- II. For which tenants do not provide energy consumption information to the commercial building owner in response to a request from the building owner. (A Federal agency that is a tenant of the space shall provide to the building owner, or authorize the owner to obtain from the utility, the energy consumption information of the space for the benchmarking and disclosure required by this subparagraph D).
- III. That cannot be benchmarked (scored) using EPA's Portfolio Manager tool because of excessive vacancy; in which case Lessor agrees to obtain the score and publicly disclose it within 120 days of the eligibility to obtain a score using the EPA Portfolio Manager tool.

Note: "public disclosure" means posting the Energy Star® score on state or local websites in those areas that have applicable disclosure mandates and reporting the score to the Government via Portfolio Manager. In the absence of an applicable state or local disclosure mandate, Lessor shall either generate and display the Energy Star® score in a public space at the building location or post the score on Lessor's or Lessor's Parent/Affiliate website.

3. If this Lease was awarded to a Building to be built or to a Building predominantly vacant as of the due date for final proposal revisions and was unable to earn the ENERGY STAR® label for the most recent year (as defined above) due to insufficient occupancy but was able to demonstrate sufficient evidence of capability to earn the ENERGY STAR® label, then Lessor must earn the ENERGY STAR® label within 18 months after occupancy by the Government.

4. The Lessor is encouraged to purchase at least 50 percent of the Government tenant's electricity from renewable sources.

B. Hydrology-related Requirements:

1. Per EISA Section 438, the sponsor of any development or redevelopment project involving a Federal facility with a footprint that exceeds 5,000 square feet shall use site planning, design, construction, and maintenance strategies for the property to maintain or restore, to the maximum extent technically feasible, the predevelopment hydrology of the Property with regard to the temperature, rate, volume, and duration of flow. If the Lessor proposes to satisfy the Government's space requirements through a development or redevelopment project, and the Government will be the sole or predominant tenant such that any other use of the Property will be functionally or quantitatively incidental to the Government's use, the Lessor is required to implement hydrology maintenance and restoration requirements as required by EISA Section 438.

a. For the purposes of applying EISA Section 438 in this Lease, "sponsor" shall mean "Lessor", and "exceeds 5,000 square feet" shall mean construction that disturbs 5,000 square feet or more of land area at the Property or on adjoining property to accommodate the Government's requirements, or at the Property for whatever reason. Information regarding implementation of the hydrology maintenance and restoration requirements can be found at: <http://www.epa.gov/greeningepa/technical-guidance-implementing-stormwater-runoff-requirements-federal-projects>

b. Lessor is required to implement these hydrology maintenance and restoration requirements to the maximum extent technically feasible, prior to acceptance of the Space, (or not later than one year after the Lease Award Date or Lease Term Commencement Date, whichever is later, of a succeeding or superseding Lease). Additionally, this Lease requires EISA Section 438 storm water compliance not later than one year from the date of any applicable disturbance (as defined in EISA Section 438) of more than 5,000 square feet of ground area if such disturbance occurs during the term of the Lease if the Government is the sole or predominant tenant. In the event the Lessor is required to comply with EISA Section 438, Lessor shall furnish the Government, prior to the filing for permits for the associated work, with a certification from Lessor's engineer that the design meets the hydrology maintenance and restoration requirements of EISA Section 438.

3.15 ELEVATORS (OCT 2020)

A. The Lessor shall provide suitable passenger elevator and, when required by the Government, freight elevator service to any of the Premises not having ground level access. Service shall be available during the normal hours of operation specified in the in this Lease. However, one passenger elevator and, when required by the Government, one freight elevator shall be available at all times for Government use. When a freight elevator is required by the Government, it shall be accessible to the loading areas. When possible, the Government shall be given 24-hour advance notice if the service is to be interrupted for more than 1-1/2 hours. Normal service interruption shall be scheduled outside of the Government's normal working hours. The Lessor shall also use best efforts to minimize the frequency and duration of unscheduled interruptions.

B. Code: Elevators shall conform to the requirements of the American Society of Mechanical Engineers ASME A17.1/CSA B44, Safety Code for Elevators and Escalators that were in effect based on the elevator installation date, code year. Elevators shall be provided with Phase I emergency recall operation and Phase II emergency in-car operation in accordance with ASME A17.1/CSA B44. Fire alarm initiating devices (e.g., smoke detectors) used to initiate Phase I

emergency recall operation shall be installed in accordance with the requirements of NFPA 72, National Fire Alarm and Signaling Code. The elevators shall be inspected and maintained in accordance with the current edition of the ASME A17.2, Inspector's Manual for Elevators. Except for the reference to ASME A17.1 in ABAAS, Section F105.2.2, all elevators must meet ABAAS requirements for accessibility in Sections 407, 408, and 409 of ABAAS.

C. Safety Systems: Elevators shall be equipped with telephones or other two-way emergency communication systems. The system used shall be marked and shall reach an emergency communication location staffed 24 hours per day, 7 days per week.

D. Speed: The passenger elevators shall have a capacity to transport in 5 minutes 15 percent of the normal population of all upper floors (based on 150 SF per person). Further, the dispatch interval between elevators during the up-peak demand period shall not exceed 35 seconds.

E. Interior Finishes: Elevator cab walls shall be hardwood, marble, granite, or an equivalent pre-approved by the LCO. Elevator cab floors shall be marble, granite, terrazzo, or an equivalent pre-approved by the LCO.

3.16 BUILDING DIRECTORY (OCT 2021)

A directory listing the Government agency shall be provided in the Building lobby. The directory must be acceptable to the LCO.

3.17 FLAGPOLE (SEP 2013)

If the Government is the sole occupant of the Building, a flagpole shall be provided at a location to be approved by the LCO. The flag of the United States of America will be provided by the Lessor, as part of shell rent, and replaced at all times during the Lease term when showing signs of wear.

3.18 DEMOLITION (JUN 2012)

The Lessor shall remove existing abandoned electric, telephone, and data cabling and devices, as well as any other improvements or fixtures in place to accommodate the Government's requirements. Any demolition of existing improvements that is necessary to satisfy the Government's layout shall be done at the Lessor's expense.

3.19 ACCESSIBILITY (FEB 2007)

The Building, leased Space, and areas serving the leased Space shall be accessible to persons with disabilities in accordance with the Architectural Barriers Act Accessibility Standard (ABAAS), Appendices C and D to 36 CFR Part 1191 (ABA Chapters 1 and 2, and Chapters 3 through 10). To the extent the standard referenced in the preceding sentence conflicts with local accessibility requirements, the more stringent shall apply.

3.20 CEILINGS (OCT 2019) THIS PARAGRAPH APPLIES TO THE OFFICE SPACE ONLY

A complete acoustical ceiling system (which includes grid and lay-in tiles, or other Building standard ceiling system as approved by the LCO) throughout the Space and Premises shall be required. The acoustical ceiling system shall be furnished, installed, and coordinated with TIs.

A. Ceilings shall be at a minimum 9 feet and 0 inches and no more than 12 feet and 0 inches measured from floor to the lowest obstruction. Areas with raised flooring shall maintain these ceiling-height limitations above the finished raised flooring. Bulkheads and hanging or surface mounted light fixtures which impede traffic ways shall be avoided. Ceilings shall be uniform in color and appearance throughout the Space, with no obvious damage to tiles or grid.

B. Prior to closing the ceiling, the Lessor shall coordinate with the Government for the installation of any items above the ceiling.

C. Should the ceiling be installed in the Space prior to construction of the TIs, then the Lessor shall be responsible for all costs in regard to the disassembly, storage during construction, and subsequent re-assembly of any of the ceiling components which may be required to complete the TIs. The Lessor shall also bear the risk for any damage to the ceiling or any components thereof during the construction of the TIs.

D. Ceilings shall be a flat plane in each room and shall be suspended and finished as follows unless an alternate equivalent is pre-approved by the LCO:

1. Restrooms. Plastered or spackled and taped gypsum board.
2. Offices and conference rooms. Mineral and acoustical tile or lay in panels with textured or patterned surface and tegular edges or an equivalent pre-approved by the LCO. For leases 10,000 RSF or greater, newly installed tiles or panels shall meet applicable, statutory environmentally preferable criteria related to biobased content as outlined under the Green Procurement Compilation at <https://sftool.gov/greenprocurement> and <https://sftool.gov/greenprocurement/green-products/3/building-finishes/1732/acoustical-ceiling-tiles/0?addon=False>.
3. Corridors and eating/galley areas. Plastered or spackled and taped gypsum board or mineral acoustical tile.

3.21 EXTERIOR AND COMMON AREA DOORS AND HARDWARE (SEP 2013)

A. Exterior Building doors and doors necessary to the lobbies, common areas, and core areas shall be required. This does not include suite entry or interior doors specific to TIs.

B. Exterior doors shall be weather tight and shall open outward. Hinges, pivots, and pins shall be installed in a manner which prevents removal when the door is closed and locked. These doors shall have a minimum clear opening of 32" clear wide x 80" high (per leaf). Doors shall be heavy duty, flush, (1) hollow steel construction, (2) solid core wood, or (3) insulated tempered glass. As a minimum requirement, hollow steel doors shall be fully insulated, flush, #16-gauge hollow steel. Solid-core wood doors and hollow steel doors shall be at least 1-3/4 inches thick. Door assemblies shall be of durable finish and shall have an aesthetically pleasing appearance acceptable to the LCO. The opening dimensions and door shall conform to the governing building, fire safety,

accessibility, and energy codes and/or requirements. Fire door assemblies shall be listed and labeled. Labels on fire door assemblies shall be maintained in a legible condition. Fire door assemblies and their accompanying hardware, including frames and closing devices shall be installed in accordance with the requirements of NFPA 80, Standard for Fire Doors and Other Opening Protectives.

C. Exterior doors and all common area doors shall have door handles or door pulls with heavyweight hinges. All doors shall have corresponding doorstops (wall or floor mounted) and silencers. All public use doors and restroom doors shall be equipped with kick plates. All doors shall have automatic door closers. All Building exterior doors shall have locking devices installed to reasonably deter unauthorized entry.

3.22 DOORS: IDENTIFICATION (APR 2011)

All signage required in common areas unrelated to tenant identification shall be provided and installed by the Lessor.

3.23 WINDOWS (OCT 2020)

- A. Office Space shall have windows in each exterior bay unless waived by the LCO.
- B. All exterior window assemblies shall be weather resistant and watertight. Operable windows that open shall be equipped with secure latches. Off-street, ground-level windows and those accessible from adjacent roofs and other structures that can be opened must be fitted with a secure latch. Windows intended for use as a secondary means of egress must be openable from the egress side (e.g., inside) of the Building without the use of a key, tool, or special knowledge or effort for operation from the egress side.

3.24 PARTITIONS: GENERAL (OCT 2019)

- A. Partitions in public areas shall be marble, granite, hardwood, or drywall covered with durable wall covering or high-performance coating, or equivalent pre-approved by the LCO.
- B. For leases 10,000 RSF or greater where the Government is a sole tenant of the Building, the Lessor is encouraged to use materials for newly installed gypsum board meeting applicable environmentally preferable criteria that are recommended in the Green Procurement Compilation at [HTTPS://SFTOOL.GOV/GREENPROCUREMENT](https://sftool.gov/greenprocurement) and <https://sftool.gov/greenprocurement/green-products/3/building-finishes/1735/wallboardgypsum-boarddrywall/0?addon=False>.

3.25 PARTITIONS: PERMANENT (OCT 2019)

- A. Permanent partitions shall extend from the structural floor slab to the structural ceiling slab. They shall be provided by the Lessor as part of shell rent as necessary to surround the Space, stairs, corridors, elevator shafts, restrooms, all columns, and janitor closets. They shall have a flame spread rating of 25 or less and a smoke development rating of 450 or less (ASTM E-84). Stairs, elevators, and other floor openings shall be enclosed by partitions and shall have the fire resistance required by the applicable building code, fire code and ordinances adopted by the jurisdiction in which the Building is located (such as the International Building Code, etc.) current as of the Lease Award Date.
- B. For leases 10,000 RSF or greater where the Government is a sole tenant of the Building, the Lessor is encouraged to use materials for newly installed gypsum board meeting the applicable environmentally preferable criteria that are recommended in the Green Procurement Compilation at [HTTPS://SFTOOL.GOV/GREENPROCUREMENT](https://sftool.gov/greenprocurement) and <https://sftool.gov/greenprocurement/green-products/3/building-finishes/1735/wallboardgypsum-boarddrywall/0?addon=False>.

3.26 INSULATION: THERMAL, ACOUSTIC, AND HVAC (OCT 2019)

- A. No insulation installed with this project shall be material manufactured using chlorofluorocarbons (CFCs), nor shall CFCs be used in the installation of the product.
- B. All insulation containing fibrous materials exposed to air flow shall be rated for that exposure or shall be encapsulated.
- C. Insulating properties for all materials shall meet or exceed applicable industry standards. Polystyrene products shall meet American Society for Testing and Materials (ASTM) C578 91.
- D. All insulation shall contain low emitting volatiles and not result in indoor air levels above 0.016 parts per million (ppm) of formaldehyde.
- E. The maximum flame spread, and smoke developed index for insulation shall meet the requirements of the applicable local codes and ordinances (current as of the Lease Award Date) adopted by the jurisdiction in which the Building is located.
- F. For leases 10,000 RSF or greater, all insulation products shall meet applicable, statutory environmentally preferable criteria related to recovered material content as outlined in the Green Procurement Compilation at [HTTPS://SFTOOL.GOV/GREENPROCUREMENT](https://sftool.gov/greenprocurement) and <https://sftool.gov/greenprocurement/green-products/1/construction-materials/22/building-insulation/0>.

3.27 WALL FINISHES – SHELL (SEP 2015)

- A. All restrooms within the Building common areas of Government-occupied floors shall have 1) ceramic tile, recycled glass tile, or comparable wainscot from the finished floor to a minimum height of 4'-6" and 2) semigloss paint on remaining wall areas, or other finish approved by the Government.
- B. All elevator areas that access the Space and hallways accessing the Space shall be covered with wall coverings not less than 20 ounces per square yard, high performance paint, or an equivalent.

3.28 PAINTING – SHELL (OCT 2019)

A. The Lessor shall bear the expense for all painting associated with the Building shell. These areas shall include all common areas. Exterior perimeter walls and interior core walls within the Space shall be spackled and prime painted. If any Building shell areas are already painted prior to TIs, then the Lessor shall repaint, at the Lessor's expense, as necessary during TIs.

B. The costs for cyclical painting requirements as outlined in Section 6 shall be included in the shell rent.

C. For leases 10,000 RSF or greater, primer shall meet applicable, statutory environmentally preferable criteria related to biobased and recovered material content as outlined in the Green Procurement Compilation at <HTTPS://SFTOOL.GOV/GREENPROCUREMENT> and <https://sftool.gov/greenprocurement/green-products/3/building-finishes/1338/paint/0?addon=False>.

3.29 FLOORS AND FLOOR LOAD (OCT 2019) THIS PARAGRAPH APPLIES TO THE OFFICE SPACE ONLY

A. All adjoining floor areas shall be of a common level not varying more than 1/4 inch over a 10-foot horizontal run-in accordance with the American Concrete Institute standards, non-slip, and acceptable to the LCO.

B. Under-floor surfaces shall be smooth and level. Office areas shall have a minimum live load capacity of 50 pounds per ABOA SF plus 20 pounds per ABOA SF for moveable partitions. Storage areas shall have a minimum live load capacity of 100 pounds per ABOA SF, including moveable partitions. Government shall provide Lessor with loading requirements for Government provided and installed High Density Storage Systems. Lessor may be required to provide a report by a registered structural engineer showing the floor load capacity, at the Lessor's expense. Calculations and structural drawings may also be required.

3.30 FLOORS AND FLOOR LOAD (OCT 2019) – THIS PARAGRAPH APPLIES TO THE WAREHOUSE SPACE ONLY

A. All adjoining floor areas shall be of a common level, and meet ASTM Standard E1155, with a minimum levelness of **Ff35** and **FL25**. Warehouse areas shall have a minimum live load capacity of [e.g., 350] pounds per square foot. The Government may require Lessor to provide written certification of the floor load capacity, at no cost to the Government, by a registered Professional Engineer. The Government may also require calculations and structural drawings at no cost to the Government, by a registered Professional Engineer.

B. Warehouse floor surfacing shall have the appropriate surface performance for the operations being performed as outlined in the following table and as verified with in situ testing. The appropriate surface performance shall be maintained throughout the life of the lease term. Periodic in situ testing shall be performed at a frequency appropriate for the expected useful life of the floor attribute required to be maintained:

	DUTY	APPLICATION	PERFORMANCE
3. Class 3	light abrasion— rubber tire and foot traffic	Light duty	Dust free finish

- b. Floor Hardeners, or coatings shall be utilized to achieve the wear performance for the appropriate duty class required in the above table. Coatings, such as polyurethanes membranes are only acceptable for class 3. Should hardeners be required then nano-lithium silicates or other environmentally friendly practices must be employed.
- c. In situ abrasion resistance required of class 2 or 3 shall be determined in accordance with BS EN 13892-4: 2002

3.31 FLOOR COVERING AND PERIMETERS – SHELL (SEP 2013)

A. Exposed interior floors in primary entrances and lobbies shall be ceramic tile or other hard surface approved by the Government. Exposed interior floors in secondary entrances, elevator lobbies, and primary interior corridors shall be high-grade carpet, marble, granite, or terrazzo. Resilient flooring shall be used in telecommunications rooms. Floor perimeters at partitions shall have wood, rubber, vinyl, marble, or carpet base.

B. Terrazzo, unglazed ceramic tile, recycled glass tile, and/or quarry tile shall be used in all restroom and service areas of Government-occupied floors.

C. Any alternate flooring must be pre-approved by the LCO.

D. The costs for cyclical carpet replacement requirements as outlined in Section 6 shall be included in the shell rent.

3.32 MECHANICAL, ELECTRICAL, PLUMBING: GENERAL (APR 2011)

The Lessor shall provide and operate all Building equipment and systems in accordance with applicable technical publications, manuals, and standard procedures. Mains, lines, and meters for utilities shall be provided by the Lessor. Exposed ducts, piping, and conduits are not permitted in office Space.

3.33 BUILDING SYSTEMS (APR 2011)

Whenever requested, the Lessor shall furnish to GSA as part of shell rent, a report by a registered professional engineer(s) showing that the Building and its systems as designed and constructed will satisfy the requirements of this Lease.

3.34 ELECTRICAL (OCT 2019)

A. The Lessor shall be responsible for meeting the applicable requirements of local codes and ordinances. When codes conflict, the more stringent standard shall apply. Main service facilities shall be enclosed. The enclosure may not be used for storage or other purposes and shall have door(s) fitted with an automatic deadlocking latch bolt with a minimum throw of 1/2 inch. Main distribution for standard office occupancy shall be provided at the Lessor's expense. The electrical

distribution panels enclosed in the electrical room shall include single-phase 120/240 volt or 3-phase 120/208 volt service for leased spaces under 10,000 RSF; 3-phase 120/208 volt service for leased spaces between 10,000 and 25,000 RSF; and 3-phase 277/480 volt and 3-phase 120/208 volt service for leased spaces over 25,000 RSF. In no event shall such power distribution (not including lighting and HVAC) for the Space fall below 4 watts per ABOA SF.

B. Warehouse Space Only: A minimum of **150** amps at 120/240 volts per **4,000** rentable square feet of leased Space inclusive of lighting circuits (but assuming no air conditioning mechanical load) shall be provided to circuit breaker panel boxes. Lessor must provide one watt per ABOA SF for electrical power distribution for warehouse areas.

C. Main power distribution switchboards and distribution and lighting panel boards shall be circuit breaker type with copper buses that are properly rated to provide the calculated fault circuits. All power distribution panel boards shall be supplied with separate equipment ground buses. All power distribution equipment shall be required to handle the actual specified and projected loads and 10 percent spare load capacity. Distribution panels are required to accommodate circuit breakers for the actual calculated needs and 10 percent spare circuits that will be equivalent to the majority of other circuit breakers in the panel system. Fuses and circuit breakers shall be plainly marked or labeled to identify circuits or equipment supplied through them.

D. Convenience outlets shall be installed in accordance with NFPA Standard 70, National Electrical Code, or local code, whichever is more stringent. The Lessor shall provide duplex utility outlets in restrooms, corridors, and dispensing areas.

3.35 ADDITIONAL ELECTRICAL CONTROLS (JUN 2012)

If the Government pays separately for electricity, no more than 500 SF of office Space may be controlled by one switch or automatic light control for all office Space on the Government meter, whether through a building automation system, time clock, occupant sensor, or other comparable system acceptable to the LCO.

3.36 PLUMBING (JUN 2012)

The Lessor shall include the cost of plumbing in common areas. Hot and cold-water risers and domestic waste and vent risers, installed and ready for connections that are required for TIs, shall be included in the shell rent.

3.37 DRINKING FOUNTAINS (OCT 2018)

On each floor of Government-occupied Space, the Lessor shall provide a minimum of two drinking fountains with chilled potable water within 200 feet of travel from any Government-occupied area on the floor. The fountains shall comply with Section F211 of the Architectural Barriers Act Accessibility Standard. Potable is defined as water meeting current EPA primary drinking water standards or more stringent, applicable state or local regulations. The Lessor shall serve as first responder to any occupant complaints about drinking water. The Lessor shall promptly investigate any such complaints and implement the necessary controls to address the complaints and maintain potable water conditions.

3.38 RESTROOMS (OCT 2021)

A. If this Lease is satisfied by new construction or by renovations that include the construction of restrooms, Lessor shall provide water closets, sinks and urinals on each floor that is partially or fully occupied by the government per the schedule below. The schedule is per floor and based on a density of one person for each 135 ABOA SF of office Space, allocated as 50% women and 50% men. If future renovations requiring restroom construction occur during the term of this Lease, the number of fixtures then must meet the schedule as part of the major alterations.

ESTIMATED NUMBER OF EACH GENDER PER FLOOR			(WOMEN'S) WATER CLOSETS	(WOMEN'S) SINKS	(MEN'S) WATER CLOSETS	(MEN'S) URINALS	(MEN'S) SINKS
1	to	8	2	1	1	1	1
9	to	24	3	2	2	1	1
25	to	36	3	2	2	1	2
37	to	56	5	3	3	2	2
57	to	75	6	4	4	2	2
76	to	96	6	5	4	2	3
97	to	119	7	5	5	2	3
120	to	134	9	5	6	3	4
Above 135			3/40	1/24	1/20	1/40	1/30

B. If no new construction of a restroom is occurring, at a minimum, separate restroom facilities for men and women shall be provided with sufficient fixtures (water closets, sinks and urinals), in accordance with local code or ordinances.

C. Each restroom shall have water closets enclosed with modern stall partitions and doors, urinals (in men's room), and hot (set in accordance with applicable building codes) and cold water. Water closets and urinals shall not be visible when the exterior door is open. These facilities shall be located on each floor occupied by the Government in the Building and shall be located so that employees will not be required to travel more than 200 feet on one floor to reach the restrooms.

D. Restrooms must meet ABAAS requirements as stated under this Lease.

E. Each main restroom shall contain the following:

1. A mirror and shelf above the lavatory.
2. A toilet paper dispenser in each water closet stall that will hold at least two standard-size rolls and allow easy, unrestricted dispensing.

3. A coat hook on the inside face of the door to each water closet stall and on several wall locations by the lavatories.
4. At least one modern paper towel dispenser, soap dispenser, and waste receptacle for every two lavatories.
5. A coin-operated sanitary napkin dispenser in women's restrooms with a waste receptacle in each water closet stall.
6. A disposable toilet seat cover dispenser.
7. A counter area of at least 2 feet, 0 inches in length, exclusive of the lavatories (however, it may be attached to the lavatories) with a mirror above and a ground-fault interrupter-type convenience outlet located adjacent to the counter area. The counter should be installed to minimize pooling or spilling of water at the front edge.
8. A floor drain.
9. Newly installed restroom partitions shall be made from recovered materials as listed in EPA's CPG.

3.39 PLUMBING FIXTURES: WATER CONSERVATION (OCT 2019)

For leases 10,000 RSF or greater, the specifications listed below apply:

1. New installations of plumbing fixtures,
 2. Replacement of existing plumbing fixtures, or
 3. Existing non-conforming fixtures where the Government occupies the full floor.
- A. Water closets must conform to EPA WaterSense or fixtures with equivalent flush volumes must be utilized.
- B. Urinals must conform to EPA WaterSense or fixtures with equivalent flush volumes must be utilized. Waterless urinals are not acceptable.
- C. Faucets must conform to EPA WaterSense or fixtures with equivalent flow rates must be utilized.

Information on EPA WaterSense fixtures can be found at [HTTP://WWW.EPA.GOV/WATERSENSE/](http://www.epa.gov/watersense/).

3.40 JANITOR CLOSETS (SEP 2015)

Janitor closets shall meet all local codes and ordinances. When not addressed by local code, Lessor shall provide containment drains plumbed for appropriate disposal of liquid wastes in spaces where water and chemical concentrate mixing occurs for maintenance purposes. Disposal is not permitted in restrooms.

3.41 HEATING, VENTILATION, AND AIR CONDITIONING - SHELL (OCT 2021)

A. Warehouse Space Only: Temperature control for all warehouse areas shall be provided by ceiling mounted heating equipment capable of maintaining a minimum temperature of 55 degrees Fahrenheit (with all doors closed) throughout the warehouse area during the heating season regardless of the outside temperature. Unit heaters shall be controlled by individual thermostats mounted in the area of the unit heaters or controlled from a central master time clock of the 7-day type with a separate manual override switch (12 hours) or other automatic means to permit setback of temperature at night and on weekends. Thermostats shall be secured from manual operation by key or locked cage. A key shall be provided to the Government's designated representative. Central air rotation units will be acceptable if loading dock areas are equipped with unit heaters for direct heating over doors. In the warehouse area, unit heaters shall be mounted tight to the ceiling for maximum headroom. Open warehouse area will be cooled by evaporative coolers. Restrooms, showers, lab, radio workroom and workout room need to be heated and cooled by separate HVAC system. The Lessor shall provide conditioned air through medium pressure duct work at a rate of .75 cubic feet per minute per ABOA SF and systems shall be designed with sufficient systems capacity to meet all requirements in this Lease.

B. Office Space Only: Central HVAC systems shall be installed and operational, including, as appropriate, main and branch lines, VAV boxes, dampers, flex ducts, and diffusers, for an open office layout, including all Building common areas. The Lessor shall provide conditioned air through medium pressure duct work at a rate of .75 cubic feet per minute per ABOA SF and systems shall be designed with sufficient systems capacity to meet all requirements in this Lease.

C. Areas having excessive heat gain or heat loss or affected by solar radiation at different times of the day, shall be independently controlled.

D. Equipment Performance. Temperature control for office Spaces shall be provided by concealed central heating and air conditioning equipment. The equipment shall maintain Space temperature control over a range of internal load fluctuations of plus 0.5 W/SF to minus 1.5 W/SF from initial design requirements of the tenant.

E. Ductwork Re-use and Cleaning. Any ductwork to be reused and/or to remain in place shall be cleaned, tested, and demonstrated to be clean in accordance with the standards set forth by NADCA. The cleaning, testing, and demonstration shall occur immediately prior to Government occupancy to avoid contamination from construction dust and other airborne particulates.

F. During working hours in periods of heating and cooling, ventilation shall be provided in accordance with American National Standards Institute, American Society of Heating, Refrigeration and Air-Conditioning Engineers (ANSI/ASHRAE) Standard 62.1, Ventilation for Acceptable Indoor Air Quality that corresponds with how the HVAC system was designed to perform. At a minimum, Lessor must meet ASHRAE Standard 62.1-2004.

G. Heating and air-conditioning air distribution systems (air handling units, VAV boxes, fan coil units, etc.) for the Space shall be equipped with particulate matter air filters that meet the Minimum Efficiency Reporting Value (MERV) specified in the ANSI/ASHRAE Standard 62.1 version referenced in sub-paragraph E above. Locations that do not meet the EPA National Ambient Air Quality Standards (NAAQS) for particulates (PM 10 or PM 2.5) must be equipped with additional filtration on outdoor air intakes as required in ANSI/ASHRAE Standard 62.1. NAAQS information can be found at [HTTPS://WWW.EPA.GOV/GREEN-BOOK](https://www.epa.gov/green-book).

H. Restrooms shall be properly exhausted, with a minimum of 10 air changes per hour.

I. Where the Lessor proposes that the Government shall pay utilities, [redacted] following shall apply: [redacted]

1. An automatic air or water economizer cycle shall be provided to all air handling equipment, and
 2. The Building shall have a fully functional building automation system capable of control, regulation, and monitoring of all environmental conditioning equipment. The building automation system shall be fully supported by a service and maintenance contract.
- J. Warehouse and Office Spaces: HVAC systems must conform to the locally approved building code.

3.42 TELECOMMUNICATIONS: DISTRIBUTION AND EQUIPMENT (SEP 2015)

A. Sufficient space shall be provided on the floor(s) where the Government occupies Space for the purposes of terminating telecommunications service into the Building. The Building's telecommunications closets located on all floors shall be vertically stacked. Telecommunications switch rooms, wire closets, and related spaces shall be enclosed. The enclosure shall not be used for storage or other purposes and shall have door(s) fitted with an automatic door-closer and deadlocking latch bolt with a minimum throw of 1/2 inch. The telephone closets shall include a telephone backboard.

B. Telecommunications switch rooms, wire closets, and related spaces shall meet applicable Telecommunications Industry Association (TIA) and Electronic Industries Alliance (EIA) standards. These standards include the following:

1. TIA/EIA-568, Commercial Building Telecommunications Cabling Standard,
2. TIA/EIA 569, Commercial Building Standard for Telecommunications Pathways and Spaces,
3. TIA/EIA-570, Residential and Light Commercial Telecommunications Wiring Standard, and
4. TIA/EIA-607, Commercial Building Grounding and Bonding Requirements for Telecommunications Standard.

C. Telecommunications switch rooms, wire closets, and related spaces shall meet applicable NFPA standards. Bonding and grounding shall be in accordance with NFPA Standard 70, National Electrical Code, and other applicable NFPA standards and/or local code requirements.

3.43 TELECOMMUNICATIONS: LOCAL EXCHANGE ACCESS (JUN 2012)

A. The Government may elect to contract its own telecommunications (voice, data, video, Internet or other emerging technologies) service in the Space. The Government may contract with one or more parties to have INS wiring (or other transmission medium) and telecommunications equipment installed.

B. The Lessor shall allow the Government's designated telecommunications providers access to utilize existing Building wiring to connect its services to the Government's Space. If the existing Building wiring is insufficient to handle the transmission requirements of the Government's designated telecommunications providers, the Lessor shall provide access from the point of entry into the Building to the Government's floor Space, subject to any inherent limitations in the pathway involved.

C. The Lessor shall allow the Government's designated telecommunications providers to affix telecommunications antennas (high frequency, mobile, microwave, satellite, or other emerging technologies), subject to weight and wind load conditions, to roof, parapet, or Building envelope as required. Access from the antennas to the Premises shall be provided.

D. The Lessor shall allow the Government's designated telecommunications providers to affix antennas and transmission devices throughout the Space and in appropriate common areas frequented by the Government's employees to allow the use of cellular telephones and communications devices necessary to conduct business.

3.44 LIGHTING: INTERIOR AND PARKING - SHELL (OCT 2020)

Office Space Only:

NOTE: FOR PRICING ESTIMATING PURPOSES, FIXTURES WILL BE INSTALLED AT THE AVERAGE RATIO OF 1 FIXTURE PER 80 ABOA SF.

A. INTERIOR FIXTURES: High efficiency T-8, T-5, or LED light fixtures (and associated ballasts or drivers) shall be installed as either ceiling grid or pendant mounted for an open-office plan. Ceiling grid fixtures shall be either 2' wide by 4' long or 2' wide by 2' long. Lessor shall provide, as part of Shell Rent, a minimum overall lighting fixture efficiency of 85 percent. Lamps shall maintain a uniform color level throughout the lease term.

B. LIGHTING LEVELS: Fixtures shall have a minimum of two tubes and shall provide 50 foot-candles at desktop level (30" above finished floor) with a maximum uniformity ratio of 1.5:1. Lessor shall provide, as part of Shell Rent, 10 average foot-candles in all other Building areas within the Premises with a uniformity ratio of 4:1. Emergency egress lighting levels shall be provided in accordance with the local applicable building codes (but not less than 1 foot-candle) by either an onsite emergency generator or fixture mounted battery packs.

C. POWER DENSITY:

Existing Buildings: The maximum fixture power density shall not exceed 1.4 watts per ABOA SF.

New Construction: The maximum fixture power density shall not exceed 1.1 watts per ABOA SF.

D. DAYLIGHTING CONTROLS: If the Lease is more than 10,000 ABOA SF, the Lessor shall provide daylight dimming controls in atriums or within 15 feet of windows and skylights where daylight can contribute to energy savings. Daylight harvesting sensing and controls shall be either integral to the fixtures or ceiling mounted and shall maintain required lighting levels in workspaces.

E. **OCCUPANCY/VACANCY SENSORS:** The Lessor shall provide ceiling mount occupancy sensors, or vacancy sensors (preferred), or scheduling controls through the building automation system (BAS) throughout the Space in order to reduce the hours that the lights are on when a particular space is unoccupied. No more than 1,000 square feet shall be controlled by any one sensor. Occupancy sensors in enclosed rooms shall continue to operate after the BAS has shut down the building at the end of the workday.

Warehouse Space Only:

F. Lessor shall provide a minimum lighting level of 30 foot-candles, as measured 30 inches above the floor, in aisles and open storage areas in the warehouse Space with the storage racks full. No more than one-third (1/3) of the lights shall be controlled by any one (1) light switch. Three (3) way or four (4) way light switches are required so all lights will be controlled and shall be located next to each personnel door. Lessor must provide lighting that is equivalent to the energy efficiency requirements in any office areas. Lessor shall provide, as part of Shell Rent, 10 average foot-candles in all non-office areas within the Premises with a uniformity ratio of 4:1. Emergency egress lighting levels shall be provided as part of Shell Rent in accordance with the local applicable building codes (but not less than 1 foot-candle) by either an onsite emergency generator or fixture mounted battery packs.

G. **Occupancy Sensors:** The Lessor shall provide ceiling mount occupancy sensors (over aisles and open areas), or scheduling controls through a building automation system (BAS) throughout the storage portion of the Space in order to reduce the hours that the lights are on when a particular area is unoccupied. No more than 1,000 square feet shall be controlled by any one sensor. Occupancy sensors in enclosed rooms shall continue to operate after any BAS has shut down the building at the end of the workday.

H. **BUILDING PERIMETER:**

1. Exterior parking areas, vehicle driveways, pedestrian walks, and the Building perimeter lighting levels shall be designed per Illuminating Engineering Society (IES) standards. Provide 5 foot-candles for doorway areas, 3 foot-candles for transition areas and at least 1 foot-candle at the surface throughout the parking lot. Wareyards (storage yards) require a minimum lighting level of 5 foot-candles (at ground level). Parking lot fixtures shall provide a maximum to minimum uniformity ratio of 15:1 and a maximum to average uniformity ratio of 4:1.

2. If the leased space is 100 percent occupied by Government tenants, all exterior parking lot fixtures shall be "Dark Sky" compliant with no property line trespass.

I. **PARKING STRUCTURES:** The minimum illuminance level for parking structures is 5 foot-candles as measured on the floor with a uniformity ratio of 10:1.

J. **PARKING SENSORS:** If the leased space is 100 percent occupied by Government tenants, exterior parking area and parking structure lighting shall be sensor or BAS controlled in order that it may be programmed to produce reduced lighting levels during non-use. This non-use time period will normally be from 11:00 pm to 6:00 am.

K. **EXTERIOR POWER BACKUP:** Exterior egress, walkway, parking lot, and parking structure lighting must have emergency power backup to provide for safe evacuation of the Building.

L. **VIDEO SURVEILLANCE SYSTEM (VSS):** Lighting shall be provided in such a manner to adequately support VSS operations, and not limit or preclude adequate fields of view.

3.45 ACOUSTICAL REQUIREMENTS (JUN 2012)

A. **Reverberation Control.** Private office and conference rooms using suspended acoustical ceilings shall have a noise reduction coefficient (NRC) of not less than 0.65 in accordance with ASTM C-423. Open office using suspended acoustical ceilings shall have an NRC of not less than 0.75. Private offices, conference rooms, and open offices using acoustical cloud or acoustical wall panels with a minimum of 70% coverage shall have an NRC of not less than 0.85.

B. **Ambient Noise Control.** Ambient noise from mechanical equipment shall not exceed noise criteria curve (NC) 35 in accordance with the ASHRAE Handbook of Fundamentals in offices and conference rooms; NC 40 in corridors, cafeterias, lobbies, and restrooms; NC 50 in other spaces.

C. **Noise Isolation.** Rooms separated from adjacent spaces by ceiling high partitions (not including doors) shall not be less than the following noise isolation class (NIC) standards when tested in accordance with ASTM E-336:

Conference rooms: NIC 40
Offices: NIC 35

D. **Testing.** The LCO may require, at Lessor's expense, test reports by a qualified acoustical consultant showing that acoustical requirements have been met.

3.46 SECURITY FOR NEW CONSTRUCTION (OCT 2019)

The Lessor shall provide a written certification from a licensed professional engineer that the Building conforms to a minimum of:

A. Window glazing and façade protection level, with a performance condition appropriate to the identified Facility Security Level.

B. Setback distance, as specified in this Lease, from the face of the Building's exterior to the protected/defended perimeter (i.e., any potential point of explosion). This means the distance from the Building to the curb or other boundary protected by bollards, planters or other street furniture. Such potential points of explosion may be, but are not limited to, such areas that could be accessible by any motorized vehicle (i.e., street, alley, sidewalk, driveway, parking lot).

C. Lobbies, mailrooms, and loading docks shall not share a return-air system with the remaining areas of the Building. The Lessor shall provide lobby, mailroom, and loading dock ventilation systems' outside air intakes and exhausts with low leakage, fast acting, isolation dampers that can be closed to isolate their systems. Dedicated HVAC shall be required for mailrooms only when the Government specifically requires a centrally operated mailroom. On Buildings of more than four stories, air intakes shall be located on the fourth floor or higher. On Buildings of three stories or less, air intakes shall be located on the roof or as high as practical. Locating intakes high on a wall is preferred over a roof location.

3.47 SEISMIC SAFETY FOR NEW CONSTRUCTION (OCT 2020)

For leases requiring new construction, the space will not be considered substantially complete until the LCO receives the Seismic Form F, Certificate of Seismic Compliance – New Building. This form must be completed by the civil or structural engineer and certify that the building was designed and constructed in accordance with the appropriate local code.

3.48 FIRE PROTECTION FOR NEW CONSTRUCTION (APR 2015)

A. The new Building shall be protected throughout by an automatic fire sprinkler system designed in accordance with the National Fire Protection Association (NFPA) 13, *Installation of Sprinkler Systems* (current as of the Lease Award Date).

B. When an electric fire pump is provided to support the design of the fire sprinkler system, a secondary power source shall be provided to the fire pump by a standby emergency generator or another means acceptable to the Government.

C. The fire alarm system installed shall be an emergency voice/alarm communication system when any one of the following conditions exist:

1. The Building is 2 or more stories in height above the level of exit discharge.
2. The total calculated occupant load of the Building is 300 or more occupants.
3. The Building is subject to 100 or more occupants above or below the level of exit discharge.

The emergency voice/alarm communication system shall be designed and installed to meet the requirements of NFPA 72 (current as of the Lease Award Date).

3.49 GREEN BUILDING RATING CERTIFICATION FOR NEW CONSTRUCTION (OCT 2016) INTENTIONALLY DELETED

3.50 GREEN BUILDING RATING CERTIFICATION FOR TENANT INTERIORS (OCT 2016)

A. The tenant Space must meet the requirements of LEED®-ID+C--Leadership in Energy and Environmental Design for Interior Design and Construction at the Certified level, at a minimum. The Lessor, at the Lessor's expense, shall obtain certification from the USGBC (for LEED®) within 9 months of occupancy. For requirements to achieve certification, Lessor must refer to latest version at the time of submittal of the LEED®-ID+C Reference Guide (at [HTTP://WWW.USGBC.ORG/](http://www.usgbc.org/)). At completion of all documentation and receipt of final certification, the Lessor must provide the Government two electronic copies on compact disks of all documentation submitted to the USGBC. Acceptable file format is Adobe PDF copied to disk from the LEED®-Online workspace. In addition, the Lessor will provide the Government viewing access to the LEED®-Online workspace as applicable during design and through the term of the Lease.

B. Prior to the end of the first 9 months of occupancy, if the Lessor fails to achieve LEED® certification, the Government may assist the Lessor in implementing a corrective action program to achieve LEED® certification and deduct its costs (including administrative costs) from the rent.

C. Any Building shell modifications necessary for the Space to meet the requirements of LEED®-ID+C certification, shall be noted and incorporated into the construction documents and shall be included as part of the Building shell costs. The Lessor must coordinate TI and shell requirements as necessary to meet the certification.

3.51 INDOOR AIR QUALITY DURING CONSTRUCTION (OCT 2021)

A. The Lessor shall provide to the Government safety data sheets (SDS) or other appropriate documents upon request, but prior to installation or use for the following products, including but not limited to, adhesives, caulking, sealants, insulating materials, fireproofing or fire stopping materials, paints, carpets, floor and wall patching or leveling materials, lubricants, clear finishes for wood surfaces, janitorial cleaning products, and pest control products.

B. The LCO may eliminate from consideration products with significant quantities of toxic, flammable, corrosive, or carcinogenic material and products with potential for harmful chemical emissions. Materials used often or in large quantities will receive the greatest amount of review.

C. Where demolition or construction work occurs adjacent to occupied Space, the Lessor shall erect appropriate barriers (noise, dust, odor, etc.) and take necessary steps to minimize interference with the occupants. This includes maintaining acceptable temperature, humidity, and ventilation in the occupied areas during window removal, window replacement, or similar types of work.

D. HVAC during Construction: If air handlers are used during construction, the Lessor shall provide filtration media with a MERV of 8 at each return air grill, as determined by ANSI/ASHRAE Standard 52.2, Method of Testing General Ventilation Air Cleaning Devices for Removal Efficiency by Particle Size.

E. Flush-Out Procedure:

1. For leases 10,000 RSF or greater
 - i. HVAC flush-out shall commence after construction ends and the Building has been completely cleaned. All interior finishes, such as millwork, doors, paint, carpet, acoustic tiles, and movable furnishings (e.g., partitions, partitions), must be installed, and major VOC punch list items must be finished.

- ii. Prior to occupancy, Lessor shall install new filtration media and perform a building flush-out by supplying a total air volume of 14,000 cubic feet of outdoor air per square foot of gross floor area while maintaining an internal temperature of at least 60°F (15°C) and no higher than 80°F (27°C) and relative humidity no higher than 60%.
- iii. If the LCO determines that occupancy is required before flush-out can be completed, the Space may be occupied only after delivery of a minimum of 3,500 cubic feet of outdoor air per square foot of gross floor area while maintaining an internal temperature of at least 60°F (15°C) and no higher than 80°F (27°C) and relative humidity no higher than 60%. Once the Space is occupied, it must be ventilated at a minimum rate of 0.30 cubic foot per minute (cfm) per square foot of outdoor air or greater. During each day of the flush-out period, ventilation must begin at least three hours before occupancy and continue during occupancy. These conditions must be maintained until a total of 14,000 cubic feet per square foot of outdoor air (4 270 liters of outdoor air per square meter) has been delivered to the space.
- iv. The Lessor shall provide a signed statement explaining how all HVAC systems serving the leased Space will achieve the desired ventilation of the Space during the flush-out period.

2. INTENTIONALLY DELETED

3.52 SYSTEMS COMMISSIONING (OCT 2021)

A. The Lessor shall incorporate commissioning requirements to verify that the installation and performance of energy consuming systems meet the Government's project requirements. These systems include, at a minimum, heating, ventilating, air conditioning and refrigeration (HVAC&R) systems and associated controls, lighting controls, and domestic hot water systems. The commissioning shall cover work associated with TIs or alterations. In instances involving minimal improvements, recommissioning is required to ensure that the systems are operating properly. In the event the Government exercise a renewal option, recommissioning is required within 60 days after the exercising of the option.

B. The Lessor shall submit a written commission plan prior to completion of DIDs. In instances involving minimal improvements not requiring DIDs, the plan is due within 60 days prior to Space acceptance. The plan shall include:

- 1. A schedule of systems commissioning (revised as needed during all construction phases of the project, with such revisions provided to the LCO immediately); and
- 2. A description of how commissioning requirements will be met and confirmed.

3.53 DUE DILIGENCE AND NATIONAL ENVIRONMENTAL POLICY ACT REQUIREMENTS – LEASE (SEP 2014)

A. Environmental Due Diligence

Lessor is responsible for performing all necessary "response" actions (as that term is defined at 42 U.S.C. § 9601(25) of the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA)) with regard to all "recognized environmental conditions," as that term is defined in ASTM Standard E1527-13, as such standard may be revised from time to time. This obligation extends to any contamination of the Property where such contamination is not attributable to the Government. Lessor must provide the Government with a summary report demonstrating completion of all required response actions prior to Substantial Completion. Any remediation performed by or on behalf of Lessor must be undertaken in strict compliance with all applicable federal, state and local laws and regulations.

B. National Environmental Policy Act

The National Environmental Policy Act regulations provide for analyzing proposed major federal actions to determine if there are ways to mitigate the impact of the proposed actions to avoid, minimize, rectify, reduce, or compensate for environmental impacts associated with such actions. Where the Government has determined that any or all of these mitigation measures should be or must be adopted to lessen the impact of these proposed actions, Lessor must incorporate all mitigation measures identified and adopted by the Government in the design and construction drawings and specifications. All costs and expenses for development of design alternatives, mitigation measures and review submittals for work to be performed under the Lease are the sole responsibility of Lessor.

3.54 NATIONAL HISTORIC PRESERVATION ACT REQUIREMENTS - LEASE (SEP 2014)

A. Where a Memorandum of Agreement or other pre-award agreement concluding the Section 106 consultation includes mitigation, design review or other continuing responsibilities of the Government, Lessor must allow the Government access to the Property to carry out compliance activities. Compliance may require excavation for artifact recovery, recordation and interpretation. For Tenant Improvements and other tenant-driven alterations within an existing historic building, new construction or exterior alterations that could affect historic properties, compliance also may require on-going design review. In these instances, Lessor will be required to retain, at its sole cost and expense, the services of a preservation architect who meets or exceeds the *Secretary of the Interior's Professional Qualifications Standards for Historic Architecture*, as amended and annotated and previously published in the Code of Federal Regulations, 36 C.F.R. part 61, and the *GSA Qualifications Standards for Preservation Architects*. These standards are available at: [HTTP://WWW.GSA.GOV/HISTORICPRESERVATION](http://www.gsa.gov/historicpreservation)>Project Management Tools> Qualification Requirements for Preservation Architects. The preservation architect will be responsible for developing preservation design solutions and project documentation required for review by the Government, the State Historic Preservation Officer (SHPO), the Tribal Historic Preservation Officer (THPO), if applicable, and other consulting parties in accordance with Section 106. For Tenant Improvements and other tenant-driven alterations within an existing historic building, the preservation architect must develop context-sensitive design options consistent with the *Secretary of the Interior's Standards for the Treatment of Historic Properties*. Where new construction or exterior alterations, or both, are located within a historic district, may be visible from historic properties or may affect archeological resources, compliance may require tailoring the design of the improvements to be compatible with the surrounding area. Design review may require multiple revised submissions, depending on the complexity of the project and potential for adverse effects to historic properties. GSA is responsible for corresponding with the SHPO, the THPO, if applicable, and any other consulting party.

B. Compliance requirements under Section 106 apply to all historic property alterations and new construction, regardless of the magnitude, complexity or cost of the proposed scope of work.

C. The costs for development of design alternatives and review submittals for work required under the Lease are the sole responsibility of Lessor. In addition, building shell costs relating to such design alternatives are the sole responsibility of Lessor and must be included in the shell rent. Such costs may be offset by federal, state or local preservation tax benefits. Lessor is encouraged to seek independent financial and legal advice concerning the availability of these tax benefits.

3.55 DESIGN EXCELLENCE – LEASE (OCT 2016) INTENTIONALLY DELETED

3.56 DUMPSTER ENCLOSURE & SERVICES

The lessor must provide a dumpster that is enclosed with a lock and key along with trash and dumpster services.

DS
p

DS
BTS

DS
mp

SECTION 4 DESIGN, CONSTRUCTION, AND POST AWARD ACTIVITIES

4.01 SCHEDULE FOR COMPLETION OF SPACE (OCT 2020)

Design and construction activities for the Space shall commence upon Lease award. The Lessor shall schedule the following activities to achieve timely completion of the work required by this Lease:

A. Design Intent Drawing (DID) Workshop: In conjunction with the Government, the Lessor shall commit as part of shell costs to a 2-day DID workshop tentatively scheduled to begin **10 Working Days after award** at the office of the Lessor's architect or an alternate location agreed to by the Government. This session may be held in person or virtually, at the discretion of the Government. The architect will provide full design services so that the DIDs can be completed during this conference. It is expected that at completion of the 2-day DID workshop, the DIDs will be at 90-100% DID.

B. DIDs. For the purposes of this Lease, DIDs are defined as layout line drawings of the leased Space, reflecting all Lease requirements, showing office floor plans, warehouse floor plans, site plan, wareyard and parking plans, partitions and doors; schematic demolition; voice, data, and electrical outlet locations; finishes; generic furniture layout, all requirements in ASR, and any additional details necessary to communicate the design intent to the lessor's architect for the purpose of preparing the construction documents (CDs). In addition, DIDs must show the plan for semi-truck with 53' trailer access and turning radius. A full DID set must include the following elements:

Level 1 (included in shell rent):

1. Cover Sheet;
2. Demolition Plan (if applicable);
3. Construction (Partition) Plan;
4. Power/Communication (Electrical) Plan;
5. Furniture Plan;
6. Finish Plan;
7. Racking System Plan; and
8. The exits and fire department access doors in place or any proposed exits, aisles and fire department access doors.

At the DID workshop, the Lessor shall provide a minimum of three (3) finish options to include coordinated samples of finishes for all interior elements such as paint, wall coverings, base coving, carpet, window treatments, laminates, and flooring. All samples provided must comply with specifications set forth elsewhere in this Lease. The finish options shall be approved by the Government at the DID workshop. The Lessor may not make any substitutions after the finish option is selected.

C. The Government's review and approval of the DIDs is limited to conformance to the specific requirements of the Lease and the client agency build-out requirements as they apply to the Space. The Government will provide formal approval of DIDs in writing **10 Working Days** from the conclusion of the DID workshop.

D. The Lessor's preparation and submission of construction documents (CDs): The Lessor as part of the TI must submit 30% complete CDs conforming to the approved DIDs not later than **15 Working Days** following the approval of DIDs. The Lessor shall also submit CDs in 60%, 90% and 100% completion increments each not later than 15 Working Days following the Government's review of each increment. The pricing for this work is included under the A/E fees established under Section 1 of the Lease. If during the preparation of CDs the Lessor becomes aware that any material requirement indicated in the approved DIDs cannot be reasonably achieved, the Lessor shall promptly notify GSA, and shall not proceed with completion of CDs until direction is received from the LCO. The LCO shall provide direction within **10 Working Days** of such notice, but the Government shall not be responsible for delays to completion of CDs occasioned by such circumstances. For the purpose of this paragraph, a "material requirement" shall mean any requirement necessary for the Government's intended use of the Space as provided for in, or reasonably inferable from, the Lease and the approved DIDs (e.g., number of workstations and required adjacencies).

E. Government review of CDs: The Government shall have **10 Working Days** to review each iteration of the CDs. The Government shall have 10 Working Days to review before Lessor proceeds to prepare a TI price proposal for the work described in the 100% CDs. At any time during this period of review, the Government shall have the right to require the Lessor to modify the CDs to enforce conformance to Lease requirements and the approved DIDs.

F. The Lessor's preparation and submission of the TI price proposal: The Lessor shall prepare and submit a complete TI price proposal in accordance with this Lease within **10 Working Days** following the end of the Government CD review period.

G. INTENTIONALLY DELETED

H. Negotiation of TI and BSAC price proposals and issuance of notice to proceed (NTP): The Government shall issue NTP within **20 Working Days** following the submission of the TI and BSAC price proposals, unless these have been priced as turnkey, provided that price proposals conform to the requirements of the Lease and the parties negotiate a fair and reasonable price.

I. Construction of TIs and completion of other required construction work: The Lessor shall complete all work required to prepare the Premises as required in this Lease ready for use not later than **180 working days following issuance of NTP**.

4.02 CONSTRUCTION DOCUMENTS (SEP 2012)

LEASE NO. GS-08P-LUT00091, PAGE 30

LESSOR:

GOVERNMENT:

GSA TEMPLATE L100
REV (10/21)

The Lessor's CDs shall include all mechanical, electrical, plumbing, fire protection, life safety, lighting, structural, security, and architectural improvements scheduled for inclusion into the Space. CDs shall be annotated with all applicable specifications. CDs shall also clearly identify TIs already in place and the work to be done by the Lessor or others. Notwithstanding the Government's review of the CDs, the Lessor is solely responsible and liable for their technical accuracy and compliance with all applicable Lease requirements.

4.03 TENANT IMPROVEMENTS PRICE PROPOSAL (OCT 2020)

A. The Lessor's TI price proposal shall be supported by sufficient cost or pricing data to enable the Government to evaluate the reasonableness of the proposal, or documentation that the Proposal is based upon competitive proposals (as described below) obtained from entities not affiliated with the Lessor. Any work shown on the CDs that is required to be included in the Building shell rent or already priced as BSAC shall be clearly identified and excluded from the TI price proposal. After negotiation and acceptance of the TI price, GSA shall issue a NTP to the Lessor.

B. Under the provisions of FAR Subpart 15.4, the Lessor shall submit a TI price proposal with information that is adequate for the Government to evaluate the reasonableness of the price or determining cost realism for the TIs within the time frame specified in this section. The TI price proposal shall use the fee rates specified in the "Tenant Improvement Fee Schedule" paragraph of this Lease. The Lessor shall exclude from the TI price proposal all costs for fixtures and/or other TIs already in place, provided the Government has accepted same. However, the Lessor will be reimbursed for costs to repair or improve the fixture(s) and/or any other improvements already in place. The Lessor must provide certified cost or pricing data for TI proposals exceeding the threshold in FAR 15.403-4, to establish a fair and reasonable price. For TI proposals that do not exceed the threshold in FAR 15-403-4, the Lessor shall submit adequate documentation to support the reasonableness of the price proposal as determined by the LCO.

C. The TIs scope of work includes the Lease, the DIDs, the CDs, and written specifications. In cases of discrepancies, the Lessor shall immediately notify the LCO for resolution. All differences will be resolved by the LCO in accordance with the terms and conditions of the Lease.

D. In lieu of requiring the submission of detailed cost or pricing data as described above, the Government (in accordance with FAR 15.403) is willing to negotiate a price based upon the results of a competitive proposal process. A minimum of two qualified General Contractors (GCs) shall be invited by the Lessor to participate in the competitive proposal process. Each participant shall compete independently in the process. In the absence of sufficient competition from the GCs, a minimum of two qualified subcontractors from each trade of the Tenant Improvement Cost Summary (TICS) Table (described below) shall be invited to participate in the competitive proposal process.

E. Each TI proposal shall be (1) submitted by the proposed General Contractors (or subcontractors) using the TICS Table in CSI Masterformat (filling out all sheets, including each division tab, as necessary); (2) reviewed by the Lessor prior to submission to the Government to ensure compliance with the scope of work (specified above) and the proper allocation of shell and TI costs; and (3) reviewed by the Government. General Contractors shall submit the supporting bids from the major subcontractors along with additional backup to the TICS Table in a format acceptable to the Government.

F. Unless specifically designated in this Lease as a TI or BSAC cost, all construction costs shall be deemed to be included in the Shell Rent. Any costs in the GC's proposal for Building shell items shall be clearly identified on the TICS Table separately from the TI costs.

G. The Government reserves the right to determine if bids meet the scope of work, that the price is reasonable, and that the Lessor's proposed contractors are qualified to perform the work. The Government reserves the right to reject all bids at its sole discretion. The Government reserves the right to attend or be represented at all negotiation sessions between the Lessor and potential contractors.

H. The Lessor shall demonstrate to the Government that best efforts have been made to obtain the most competitive prices possible, and the Lessor shall accept responsibility for all prices through direct contracts with all contractors. The LCO shall issue to the Lessor a NTP with the TIs upon the Government's sole determination that the Lessor's proposal is acceptable. The Lessor shall complete the work within the time frame specified in this section of the Lease.

4.04 BUILDING SPECIFIC AMORTIZED CAPITAL (BSAC) PRICE PROPOSAL (SEP 2016) INTENTIONALLY DELETED

4.05 GREEN LEASE SUBMITTALS (OCT 2021)

The Lessor shall submit to the LCO:

- A. Product data sheets upon request for floor coverings, paints and wall coverings, ceiling materials, all adhesives, wood products, suite and interior doors, subdividing partitions, wall base, door hardware finishes, window coverings, millwork substrate and millwork finishes, lighting and lighting controls, and insulation to be used within the leased Space. This information must be submitted NO LATER THAN the submission of the DIDs, if applicable.
- B. SDS or other appropriate documents upon request for products listed in the Lease. All SDS shall comply with Occupational Safety and Health Administration (OSHA) requirements for the Globally Harmonized System of Classification and Labeling of Chemicals (GHS). The Lessor and its agents shall comply with all recommended measures in the SDS to protect the health and safety of personnel.
- C. Re-use plan, in accordance with the "Existing Fit-out, Salvaged, or Re-used Building Material" paragraph in the Lease, if applicable.
- D. If the Lessor is unable to comply with the environmentally preferable requirements stated throughout the Lease, he/she must submit a waiver request for each material within the TI pricing submittal. The waiver request shall be based on the following exceptions:
 1. Product cannot be acquired competitively within a reasonable performance schedule.
 2. Product cannot be acquired that meets reasonable performance requirements.
 3. Product cannot be acquired at a reasonable price.
 4. An exception is provided by statute.

The price shall be deemed unreasonable when the total life cycle costs are significantly higher for the sustainable product versus the non-sustainable product. Life cycle costs are determined by combining the initial costs of a product with any additional costs or revenues generated from that product during its entire life.

- E. Radon test results as may be required by the "Radon in Air" and "Radon in Water" paragraphs in the Lease.
- F. Submittal requirements as may be required by the "Construction Waste Management" paragraph in the Lease.
- G. Recycling service plan as may be required by the "Recycling" paragraph in the Lease.
- H. Signed statement as may be required by the "Indoor Air Quality Construction" paragraph in the Lease.
- I. Written commissioning plan as may be required by the "Systems Commissioning" paragraph in the Lease.
- J. INTENTIONALLY DELETED
- K. If renewable source power is purchased, documentation within 9 months of occupancy.

4.06 CONSTRUCTION SCHEDULE AND INITIAL CONSTRUCTION MEETING (OCT 2020)

The Lessor shall furnish a detailed construction schedule (such as Critical Path Method) to the Government within **10 Working Days** of issuance of the NTP. Such schedule shall also indicate the dates available for Government contractors to install telephone/data lines or equipment, if needed. Within **5 Working Days** of NTP, the Lessor shall initiate a construction meeting. This meeting may be held in person or virtually, at the discretion of the Government. The Lessor will have contractor representatives including its architects, engineers, general contractor and sub-contractor representatives in attendance. The Lessor shall keep meeting minutes of discussion topics and attendance.

4.07 PROGRESS REPORTS (OCT 2020)

After start of construction, the Lessor shall submit to the LCO written progress reports at intervals of **10 Working Days**. Each report shall include information as to the percentage of the work completed by phase and trade; a statement as to expected completion and occupancy dates; changes introduced into the work; and general remarks on such items as material shortages, strikes, weather, etc., that may affect timely completion. In addition, at the Government's discretion, the Lessor shall conduct meetings every two weeks to brief Government personnel and/or contractors regarding the progress of design and construction of the Space. These meetings may be held in person or virtually, at the discretion of the Government. The Lessor shall be responsible for taking and distributing minutes of these meetings.

4.08 CONSTRUCTION INSPECTIONS (SEP 2015)

- A. The LCO or the LCO's designated technical representative may periodically inspect construction work to review compliance with Lease requirements and approved DIDs, if applicable.
- B. Periodic reviews, witnessing of tests, and inspections by the Government shall not constitute approval of the Lessor's apparent progress toward meeting the Government's objectives but are intended to discover any information which the LCO may be able to call to the Lessor's attention to prevent costly misdirection of effort. The Lessor shall remain responsible for designing, constructing, operating, and maintaining the Building in full accordance with the requirements of the Lease.

4.09 ACCESS BY THE GOVERNMENT PRIOR TO ACCEPTANCE (SEP 2013)

The Government shall have the right to access any space within the Building during construction for the purposes of performing inspections or installing Government furnished equipment. The Government shall coordinate the activity of Government contractors with the Lessor to minimize conflicts with and disruption to other contractors on site. Access shall not be unreasonably denied to authorized Government officials including, but not limited to, Government contractors, subcontractors, or consultants acting on behalf of the Government on this project.

4.10 ACCEPTANCE OF SPACE AND CERTIFICATE OF OCCUPANCY (OCT 2021)

- A. Ten (10) Working Days prior to the completion of the Space, the Lessor shall issue written notice to the Government to schedule the inspection of the Space for acceptance. The Government shall accept the Space only if the construction of Building shell and TIs conforming to this Lease and the approved DIDs, if applicable, is substantially complete, a Certificate of Occupancy (C of O) has been issued as set forth below, and the Building improvements necessary for acceptance as described in the paragraph "Building Improvements" are completed.
- B. The Space shall be considered substantially complete only if the Space may be used for its intended purpose, and completion of remaining work will not interfere unreasonably with the Government's enjoyment of the Space. Acceptance shall be final and binding upon the Government with respect to conformance of the completed TIs to the approved DIDs, with the exception of items identified on a punch list generated as a result of the inspection, concealed conditions, latent defects, or fraud, but shall not relieve the Lessor of any other Lease requirements.
- C. The Lessor shall provide a valid C of O, issued by the local jurisdiction, for the intended use of the Government. If the local jurisdiction does not issue C of O's or if the C of O is not available, the Lessor may satisfy this condition by providing a report prepared by a licensed fire protection engineer that indicates the Space and Building are compliant with all applicable local codes and ordinances and all fire protection and life safety-related requirements of this Lease.
- D. The Government will not be required to accept space prior to the schedule outlined in

E. If applicable, upon acceptance of the Space, the Government will issue lump sum payment to the Lessor after substantial completion, in accordance with invoicing procedures outlined under any lease amendment(s) authorizing such lump sum payment. The Government shall not issue this payment in increments or as partial payments.

4.11 LEASE TERM COMMENCEMENT DATE AND RENT RECONCILIATION (OCT 2021)

At acceptance, the Space shall be measured in accordance with the standards set forth in this Lease to determine the total ABOA SF in the Space. The rent for the Space will be adjusted based upon the measured ABOA square footage as outlined under the Payment clause of the General Clauses. At acceptance, the Lease term shall commence. The Lease Term Commencement Date, final measurement of the Space, reconciliation of the annual rent, and amount of Commission Credit, if any, shall be memorialized by Lease Amendment.

4.12 AS-BUILT DRAWINGS (OCT 2021)

Not later than **30** days after the acceptance of the Space, the Lessor, at Lessor's expense, shall furnish to the Government a complete set of Computer Aided Design (CAD) files of as-built floor plans showing the Space under Lease, as well as corridors, stairways, and core areas. As-built drawings shall include those for Civil, Architectural, Mechanical, Electrical, and Plumbing features, including, but not limited to, those for IT, Communications, Security, and Fire Protection. The plans shall have been generated by a CAD program which is compatible with the latest release of AutoCAD. The required file extension is ".DWG." Clean and purged files shall be submitted in a digital format. They shall be labeled with Building name, address, list of drawing(s), date of the drawing(s), and Lessor's architect and architect's phone number.

4.13 LIQUIDATED DAMAGES (~~JUN 2012~~) INTENTIONALLY DELETED

4.14 SEISMIC RETROFIT (SEP 2013)

The following requirements apply to Leases requiring seismic retrofit:

A. The Lessor shall provide a final construction schedule, all final design and construction documents for the seismic retrofit, including structural calculations, drawings, and specifications to the Government for review and approval prior to the start of construction. When required by local building code, a geotechnical report shall be made available to the Government.

B. The Lessor's registered civil or structural engineer shall perform special inspections to meet the requirements of Chapter 17 of the International Building Code (IBC).

C. For Leases requiring seismic retrofit, the Space will not be considered substantially complete until a Seismic Form E - Certificate Of Seismic Compliance - Retrofitted Building, certifying that the Building meets the Basic Safety Objective of ASCE/SEI 41, executed by a registered civil or structural engineer, has been delivered to the LCO.

4.15 LESSOR'S PROJECT MANAGEMENT RESPONSIBILITIES (OCT 2020)

A. The Lessor's project management fee shall cover all of the Lessor's project management costs associated with the delivery of Tenant Improvements, including, but not limited to:

1. Legal fees
2. Travel costs
3. Insurance
4. Home office overhead and other indirect costs
5. Carrying costs, exclusive of the TI amortization rate. Carrying costs are those costs of capital incurred for the delivery of TI, for the period starting from Lessor's outlay of funds, until the Lease Term Commencement Date.
6. Municipal, county, or state fees (not related to sales tax or construction permits associated with TI buildout)
7. TI proposal preparation costs
8. Lessor's labor costs related to the management of the TI build-out.

A. The Lessor's TI rent shall cover all of the Lessor's project management costs associated with the delivery of Tenant Improvements, including, but not limited to:

1. Legal fees
2. Travel costs
3. Insurance
4. Home office overhead and other indirect costs
5. Carrying costs, exclusive of the TI amortization rate. Carrying costs are those costs of capital incurred for the delivery of TI, for the period starting from Lessor's outlay of funds, until the Lease Term Commencement Date.
6. Municipal, county, or state fees, including sales tax and construction permits associated with TI buildout.
7. TI proposal preparation costs
8. Lessor's labor costs related to the management of the TI build-out.

B. At a minimum, the Lessor shall be responsible for performing the following services:

1. Provide assistance and expertise to the Government project team in the form of coordination, management, and administration of the design and construction process;

- 2. Monitor performance of the general contractor and other contractors, control schedules, and oversee financial accounts;
- 3. Conduct and document design and construction project meetings;
- 4. Perform administrative tasks, including documentation, record keeping (issuing meeting minutes), and payment validation in addition to submittal and change order processing;
- 5. Maintain Request for Information (RFI), submittal, and change order logs; and
- 6. Provide technical expertise (e.g., testing, estimating, resolving claims, or responding to inquiries).

4.16 GOVERNMENT PROJECT MANAGEMENT SYSTEM (OCT 2021)

The Government may direct the Lessor to use the Government's designated project management system for post-award and post-occupancy activities. This includes, but is not limited to, design submittals (DIDs, CD, as-builts), schedule submissions, pricing proposals, reuse plans, commissioning plans, and product data sheets.

DS
p

DS
BTS

DS
mp

SECTION 5 TENANT IMPROVEMENT COMPONENTS

5.01 TENANT IMPROVEMENT REQUIREMENTS (OCT 2016)

The TIs shall be designed, constructed, and maintained in accordance with the standards set forth in this Lease. For pricing, only those requirements designated within this Section 5, or designated as TIs within the attached agency requirements and Security Requirements, shall be deemed to be TI costs.

5.02 TENANT IMPROVEMENT SPECIFICATIONS (SEP 2015) INTENTIONALLY DELETED

5.03 FINISH SELECTIONS (SEP 2015)

The Lessor must consult with the Government prior to developing a minimum of three (3) finish options to include coordinated samples of finishes for all interior elements such as paint, wall coverings, base coving, carpet, window treatments, laminates, and flooring. All samples provided must comply with specifications set forth elsewhere in this Lease. All required finish option samples must be provided at no additional cost to the Government within 10 Working Days after initial submission of DIDs, if applicable. GSA must deliver necessary finish selections to the Lessor within 10 Working Days after receipt of samples. The finish options must be approved by GSA prior to installation. The Lessor may not make any substitutions after the finish option is selected.

5.04 WINDOW COVERINGS (JUN 2012)

A. Window Blinds. All exterior windows shall be equipped with window blinds which shall be Mecho-shade or equivalent (see agency ASRs).

5.05 DOORS: SUITE ENTRY (OCT 2019)

A. Suite entry doors shall be provided as part of the TIs and shall have a minimum clear opening of 32" wide x 84" high (per leaf). Doors shall meet the requirements of being a flush, solid core, 1-3/4-inch thick, wood door with a natural wood veneer face or an equivalent pre-approved by the Government. Hollow core wood doors are not acceptable. They shall be operable by a single effort; and shall meet the requirement of NFPA 101, Life Safety Code or the International Building Code (current as of the Lease Award Date). Doors shall be installed in a metal frame assembly which is primed and finished with a low VOC semi-gloss oil-based paint finish that does not result in indoor air quality levels above 0.016 parts per million (ppm) of formaldehyde.

B. For leases 10,000 RSF or greater, the paint finish must meet applicable, statutory environmentally preferable criteria related to biobased and recovered material content as outlined in the Green Procurement Compilation at [HTTPS://SFTOOL.GOV/GREENPROCUREMENT](https://sftool.gov/greenprocurement/green-products/3/building-finishes/1338/paint/0?addon=False).and <https://sftool.gov/greenprocurement/green-products/3/building-finishes/1338/paint/0?addon=False>.

5.06 DOORS: INTERIOR (OCT 2019)

A. Doors within the Space shall be provided as part of the TIs and shall have a minimum clear opening of 32" wide x 80" high. Doors shall be flush, solid core, wood with a natural wood veneer face or an equivalent door pre-approved by the LCO. Hollow core wood doors are not acceptable. They shall be operable with a single effort, and shall meet the requirements of NFPA 101, Life Safety Code or the International Building Code (current as of the Lease Award Date). Doors shall be installed in a metal frame assembly which is primed and finished with a low VOC semi-gloss oil-based paint and which does not result in indoor air quality levels above 0.016 parts per million (ppm) of formaldehyde.

B. For leases 10,000 RSF or greater, the paint finish must meet applicable, statutory environmentally preferable criteria related to biobased and recovered material content as outlined in the Green Procurement Compilation at [HTTPS://SFTOOL.GOV/GREENPROCUREMENT](https://sftool.gov/greenprocurement/green-products/3/building-finishes/1338/paint/0?addon=False).and <https://sftool.gov/greenprocurement/green-products/3/building-finishes/1338/paint/0?addon=False>.

5.07 DOORS: HARDWARE (SEP 2013)

Doors shall have door handles or door pulls with heavyweight hinges. The Lessor is encouraged to avoid the use of chrome-plated hardware. All doors shall have corresponding doorstops (wall- or floor-mounted) and silencers. All door entrances leading into the Space from public corridors and exterior doors shall have automatic door closers. Doors designated by the Government shall be equipped with 5-pin, tumbler cylinder locks and strike plates. All locks shall be master keyed. Furnish at least two master keys for each lock to the Government. Any exterior entrance shall have a high security lock, with appropriate key control procedures, as determined by Government specifications. Hinge pins and hasps shall be secured against unauthorized removal by using spot welds or pinned mounting bolts. The exterior side of the door shall have a lock guard or astragal to prevent tampering of the latch hardware. Doors used for egress only shall not have any operable exterior hardware. All security-locking arrangements on doors used for egress shall comply with requirements of NFPA 101 or the International Building Code current as of the Lease Award Date.

5.08 DOORS: IDENTIFICATION (JUN 2012)

Door identification shall be installed in approved locations adjacent to office entrances as part of the TIs. The form of door identification shall be approved by the Government.

5.09 PARTITIONS: SUBDIVIDING (OCT 2020)

A. Partition types and heights and sound transmission class (STC) shall be determined during design. They shall have a flame spread rating of 25 or less and a smoke development rating of 450 or less (ASTM E-84).

B. HVAC shall be rebalanced, and lighting repositioned, as appropriate, after installation of partitions.

DS
p
DS
BTS
DS
mp

C. If installed in accordance with the "Automatic Fire Sprinkler System" and "Fire Alarm System" paragraphs, sprinklers and fire alarm notification appliances shall be repositioned as appropriate after installation of partitions to maintain the level of fire protection and life safety.

D. Partitioning requirements may be satisfied with existing partitions if they meet the Government's standards and layout requirements.

E. For leases 10,000 RSF or greater where the Government is a sole tenant of the Building, the Lessor is encouraged to use materials for newly installed gypsum board meeting applicable environmentally preferable criteria that are recommended in the Green Procurement Compilation at [HTTPS://SFTOOL.GOV/GREENPROCUREMENT](https://sftool.gov/greenprocurement) and <https://sftool.gov/greenprocurement/green-products/3/building-finishes/1735/wallboardgypsum-boarddrywall/0?addon=False>.

5.10 WALL FINISHES (OCT 2019)

If the Government chooses to install a wall covering, the following specifications shall apply:

A. Commercial grade, weighing not less than 13 ounces per square yard.

B. For leases 10,000 RSF or greater, wall covering shall be vinyl-free, chlorine-free, plasticizer-free, with recycled or bio-based content. If the Government chooses to install a high-performance paint coating, it shall comply with the VOC limits of the Green Seal Standard GS-11.

5.11 PAINTING – TI (OCT 2019)

A. Prior to acceptance, all surfaces within the Space which are designated by GSA for painting shall be newly finished in colors and type of paint acceptable to the Government.

B. For leases 10,000 RSF or greater, the Lessor shall provide interior paints, primers, coatings, stains, and sealers that meet applicable, statutory, environmentally preferable criteria for biobased and recovered material content as outlined under the Green Procurement Compilation at [HTTPS://SFTOOL.GOV/GREENPROCUREMENT](https://sftool.gov/greenprocurement) and <https://sftool.gov/greenprocurement/green-products/3/building-finishes/1338/paint/0?addon=False>. The Lessor shall use reprocessed latex paint in accordance with EPA's CPG (Comprehensive Procurement Guidelines) on all painted surfaces where feasible.

5.12 FLOOR COVERINGS AND PERIMETERS (OCT 2019)

A. Broadloom carpet or carpet tiles shall meet the requirements set forth in the specifications below. Floor perimeters at partitions shall have wood, rubber, vinyl, or carpet base. Floor covering shall be installed in accordance with manufacturing instructions to lay smoothly and evenly.

B. The use of existing carpet may be approved by the Government; however, existing carpet shall be repaired, stretched, and cleaned before occupancy and shall meet the static buildup requirement as stated in the specifications below.

C. Any alternate flooring shall be pre-approved by the Government.

D. SPECIFICATIONS FOR CARPET TO BE NEWLY INSTALLED OR REPLACED

1. Product sustainability and environmental requirements. For leases 10,000 RSF or greater, floor covering and perimeter products must meet applicable, statutory, environmentally preferable criteria related to biobased and recovered material content as outlined under the Green Procurement Compilation at WWW.SFTOOL.GOV/GREENPROCUREMENT and [HTTPS://SFTOOL.GOV/GREENPROCUREMENT/GREEN-PRODUCTS/3/BUILDING-FINISHES/23/CARPET/0?ADDON=FALSE](https://sftool.gov/greenprocurement/green-products/3/building-finishes/23/CARPET/0?ADDON=FALSE), [HTTPS://SFTOOL.GOV/GREENPROCUREMENT/GREEN-PRODUCTS/3/BUILDING-FINISHES/1307/FLOOR-COVERINGS-NON-CARPET/0?ADDON=FALSE](https://sftool.gov/greenprocurement/green-products/3/building-finishes/1307/FLOOR-COVERINGS-NON-CARPET/0?ADDON=FALSE), and <https://sftool.gov/greenprocurement/green-products/3/building-finishes/97/floor-tiles-heavy-dutycommercial/0?addon=False>.

2. Face fiber content. Face yarn must be 100 percent nylon fiber. Loop Pile shall be 100 percent Bulk Continuous Filament (BCF); cut and loop shall be 100 percent BCF for the loop portion and may be BCF or staple for the cut portion; cut pile carpet shall be staple or BCF.

3. Performance requirements for broadloom and modular tile:

a. Static: Less than or equal to 3.5 kV when tested by AATCC Test Method 134 (Step Test Option).

b. Flammability: Meets CPSC-FF-1-70, DOC-FF-1-70 Methenamine Tablet Test criteria.

c. Flooring Radiant Panel Test: Meets NFPA 253 Class I or II depending upon occupancy and fire code when tested under ASTM E-648 for glue down installation.

d. Smoke Density: NBS Smoke Chamber - Less than 450 Flaming Mode when tested under ASTM E-662.

NOTE: Testing must be performed in a NVLAP accredited laboratory.

4. Texture Appearance Retention Rating (TARR). Carpet must meet TARR rating of at least 3.0 TARR for moderate traffic areas such as private offices, and heavy traffic areas such as training space, conference rooms, courtrooms, etc., and at least 3.5 TARR for severe traffic areas, including open office space, cafeteria, corridors and lobbies. The carpet must be evaluated using ASTM D-5252 Hexapod Drum Test as per the commercial carpet test procedure and the TARR classification determined using ASTM D-7330.

5. Carpet reclamation. Reclamation of existing carpet to be determined with potential vendor. When carpet is replaced, submit certification documentation from the reclamation facility to the LCO.

6. Warranty. Submit a copy of the manufacturer's standard warranty to the LCO within the first 60 days of Government occupancy. The Government is to be a beneficiary of the terms of this warranty.

5.13 HEATING AND AIR CONDITIONING (JUN 2012)

Zone Control. Provide individual thermostat control for office Space with control areas not to exceed 1,500 ABOA SF. Interior spaces must be separately zoned. Specialty occupancies (conference rooms, kitchens, etc.) must have active controls capable of sensing Space use and modulating HVAC system in response to Space demand. Areas that routinely have extended hours of operation shall be environmentally controlled through dedicated heating and air conditioning equipment. Special purpose areas (such as photocopy centers, large conference rooms, computer rooms, etc.) with an internal cooling load in excess of 5 tons shall be independently controlled. Provide concealed package air conditioning equipment to meet localized spot cooling of tenant special equipment. Portable space heaters are prohibited.

5.14 ELECTRICAL: DISTRIBUTION (SEP 2015)

A. All electrical, telephone, and data outlets within the Space shall be installed by the Lessor in accordance with the DIDs, if applicable. All electrical outlets shall be installed in accordance with NFPA Standard 70.

B. All outlets within the Space shall be marked and coded for ease of wire tracing; outlets shall be circuited separately from lighting. All floor outlets shall be flush with the plane of the finished floor. Outlet cover colors shall be coordinated with partition finish selections.

C. The Lessor shall in all cases safely conceal outlets and associated wiring (for electricity, voice, and data) to the workstation(s) in partitions, ceiling plenums, in recessed floor ducts, under raised flooring, or by use of a method acceptable to the Government.

5.15 TELECOMMUNICATIONS: DISTRIBUTION AND EQUIPMENT (JUN 2012)

Telecommunications floor or wall outlets shall be provided as part of the TIs. At a minimum, each outlet shall house one 4-pair wire jack for voice and one 4-pair wire jack for data. The Lessor shall ensure that all outlets and associated wiring, copper, coaxial cable, optical fiber, or other transmission medium used to transmit telecommunications (voice, data, video, Internet, or other emerging technologies) service to the workstation shall be safely concealed under raised floors, in floor ducts, walls, columns, or molding. All outlets/junction boxes shall be provided with rings and pull strings to facilitate the installation of cable. Some transmission medium may require special conduit, inner duct, or shielding as specified by the Government.

5.16 TELECOMMUNICATIONS: LOCAL EXCHANGE ACCESS (AUG 2008)

Provide sealed conduit to house the agency telecommunications system when required.

5.17 DATA DISTRIBUTION (OCT 2020)

The Lessor shall purchase and install data cable as part of the tenant improvements. The Lessor shall safely conceal data outlets and the associated wiring used to transmit data to workstations in floor ducts, walls, columns, or below access flooring. When cable consists of multiple runs, the Lessor shall provide ladder type or other acceptable cable trays to prevent cable coming into contact with suspended ceilings or sprinkler piping. Cable trays shall form a loop around the perimeter of the Space such that they are within a 30-foot horizontal distance of any single drop. If the Government chooses to purchase and install data cabling, then the Lessor shall provide, as part of the tenant improvements, outlets with rings and pull strings to facilitate the installation of the data cable.

5.18 ELECTRICAL, TELEPHONE, DATA FOR SYSTEMS FURNITURE (OCT 2020)

A. The Lessor shall provide as part of the TIs separate data, telephone, and electric junction boxes for the base feed connections to Government provided modular or systems furniture, when such feeds are supplied via wall outlets or floor penetrations. When overhead feeds are used, junction boxes shall be installed for electrical connections. Raceways shall be provided throughout the furniture panels to distribute the electrical, telephone, and data cable. The Lessor shall provide all electrical service wiring and connections to the furniture at designated junction points. Each electrical junction shall contain an 8-wire feed consisting of 3 general purpose 120-V circuits with 1 neutral and 1 ground wire, and a 120-V isolated ground circuit with 1 neutral and 1 isolated ground wire. A 20-ampere circuit shall have no more than 8 general purpose receptacles or 4 isolated ground "computer" receptacles.

B. The Lessor shall purchase and install data and telecommunications cable. Said cable shall be installed and connected to systems furniture by the Lessor/contractor with the assistance and/or advice of the Government or computer vendor. The Lessor shall provide wall mounted data and telephone junction boxes. When cable consists of multiple runs, the Lessor shall provide ladder-type or other acceptable cable trays to prevent Government provided cable coming into contact with suspended ceilings or sprinkler piping. Cable trays shall form a loop around the perimeter of the Space such that they are within a 30-foot horizontal distance of any single drop. Said cable trays shall provide access to both telecommunications data closets and telephone closets. If the Government chooses to purchase and install data and telecommunications cabling, then the Lessor shall provide, as part of the TIs, outlets with rings and pull strings to facilitate the installation of the data cable.

C. The Lessor shall furnish and install suitably sized junction boxes near the "feeding points" of the furniture panels. All "feeding points" shall be shown on Government approved design intent drawings. The Lessor shall temporarily cap off the wiring in the junction boxes until the furniture is installed. The Lessor shall make all connections in the power panel and shall keep the circuit breakers off. The Lessor shall identify each circuit with the breaker number and shall identify the computer hardware to be connected to it. The Lessor shall identify each breaker at the panel and identify the devices that it serves.

D. The Lessor's electrical contractor must connect power poles or base feeds in the junction boxes to the furniture electrical system and test all pre-wired receptacles in the systems furniture. Other Government contractors will be installing the data cable in the furniture panels for the terminal and printer locations, installing the connectors on the terminal/printer ends of the cable, and continuity testing each cable. Work shall be coordinated and performed in conjunction with the furniture, telephone, and data cable installers. Much of this work may occur over a weekend on a schedule that requires flexibility and on-call visits. The Lessor must coordinate the application of Certification of Occupancy with furniture installation.

5.19 LIGHTING: INTERIOR AND PARKING – TI (SEP 2015)

DS
p
DS
BTS
DS
mp

Office Space Only:

- A. **FIXTURES:** Once the design intent drawings are approved, the Lessor shall design and provide interior lighting to comply with requirements under the paragraph, "Lighting: Interior and Parking – Shell." Any additional lighting fixtures and/or components required beyond what would have been provided for an open office plan (shell) are part of the TIs.
- B. **PENDANT STYLE FIXTURES:** If pendant style lighting fixtures are used, the increase between the number of fixtures required in the Building shell and the Space layout is part of the TIs.
- C. **MIXED FIXTURES:** DIDs, if applicable, may require a mixed use of recessed or pendant style fixtures in the Space.
- D. **BUILDING PERIMETER:** There may be additional requirements for lighting in exterior parking areas, vehicle driveways, pedestrian walkways, and Building perimeter in the Security Requirements attached to this Lease.

Warehouse Space Only:

- E. **FIXTURES:** Once the design intent drawings are approved, the Lessor shall design and provide interior lighting to comply with requirements under the paragraph, "Lighting: Interior and Parking—Shell." Any additional lighting fixtures and/or components required beyond what would have been provided for an open warehouse 10-foot candle plan plus shipping & receiving areas of 30 foot candles (Shell) are part of the TIs.
- F. Lighting for the warehouse, shipping, and receiving portions of the Space is detailed in Section 3 and is part of Shell.
- G. **BUILDING PERIMETER:** There may be additional requirements for lighting in exterior parking areas, vehicle driveways, pedestrian walkways, and Building perimeter in the Security Requirements attached to this Lease. Such additional lighting required to meet Security Requirements shall be BSAC.

5.20 AUTOMATIC FIRE SPRINKLER SYSTEM - TI (OCT 2016)

Where sprinklers are required in the Space, sprinkler mains and distribution piping in a "protection" layout (open plan) with heads turned down with an escutcheon or trim plate shall be provided as part of Shell rent. Any additional sprinkler fixtures and/or components required in the Space beyond what would have been provided for an open office plan (shell) are part of the TIs.

DS
p

DS
BTS

DS
mp

SECTION 6 UTILITIES, SERVICES, AND OBLIGATIONS DURING THE LEASE TERM

6.01 PROVISION OF SERVICES, ACCESS, AND NORMAL HOURS (JUN 2012)

A. The Government's normal hours of operations are established as **7:00 AM to 5:00 PM**, Monday through Friday, with the exception of Federal holidays. Services, maintenance, and utilities shall be provided during these hours. The Government shall have access to the Premises and its Appurtenant Areas at all times without additional payment, including the use, during other than normal hours, of necessary services and utilities such as elevators, restrooms, lights, and electric power. Cleaning shall be performed after normal hours.

B. The Lessor and the Lessor's representatives, employees and contractors shall demonstrate a cooperative, positive, welcoming, respectful, professional and business-like demeanor and shall present a neat, clean, job-appropriate (professional) appearance.

6.02 UTILITIES (APR 2011) INTENTIONALLY DELETED

VERSION 2:

6.03 UTILITIES SEPARATE FROM RENTAL/BUILDING OPERATING PLAN (OCT 2020)

A. If any utilities are excluded from the rental consideration, the Lessor shall obtain a statement from a registered professional engineer stating that all HVAC, plumbing, and other energy intensive Building systems can operate under the control conditions stated in the Lease. The statement shall also identify all Building systems which do not conform to the system performance values, including the "recommended" or "suggested" values of ANSI/ASHRAE Standard 90.1, Energy Standard for Buildings Except Low-Rise Residential Buildings, according to the version that corresponds with how the Building systems were designed to perform, or state or local codes.

B. The Lessor shall provide and install as part of shell rent, separate meters for utilities. Sub meters are not acceptable. The Lessor shall furnish in writing to the Government, prior to occupancy by the Government, a record of the meter numbers and verification that the meters measure Government usage only. Proration is not permissible. In addition, an automatic control system shall be provided to assure compliance with heating and air conditioning requirements.

C. The Building operating plan shall be in effect as of the Lease Term Commencement Date and shall include a schedule of startup and shutdown times for operation of each Building system, such as lighting, HVAC, and plumbing.

6.04 UTILITY CONSUMPTION REPORTING (OCT 2016)

Upon the effective date of the Lease, only for leases over 10,000 RSF, the Lessor shall provide regular quarterly reports for the amount of utilities (including water) consumed at the Building broken down by utility type per month for the duration of the Lease. Lessors shall report this utility consumption data within 45 calendar days of the end of each calendar quarter in the Environmental Protection Agency (EPA) Portfolio Manager online tool [HTTPS://WWW.ENERGYSTAR.GOV/](https://www.energystar.gov/). Data reported includes, but is not limited to, the number of actual units consumed, by utility type per month, and associated start and end date(s) for that consumption.

(Refer to the following link for reporting guidance: www.gsa.gov/ucr)

6.05 HEATING AND AIR CONDITIONING (OCT 2020)

A. In all office areas, temperatures shall conform to local commercial equivalent temperature levels and operating practices in order to maximize tenant satisfaction. These temperatures shall be maintained throughout the leased Premises and service areas, regardless of outside temperatures, during the hours of operation specified in the Lease. The Lessor shall perform any necessary systems start-up required to meet the commercially equivalent temperature levels prior to the first hour of each day's operation. At all times, humidity shall be maintained below 60% relative humidity.

B. Throughout the office space, during non-working hours, heating temperatures shall be set no higher than 55° Fahrenheit, and air conditioning shall not be provided except as necessary to return Space temperatures to a suitable level for the beginning of working hours. Thermostats shall be secured from manual operation by key or locked cage. A key shall be provided to the Government's designated representative.

C. Throughout the office space, thermal comfort, during all working hours shall comply with the latest edition of ASHRAE Standard 55, Thermal Comfort Conditions for Human Occupancy.

D. Warehouse areas require heating and cooling by evaporative coolers. Restrooms, showers, lab, radio workroom and workout room need to be heated and cooled by separate HVAC system. Temperature of warehouse or garage areas shall be maintained at a minimum of 50° Fahrenheit.

E. The Lessor shall conduct HVAC system balancing after any HVAC system alterations during the term of the Lease and shall make a reasonable attempt to schedule major construction outside of office hours.

F. Normal HVAC systems' maintenance shall not disrupt tenant operations.

G. **110 ABOA SF** of the Premises shall receive cooling at all times (24 hrs a day, 365 days a year) for purposes of cooling the designated server room. The BTU output of this room is established as **35,000 BTU** per hour. The temperature of this room shall be maintained at **a minimum of 50 degrees and a maximum of 78 degrees F**, with humidity control not to exceed 60% relative humidity, regardless of outside temperature or seasonal changes.

H. In addition to the server room requirements stated above, the following areas shall receive HVAC at all times:

1. PAC Room – 80 ABOA SF; BTU output 40,000; temperature range of 65 – 72 degrees F

I. INTENTIONALLY DELETED

6.06 ~~OVERTIME HVAC USAGE (OCT 2020)~~ INTENTIONALLY DELETED

6.07 JANITORIAL SERVICES (OCT 2021)

The Lessor shall maintain the Premises and all areas of the Property to which the Government has routine access, including high-touch surfaces (e.g., door knobs, light switches, handles, handrails, and elevator buttons) in a clean condition and shall provide supplies and equipment for the term of the Lease. The following schedule describes the level of services intended. Performance will be based on the LCO's evaluation of results, not the frequency or method of performance.

- A. Daily. Empty trash receptacles. Sweep entrances, lobbies, and corridors. Spot sweep floors, and spot vacuum carpets. Clean drinking fountains. Sweep and damp mop or scrub restrooms. Clean all restroom fixtures and replenish restroom supplies. Dispose of all trash and garbage generated in or about the Building. Wash inside and out or steam clean cans used for collection of food remnants from snack bars and vending machines. Dust horizontal surfaces that are readily available and visibly require dusting. Spray buff resilient floors in main corridors, entrances, and lobbies. Clean elevators and escalators. Remove carpet stains. Police sidewalks, parking areas, and driveways. Sweep loading dock areas and platforms. Clean glass entry doors to the Space. Clean all high-touch surfaces.
- B. Three times a week. Sweep or vacuum stairs.
- C. Weekly. Damp mop and spray buff all resilient floors in restrooms and health units. Sweep sidewalks, parking areas, and driveways (weather permitting).
- D. Every two weeks. Spray buff resilient floors in secondary corridors, entrance, and lobbies. Damp mop and spray buff hard and resilient floors in office Space.
- E. Monthly. Thoroughly dust furniture. Completely sweep and/or vacuum carpets. Sweep storage Space. Spot clean all wall surfaces within 70 inches of the floor.
- F. Every two months. Damp wipe restroom wastepaper receptacles, stall partitions, doors, window sills, and frames. Shampoo entrance and elevator carpets.
- G. Three times a year. Dust wall surfaces within 70 inches of the floor, vertical surfaces and under surfaces. Clean metal and marble surfaces in lobbies. Wet mop or scrub garages.
- H. Twice a year. Wash all interior and exterior windows and other glass surfaces. Strip and apply four coats of finish to resilient floors in restrooms. Strip and refinish main corridors and other heavy traffic areas.
- I. Annually. Wash all venetian blinds, and dust 6 months from washing. Vacuum or dust all surfaces in the Building more than 70 inches from the floor, including light fixtures. Vacuum all draperies in place. Strip and refinish floors in offices and secondary lobbies and corridors. Shampoo carpets in corridors and lobbies. Clean balconies, ledges, courts, areaways, and flat roofs.
- J. Every two years. Shampoo carpets in all offices and other non-public areas.
- K. Every five years. Dry clean or wash (as appropriate) all draperies.
- L. As required. Properly maintain plants and lawns. Provide initial supply, installation, and replacement of light bulbs, tubes, ballasts, and starters. Provide and empty exterior ash cans and clean area of any discarded cigarette butts.
- M. Pest control. Control pests as appropriate, using Integrated Pest Management techniques, as specified by the U.S. Environmental Protection Agency at <https://www.epa.gov/ipm/introduction-integrated-pest-management>.
- N. INTENTIONALLY DELETED

6.08 SELECTION OF CLEANING PRODUCTS (OCT 2021)

For leases 10,000 RSF or greater where the Government is a sole occupant of the Building, the Lessor shall use cleaning products (including general purpose cleaners, floor cleaners, hand soap, etc.) that meet applicable, statutory, environmentally preferable criteria related to biobased and recovered material content as outlined under the Green Procurement Compilation at [HTTPS://SFTOOL.GOV/GREENPORCUREMENT](https://SFTOOL.GOV/GREENPORCUREMENT) and <https://sftool.gov/greenprocurement/green-products/5/cleaning-products/0>.

6.09 SELECTION OF PAPER PRODUCTS (OCT 2021)

For leases 10,000 RSF or greater where the Government is a sole occupant of the Building, the Lessor shall select paper and paper products (e.g., restroom tissue and paper towels) that meet applicable, statutory, environmentally preferable criteria related to recovered material content as outlined under the Green Procurement Compilation at [HTTPS://SFTOOL.GOV/GREENPORCUREMENT](https://SFTOOL.GOV/GREENPORCUREMENT) and <https://sftool.gov/greenprocurement/green-products/5/cleaning-products/0>

6.10 SNOW REMOVAL (OCT 2020)

LEASE NO. GS-08P-LUT00091, PAGE 40

LESSOR:

GOVERNMENT:

DS
p

DS
BTS

DS
mp

GSA TEMPLATE L100
REV (10/21)

Lessor shall provide snow removal services for the Government on all days for which this Lease has designated normal hours. Lessor shall clear parking lots if the accumulation of snow exceeds two inches. Lessor shall clear sidewalks, walkways and other entrances before accumulation exceeds 1.5 inches. The snow removal shall take place no later than 5:00 AM, without exception. Should accumulation continue throughout the day, the Lessor shall provide such additional snow removal services to prevent accumulation greater than the maximums specified in this paragraph. In addition to snow removal, the Lessor shall keep walkways, sidewalks and parking lots free of ice during the normal hours. The Lessor shall remove excess buildup of sand and/or ice melt to minimize slipping hazards. If the Building entrance(s) has a northern exposure, then Lessor shall take additional measures (e.g., more frequent snow removal or application of ice-melting agents, warning signs, etc.) to protect the safety of pedestrians.

6.11 MAINTENANCE AND TESTING OF SYSTEMS (SEP 2013)

A. The Lessor is responsible for the total maintenance, repair and replacement of the leased Premises, the Building, and the Property. Such maintenance, repairs and replacements include the site and private access roads, and all necessary repairs and replacements to the loading docks, ramps, levelers and all other associated equipment and features. All equipment and systems shall be maintained, repaired, and replaced to provide reliable, energy efficient service without unusual interruption, disturbing noises, exposure to fire or safety hazards, uncomfortable drafts, excessive air velocities, or unusual emissions of dirt. The Lessor's maintenance responsibility includes initial supply and replacement of all supplies, materials, and equipment necessary for such maintenance. Maintenance, testing, and inspection of appropriate equipment and systems shall be done in accordance with current applicable codes, and inspection certificates shall be displayed as appropriate. Copies of all records in this regard shall be forwarded to the Government's designated representative.

B. At the Lessor's expense, the Government reserves the right to require documentation of proper operations, inspection, testing, and maintenance of fire protection systems, such as, but not limited to, fire alarm, fire sprinkler, standpipes, fire pump, emergency lighting, illuminated exit signs, emergency generator, prior to occupancy to ensure proper operation. These tests shall be witnessed by the Government's designated representative.

6.12 MAINTENANCE OF PROVIDED FINISHES (OCT 2016)

A. Paint, wall coverings. Lessor shall maintain all wall coverings and high-performance paint coatings in "like new" condition for the life of the Lease. All painted surfaces shall be repainted at the Lessor's expense, including the moving and returning of furnishings, any time during the occupancy by the Government if the paint is peeling or permanently stained, except where damaged due to the negligence of the Government. All work shall be done after normal working hours as defined elsewhere in this Lease. In addition to the foregoing requirement,

1. Lessor shall repaint common areas at least every three years.
2. Lessor shall perform cyclical repainting of the Space every **10** years of occupancy. This cost, including the moving and returning of furnishings, as well as disassembly and reassembly of systems furniture per manufacturer's warranty, shall be at the Lessor's expense.
3. Warehouse Space Only: If the warehouse area of the Space was painted originally (or if the warehouse is newly constructed), Lessor shall perform cyclical repainting of the warehouse portion at the same cycle as the office and related space. This cost, including the moving and returning of furnishings, as well as disassembly and reassembly of systems furniture per manufacturer's warranty, shall be at the Lessor's expense.

B. Carpet and flooring.

1. Except when damaged by the Government, the Lessor shall repair or replace flooring at any time during the Lease term when:
 - a. Backing or underlayment is exposed;
 - b. There are noticeable variations in surface color or texture;
 - c. It has curls, upturned edges, or other noticeable variations in texture;
 - d. Tiles are loose; or,
 - e. Tears or tripping hazards are present.
2. Notwithstanding the foregoing, as part of the rental consideration, the Lessor shall replace all carpet and base coving in the Space every **10** years, with a product which meets the requirements in the "Floor Coverings and Perimeters" paragraph in this Lease.
3. Repair or replacement shall include the moving and returning of furnishings, including disassembly and reassembly of systems furniture per manufacturer's warranty, if necessary. Work shall be performed after the normal hours established elsewhere in this Lease.
4. Warehouse Space Only: Except when damaged by the Government, Lessor shall reseal flooring in warehouse areas whenever there are noticeable variations in surface color or texture.

6.13 ASBESTOS ABATEMENT (OCT 2021)

If asbestos abatement work is to be performed in the Space after occupancy, the Lessor shall submit to the Government documentation that the abatement was done in accordance with OSHA, EPA, DOT, state and local regulations and that final clearance is achieved.

6.14 ONSITE LESSOR MANAGEMENT (APR 2011)

The Lessor shall provide an onsite Building superintendent or a locally designated representative available to promptly respond to deficiencies, and immediately address all emergency situations.

6.15 IDENTITY VERIFICATION OF PERSONNEL (OCT 2021)

LEASE NO. GS-08P-LUT00091, PAGE 41

DS
p

LESSOR:

DS
BTS

GOVERNMENT:

DS
mp

GSA TEMPLATE L100
REV (10/21)

A. The Government reserves the right to verify identities of personnel with routine and/or unaccompanied access to the Government's Space, including both pre and post occupancy periods. The Lessor shall comply with the agency personal identity verification requirements, identified in the CIO P 2181.1 GSA HSPD-12 Personal Identity Verification and Credentialing Handbook. The Lessor can find the CIO policy and additional information at [HTTP://WWW.GSA.GOV/HSPD12](http://www.gsa.gov/hspd12). This policy requires the Government to conduct background investigations and make HSPD-12 compliant suitability determinations for all persons with routine or unaccompanied access to Government leased Space. By definition, this includes at a minimum each employee of the Lessor, as well as employees of the Lessor's contractors or subcontractors who will provide building operating services requiring routine access to the Government's leased Space for a period greater than 6 months. The Government may also require this information for the Lessor's employees, contractors, or subcontractors who will be engaged to perform alterations or emergency repairs in the Government's Space.

B. Application Process: The background investigation will be done using the Government's prescribed process. The Lessor must provide information on each of their contractor/personnel meeting the above criteria to the Government, whereupon each identified contractor/personnel will be notified with instructions for completing the identity verification application within a given time frame. The application process will include completing supplemental information forms that must be inputted into the identity verification system in order for the application to be considered complete. Additionally, the Lessor must ensure prompt completion of the fingerprint process for their contractor/personnel. Email notifications will be sent with instructions on the steps to be taken to schedule an appointment for fingerprinting at an approved regional location along with instructions on how to complete the background investigation application.

C. The Lessor must ensure the Lease Contracting Officer (or the Lease Contracting Officer's designated representative) has all of the requested documentation timely to ensure the completion of the investigation.

D. Based on the information furnished, the Government will conduct background investigations. The Lease Contracting Officer will advise the Lessor in writing if a person fails the investigation, and, effective immediately, that person will no longer be allowed to work or be assigned to work in the Government's Space.

E. Throughout the life of the Lease, the Lessor shall provide the same data for any new employees, contractors, or subcontractors who will be assigned to the Government's Space in accordance with the above criteria. In the event the Lessor's contractor or subcontractor is subsequently replaced, the new contractor or subcontractor is not required to have persons re-apply who were cleared through this process while associated with the former contractor or subcontractor in accordance with GSA policy. The Lessor shall require each cleared person to re-apply and obtain a new clearance in accordance with GSA policy.

F. The Lessor is accountable for not allowing contractors to start work without the successful completion of the appropriate background investigation as required by GSA policy.

G. Access Card Retrieval/Return: Upon an Entry on Duty notification, the Government will issue a Personal Identity Verification (PIV) credential that is sometimes referred to as a GSA Access card. Lessors are responsible for all PIV credential issued to their contractors/personnel pursuant to this Lease. Lessors are specifically responsible for ensuring that all GSA PIV access cards are returned to the Lease Contracting Officer or their designee whenever their employees or a contractor no longer require access to the Space (such as When no longer needed for contract performance, upon completion of the Contractor employee's employment, and upon contract completion or termination). Additionally, the Lessor must notify the Lease Contracting Officer or their designee whenever a GSA PIV Access card is lost or stolen in which event the Lessor may be responsible for reimbursing the Government for replacement credentials at the current cost per PIV HSPD12 credential. Unreturned PIV Access cards will be considered as lost or stolen cards.

H. The Government reserves the right to conduct additional background checks on Lessor personnel and contractors with routine access to Government leased Space throughout the term of the Lease to determine who may have access to the Premises.

I. The Lease Contracting Officer may delay final payment under a contract if the Contractor fails to comply with these requirements.

J. The Lessor shall insert this paragraph in all subcontracts when the subcontractor is required to have physical access to a federally controlled facility or access to a federal information system.

6.16 SCHEDULE OF PERIODIC SERVICES (OCT 2020)

Upon acceptance of the Space, the Lessor shall provide the LCO with a detailed written schedule of all periodic services and maintenance to be performed other than daily, weekly, or monthly.

6.17 LANDSCAPING (OCT 2019)

A. For leases 10,000 RSF or greater where the Government is the sole occupant of the building, the Lessor shall use landscaping products that meet applicable, statutory, environmentally preferable criteria related to recycled content as outlined under the Green Procurement Compilation at [HTTPS://SFTOOL/GREENPROCUREMENT](https://sftool/greenprocurement) AND [HTTPS://SFTOOL.GOV/GREENPROCUREMENT/GREEN-PRODUCTS/6/LANDSCAPING-PRODUCTS/0](https://sftool.gov/greenprocurement/green-products/6/landscaping-products/0).

B. Landscape management practices shall prevent pollution by:

1. Employing practices which avoid or minimize the need for herbicides, fertilizers and pesticides; and
2. Composting/recycling all yard waste.

C. For leases 10,000 RSF or greater, if the Lessor satisfies performance of this Lease by new construction, and where conditions permit, the site shall be landscaped for low maintenance and water conservation with plants that are either native or well-adapted to local growing conditions.

DS
p

DS
BTS

DS
mp

6.18 LANDSCAPE MAINTENANCE (APR 2011)

Landscape maintenance shall be performed during the growing season at not less than a weekly cycle and shall consist of watering, weeding, mowing, and policing the area to keep it free of debris. Pruning and fertilization shall be done on an as-needed basis. In addition, dead, dying, or damaged plants shall be replaced.

6.19 RECYCLING (OCT 2021)

A. For Leases greater than 10,000 rentable SF or greater, with a Lease term greater than six months, the Lessor shall establish a recycling program for (at a minimum) paper, corrugated cardboard, glass, plastics, and metals where local markets for recovered materials exist.

B. Where state or local law, code, or ordinance requires recycling programs for the Premises, Lessor shall comply with such state and/or local law, code, or ordinance.

C. When implementing any recycling program, the Lessor shall provide an easily accessible, appropriately sized area (2 SF per 1,000 SF of Building gross floor area) that serves the Space for the collection and storage of materials for recycling. Telecom rooms are not acceptable as recycling space. During the Lease term, the Lessor agrees, upon request, to provide the Government with additional information concerning recycling programs maintained in the Building and in the Space.

D. For leases 10,000 rentable SF or greater, the Lessor shall submit a Building recycling service plan with floor plans annotating recycling area(s) as part of DIDs, if applicable, to be reflected on the CD submission.

6.20 RANDOLPH-SHEPPARD COMPLIANCE (SEP 2013)

During the term of the Lease, the Lessor may not establish vending facilities within the leased Space that will compete with any Randolph-Sheppard vending facilities.

6.21 SAFEGUARDING AND DISSEMINATION OF CONTROLLED UNCLASSIFIED INFORMATION (CUI) BUILDING INFORMATION (FEB 2020)

This clause applies to all recipients of CUI building information (which falls within the CUI Physical Security category), including offerors, bidders, awardees, contractors, subcontractors, lessors, suppliers and manufacturers.

Marking CUI. Contractors must submit any contractor-generated documents that contain building information to GSA for review and identification of any CUI building information that may be included. In addition, any documents GSA identifies as containing CUI building information must be marked in accordance with the Order and the Marking Controlled Unclassified Information Handbook (the current version may be found at <https://www.archives.gov/files/cui/20161206-cui-marking-handbook-v1-1.pdf>) before the original or any copies are disseminated to any other parties. If CUI content is identified, the CO may direct the contractor, as specified elsewhere in this contract, to imprint or affix CUI document markings (CUI) to the original documents and all copies, before any dissemination, or authorized GSA employees may mark the documents.

1. Authorized recipients.

- a. Building information designated as CUI must be protected with access strictly controlled and limited to those individuals having a Lawful Government Purpose to access such information, as defined in 32 C.F.R. § 2002.4(bb). Those with such a Lawful Government Purpose may include Federal, state and local government entities, and non-governmental entities engaged in the conduct of business on behalf of or with GSA. Non-governmental entities may include architects, engineers, consultants, contractors, subcontractors, suppliers, utilities, and others submitting an offer or bid to GSA, or performing work under a GSA contract or subcontract. Recipient contractors must be registered as "active" in the System for Award Management (SAM) database at www.sam.gov, and have a Lawful Government Purpose to access such information. If a subcontractor is not registered in the SAM database and has a Lawful Government Purpose to possess CUI building information in furtherance of the contract, the subcontractor must provide to the contractor its DUNS number or its tax ID number and a copy of its business license. The contractor must keep this information related to the subcontractor for the duration of the contract and subcontract.
- b. All GSA personnel and contractors must be provided CUI building information when needed for the performance of official Federal, state, and local government functions, such as for code compliance reviews and the issuance of building permits. Public safety entities such as fire and utility departments may have a Lawful Government Purpose to access CUI building information on a case-by-case basis. This clause must not prevent or encumber the necessary dissemination of CUI building information to public safety entities.

2. Dissemination of CUI building information:

- a. By electronic transmission. Electronic transmission of CUI information outside of the GSA network must use session encryption (or alternatively, file encryption) consistent with National Institute of Standards and Technology (NIST) SP 800-171. Encryption must be through an approved NIST algorithm with a valid certification, such as Advanced Encryption Standard or Triple Data Encryption Standard, in accordance with Federal Information Processing Standards Publication 140-2, Security Requirements for Cryptographic Modules, as required by GSA policy.
- b. By nonelectronic form or on portable electronic data storage devices. Portable electronic data storage devices include CDs, DVDs, and USB drives. Nonelectronic forms of CUI building information include paper documents, photographs, and film, among other formats.
 - i. By mail. Contractors must only use methods of shipping that provide services for monitoring receipt such as track and confirm, proof of delivery, signature confirmation, or return receipt.
 - ii. In person. Contractors must provide CUI building information only to authorized recipients with a Lawful Government Purpose to access such information. Further information on authorized recipients is found in section 1 of this clause.

3. Record keeping. Contractors must maintain a list of all entities to which CUI is disseminated, in accordance with sections 2 and 3 of this clause. This list must include, at a minimum:

- 1) The name of the state, Federal, or local government entity, utility, or firm to which CUI has been disseminated;
- 2) The name of the individual at the entity or firm who is responsible for protecting CUI building information, with access strictly controlled

- and limited to those individuals having a Lawful Government Purpose to access such information;
- 3) Contact information for the named individual; and
 - 4) A description of the CUI building information provided.

Once "as built" drawings are submitted, the contractor must collect all lists maintained in accordance with this clause, including those maintained by any subcontractors and suppliers, and submit them to the CO. For Federal buildings, final payment may be withheld until the lists are received.

4. Safeguarding CUI documents. CUI building information (both electronic and paper formats) must be stored within controlled environments that prevent unauthorized access. GSA contractors and subcontractors must not take CUI building information outside of GSA or their own facilities or network, except as necessary for the performance of that contract. Access to the information must be limited to those with a Lawful Government Purpose for access.
5. Destroying CUI building information. When no longer needed, CUI building information must either be returned to the CO or destroyed in accordance with guidelines in NIST Special Publication 800-88, Guidelines for Media Sanitization.
6. Notice of disposal. The contractor must notify the CO that all CUI building information has been returned or destroyed by the contractor and its subcontractors or suppliers in accordance with paragraphs 4 and 5 of this clause, with the exception of the contractor's record copy. This notice must be submitted to the CO at the completion of the contract to receive final payment. For leases, this notice must be submitted to the CO at the completion of the lease term.
7. CUI security incidents. All improper disclosures or receipt of CUI building information must be immediately reported to the CO and the GSA Incident Response Team Center at gsa-ir@gsa.gov. If the contract provides for progress payments, the CO may withhold approval of progress payments until the contractor provides a corrective action plan explaining how the contractor will prevent future improper disclosures of CUI building information. Progress payments may also be withheld for failure to comply with any provision in this clause until the contractor provides a corrective action plan explaining how the contractor will rectify any noncompliance and comply with the clause in the future.
8. Subcontracts. The contractor and subcontractors must insert the substance of this clause in all subcontracts.

6.22 INDOOR AIR QUALITY (OCT 2019)

A. The Lessor shall control airborne contaminants at the source and/or operate the Space in such a manner that indoor air quality action limits identified in the PBS Desk Guide for Indoor Air Quality Management (Companion to GSA Order PBS 1000.8), OSHA regulatory limits, and generally accepted consensus standards are not exceeded.

B. The Lessor shall avoid the use of products containing toxic, hazardous, carcinogenic, flammable, or corrosive ingredients as determined from the product label or manufacturer's safety data sheet. The Lessor shall use available odor-free or low odor products when applying paints, glues, lubricants, and similar wet products. When such equivalent products are not available, lessor shall use the alternate products outside normal working hours. Except in an emergency, the Lessor shall provide at least 72 hours advance notice to the Government before applying chemicals or products with noticeable odors in occupied Spaces and shall adequately ventilate those Spaces during and after application.

C. The Lessor shall serve as first responder to any occupant complaints about indoor air quality (IAQ). The Lessor shall promptly investigate such complaints and implement the necessary controls to address each complaint. Investigations shall include testing as needed, to ascertain the source and severity of the complaint.

D. The Government reserves the right to conduct independent IAQ assessments and detailed studies in Space that it occupies, as well as in space serving the Space (e.g., common use areas, mechanical rooms, HVAC systems, etc.). The Lessor shall assist the Government in its assessments and detailed studies by:

1. Making available information on Building operations and Lessor activities;
2. Providing access to Space for assessment and testing, if required; and
3. Implementing corrective measures required by the LCO. The Lessor shall take corrective action to correct any tests or measurements that do not meet GSA policy action limits in the PBS Desk Guide for Indoor Air Quality Management (Companion to GSA Order PBS 1000.8), OSHA regulatory limits, and generally accepted consensus standards.

E. The Lessor shall provide to the Government safety data sheets (SDS) upon request for the following products prior to their use during the term of the Lease: adhesives, caulking, sealants, insulating materials, fireproofing or firestopping materials, paints, carpets, floor and wall patching or leveling materials, lubricants, clear finish for wood surfaces, janitorial cleaning products, pesticides, rodenticides, and herbicides. The Government reserves the right to review such products used by the Lessor within the Space, common building areas, ventilation systems and zones serving the Space, and the area above suspended ceilings and engineering space in the same ventilation zone as the Space.

F. The Lessor shall use high efficiency (HEPA) filtration vacuums for cleaning and minimum MERV 10 rated ventilation system filtration whenever feasible.

G. The Lessor is encouraged to comply with best practices outlined in Appendix D- Indoor Air Quality in GSA Leased Facilities (Best Practices) within the PBS Desk Guide for Indoor Air Quality Management (Companion to GSA Order PBS 1000.8).

6.23 RADON IN AIR (OCT 2016)

If Space planned for occupancy by the Government is on the second floor above grade or lower, the Lessor shall, prior to occupancy, test the leased Space for 2 days to 3 days using charcoal canisters. The Lessor is responsible to provide Space in which radon levels in air are below the GSA action levels of 4 picoCuries

per liter (pCi/L) for childcare and 25 pCi/L for all other space. After the initial testing, a follow-up test for a minimum of 90 days using alpha track detectors shall be completed. For further information on radon, go to: [HTTPS://WWW.EPA.GOV/RADON](https://www.epa.gov/radon).

6.24 RADON IN WATER (JUN 2012)

- A. If the water source is not from a public utility, the Lessor shall demonstrate that water provided to the Premises is in compliance with EPA requirements and shall submit certification to the LCO prior to the Government occupying the Space.
- B. If the EPA action level is reached or exceeded, the Lessor shall institute appropriate abatement methods which reduce the radon levels to below this action.

6.25 HAZARDOUS MATERIALS (SEP 2013)

- A. The leased Space shall be free of hazardous materials, hazardous substances, and hazardous wastes, as defined by and according to applicable Federal, state, and local environmental regulations. Should there be reason to suspect otherwise, the Government reserves the right, at Lessor's expense, to require documentation or testing to confirm that the Space is free of all hazardous materials.
- B. Lessor shall, to the extent of its knowledge, notify Government of the introduction of any hazardous materials onto the Property by Lessor or others, including but not limited to, co-tenants occupying Space in the Building.
- C. All hazardous materials stored in the Space must be kept and maintained according to applicable Federal, State, and local environmental regulations. The Government will notify Lessor of any hazardous materials it will store in the Space

6.26 MOLD (OCT 2021)

- A. Actionable mold is either visible mold or airborne mold of types and concentrations in excess of that found in the local outdoor air or non-problematic control areas elsewhere in the same building, whichever is lower. The Lessor shall safely remediate all actionable mold in accordance with sub-paragraph C below.
- B. The Lessor shall provide Space to the Government that is free from ongoing water leaks or moisture infiltration. The Space and ventilation zones serving the Space shall also be free of actionable mold.
- C. Within 48 hours following a flood, plumbing leak or heavy rain whereby the Government Space or air zones serving the Space may have become moisture damaged, the Lessor shall repair any leakage sources and remediate the moisture damage. Whenever moisture damage or infiltration persists such that: mold is visible, mold odors are present, or occupants register complaints about mold, the Lessor shall employ a board-certified industrial hygienist to inspect and evaluate the Space and air zones serving the Space for visible and/or actionable mold presence; inspection shall take place as soon as possible but no later than 15 calendar days following identification of a potential mold issue as described above. Notwithstanding the above, when a board-certified industrial hygienist is not available to perform this inspection, the Lessor may, upon written request and the Government's approval, employ an environmental consultant experienced in mold assessment. The Lessor shall promptly furnish the mold report to the Government. After all leaks have been identified and corrected, the Lessor shall safely remediate all visible moldy and/or water damaged materials identified by the consultant using a qualified remediation contractor following the methods identified in "Mold Remediation in Schools and Commercial Buildings" (EPA 402-K-01-001, September 2008 or ANSI/IICRC S520-2015: Standard for Professional Mold Remediation) and all applicable state laws pertaining to mold remediation practices. Remediation shall also remove actionable mold levels. Remediation shall be completed within a time frame acceptable to the Lease Contracting Officer which shall be no later than 90 calendar days following confirmation of the presence of actionable mold.
- D. The presence of actionable mold in the Premises may be treated as a Casualty, as determined by the Government, in accordance with the Fire and Other Casualty clause contained in the General Clauses of this Lease. In addition to the provisions of the Fire and Other Casualty clause of this Lease, should a portion of the Premises be determined by the Government to be un-tenantable due to an act of negligence by the Lessor or his agents, the Lessor shall provide reasonably acceptable alternative Space at the Lessor's expense, including the cost of moving, and any required alterations.

6.27 OCCUPANT EMERGENCY PLANS (OCT 2020)

The Lessor is required to cooperate, participate, and comply with the development and implementation of the Government's Occupant Emergency Plan (OEP) and a supplemental Shelter-in Place (SIP) Plan. Periodically, the Government may request that the Lessor assist in reviewing and revising its OEP and SIP. The Plan, among other things, will include evacuation procedures and an annual emergency evacuation drill, emergency shutdown of air intake procedures, and emergency notification procedures for the Lessor's Building engineer or manager, Building security, local emergency personnel, and Government agency personnel.

6.28 FLAG DISPLAY (OCT 2016)

If the Lessor has supplied a flagpole on the Property as a requirement of this Lease, the Lessor shall be responsible for flag display on all workdays and Federal holidays. The Lessor may illuminate the flag in lieu of raising and lowering the flag daily. The Lessor shall register with the Federal Protective Service (FPS) MegaCenter in order to receive notifications regarding when flags shall be flown at half-staff, as determined by Executive Order.

DS
p

DS
BTS

DS
mp

7 ADDITIONAL TERMS AND CONDITIONS

7.01 SECURITY REQUIREMENTS (OCT 2021)

The Lessor agrees to the requirements of Federal Security Level II attached to this Lease.

7.02 MODIFIED LEASE PARAGRAPHS (OCT 2016)

The following paragraphs have been modified in this Lease:

- 1.01 THE PREMISES (OCT 2016)
- 1.03 TRUCK TURNING RADIUS REQUIREMENT (MAY 2014)
- 1.04 CLEAR CEILING HEIGHT REQUIREMENTS (MAY 2014)
- 1.05 WAREHOUSE BAY WIDTH, BAY DEPTH, AND COLUMN SPACING REQUIREMENTS (MAY 2014)
- 1.06 RENT AND OTHER CONSIDERATION (OCT 2021)
- 1.10 DOCUMENTS INCORPORATED IN THE LEASE (OCT 2021)
- 2.01 DEFINITIONS AND GENERAL TERMS (OCT 2016)
- 3.12 AUTOMATIC FIRE SPRINKLER SYSTEM (SEP 2013)
- 3.13 FIRE ALARM SYSTEM (SEP 2013)
- 3.20 CEILINGS (OCT 2019)
- 3.29 FLOORS AND FLOOR LOAD (OCT 2019)
- 3.30 FLOORS AND FLOOR LOAD (OCT 2019)
- 3.31 FLOOR COVERING AND PERIMETERS – SHELL (SEP 2013)
- 3.34 ELECTRICAL (OCT 2019)
- 3.41 HEATING, VENTILATION, AND AIR CONDITIONING – SHELL (OCT 2021)
- 3.44 LIGHTING: INTERIOR AND PARKING – SHELL (OCT 2020)
- 3.55 DUMPSTER ENCLOSURE & SERVICES
- 4.01 SCHEDULE FOR COMPLETION OF SPACE (OCT 2020)
- 5.19 LIGHTING: INTERIOR AND PARKING – TI (SEP 2015)
- 6.01 PROVISION OF SERVICES, ACCESS AND NORMAL HOURS (JUN 2012)
- 6.05 HEATING AND AIR CONDITIONING (OCT 2020)
- 6.11 MAINTENANCE AND TESTING OF SYSTEMS (OCT 2021)
- 6.12 MAINTENANCE OF PROVIDED FINISHES (OCT 2021)
- 6.25 HAZARDOUS MATERIALS (SEP 2013)

7.03 ~~ADDENDUM TO GSA FORM 3517B, GENERAL CLAUSES, NO FEDERALLY ELECTED OFFICIALS TO BENEFIT (OCT 2018)~~ INTENTIONALLY DELETED

7.04 ~~DAILY OCCUPANCY DATA (OCT 2021)~~ INTENTIONALLY DELETED

7.05 PROVISIONAL ACCEPTANCE (FEB 2021)

A. At a time of exceptional circumstance, i.e., pandemic, the Government may accept the Space on a provisional basis until such time that a re-inspection on-site can occur. In this instance and upon request from the LCO, the Lessor shall provide such documentation (e.g., picture(s), video(s) and/or a representative on-site for a live-stream or 'virtual' walkthrough) to confirm substantial completion. In such an instance the Government may withhold a percentage of lump sum Tenant Improvement payment as a reserve to ensure that all deficiencies and/or punch list item(s) will be addressed by the Lessor within the time frame established or until the Government can determine the space has been delivered in accordance with the Lease requirements, Design Intent Drawings and Construction Drawings.

B. At such time as a physical on-site inspection is deemed possible by the Government, the Government reserves the right to physically inspect the Space with an on-site representative to conduct a space measurement and to document any deficiencies and/or punch-list item(s) for the Lessor's correction.

C. Upon re-inspection and Government acceptance of any deficiencies and/or punch list item(s) documented per above, or in the instance of no such documented items, this provisional acceptance will be rendered non-provisional and fully accepted by the Government via subsequent Lease Amendment.

OFFICE REQUIREMENTS

7.06 SECURITY STANDARDS (JUN 2012)

The Lessor agrees to the requirements of Security Level II attached to this Lease.

7.07 EFFICIENCY OF LAYOUT-TEST FIT

LEASE NO. GS-08P-LUT00091, PAGE 46

LESSOR:

GOVERNMENT:

DS
p

DS
BTS

DS
mp

GSA TEMPLATE L100
REV (10/21)

BLM requires all Offerors to submit test fits and site plans included in all offers.

7.08 COLUMN SPACING

Column spacing within the office space shall not impede the government's efficient layout of agency provided systems furniture. The column spacing within the warehouse shall not impede with the efficiency of bay and work areas.

7.09 PROHIBITED EXTERNAL ADJACENCIES

Offered buildings should not be located adjacent to schools, residential areas, prisons/jails, heavy industrial areas (light industrial or flex space areas are acceptable), or any operations causing excessive odors or noise.

7.10 AREA OF CONSIDERATION

Property must be capable of sending and receiving radio transmissions from Black Rock Mountain. The government shall determine if adequate strength is available through on-site inspection.

7.11 AMOUNT AND TYPE OF SPACE

Preferred office space must be located on the ground floor in a quality building of sound and substantial construction. The preferred warehouse space must be attached to the office area. Where the warehouse cannot be attached to the office area, the warehouse must be on the site plan. All warehouse overhead doors should open directly into the wareyard area.

7.12 SITE REQUIREMENTS

Site must have underground city utilities (electricity, gas, water, sewer, and telecommunication facilities capable of supporting DS1 service). The site must have immediate and safe access to principal and minor arterial roads. In addition, the site must provide public visibility and easy access to arterials that service the public lands and other major arterials in the area. Areas which are not acceptable as sites for this facility are areas with known past or present contamination by hazardous waste materials and any site which is located in a predominately industrial, residential or school area. The site must be large enough and configured in such a way as to provide efficient, convenient and flexible use of the site. Consideration should be given to the proximity of amenities available in the area such as public transportation, bike and foot paths and eating facilities.

7.13 WINDOWS

All windows shall be, or made to be, non-operable.

7.14 LEED

IF LEED IS REQUIRED FOR THE FACILITY, LEED Point Requirement: 50% or more of the total LEED Points must be energy & water related.

7.15 UTILITIES SEPARATE FROM RENTAL/BUILDING OPERATING PLAN

The Government will pay for all electric and gas utilities directly to the utility companies throughout the term of the lease, separately metered.

7.16 ROOF DESIGN

In areas subject to heavy snowfall the Lessor shall ensure employees, visitors, and pedestrians are safe from snow falling from the roof.

7.18 SNOW REMOVAL STORAGE

Adequate snow removal storage area shall be located within the wareyard. Snow removal storage shall be identified on the site plan and is over and above the BLM minimum requirement.


7.19 BUILDING IDENTIFICATION

Lessor shall provide and install a sign base for a Government provided, Lessor installed, graphic (logo) identification sign. The dimensions of the base are approximately eight (8) feet long by twenty-four (24) inches high. The sign must be lighted, controlled with a photocell control system, visible in both directions from the contiguous streets, and be placed at or near the front of the main building entrance. The building identification sign shall be designed as an architectural element permanently built using masonry or other materials which complement the building. The street numbers shall be posted at the building entrance to facilitate building identification by emergency and delivery personnel. The Leasing Contracting Officer must approve the sign base.

DS
P

DS
BTS

DS
MP

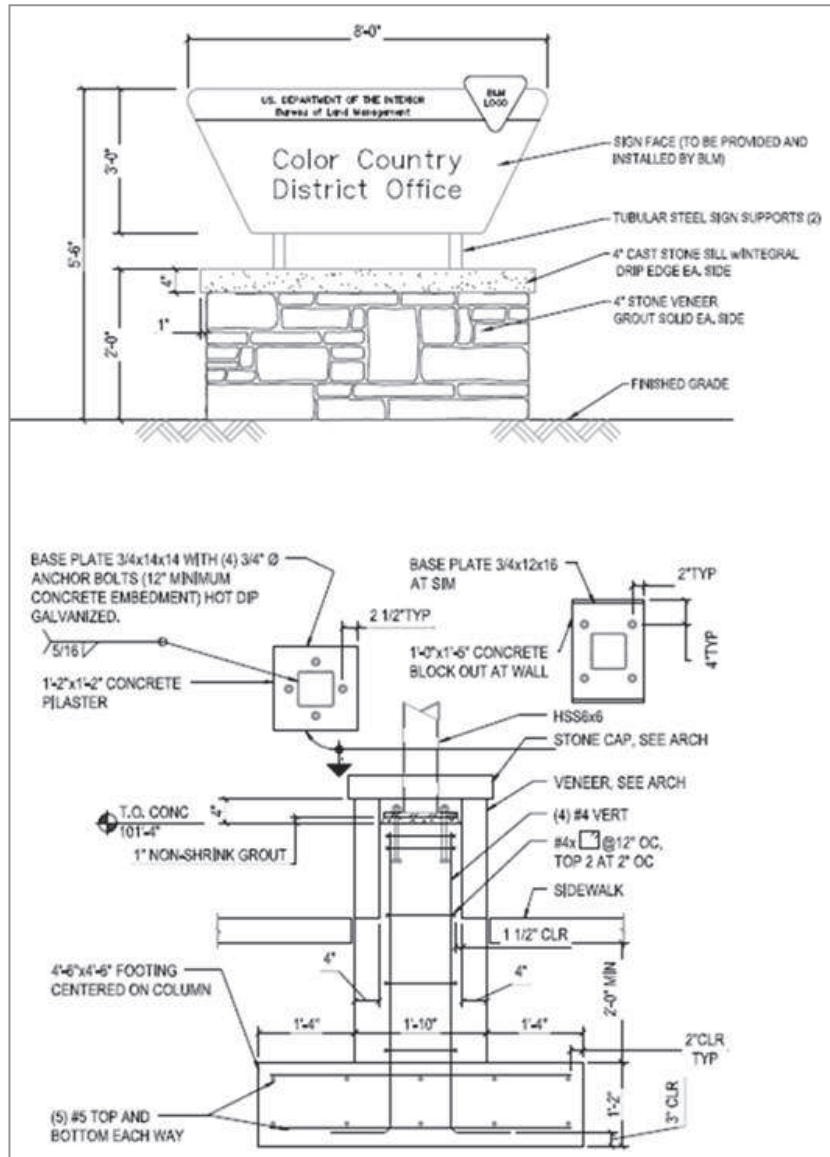

WAREHOUSE REQUIREMENTS

7.20 WAREHOUSE REQUIREMENTS

- A. All warehouse space will be ground level.
- B. Prefer warehouse to be attached to the office area and constructed with a two (2) hour fire wall separation.
- C. A clear span is preferred in the Warehouse space. If columns are necessary, they must not interfere with the operation of the warehouse functions.
- D. Ceiling shall be insulated.
- E. A minimum lighting level of thirty (30) foot-candles measured at floor level is required. No more than one-third (1/3) of the lights shall be controlled by any one (1) light switch. Three (3) way or four (4) way light switches are required so all lights will be controlled and shall be located next to each personnel door.
- F. Provide and install two (2) three (3) foot wide steel insulated exterior personnel doors with concrete apron (with a two (2) percent slope for adequate drainage) to exit the warehouse.
1. Doors shall be equipped with four (4) inch by two (2) foot four (24) inch R-15 insulated forty-eight (48) inches above the finished floor.

2. Metal kick plates twenty-four (24) inches high by thirty-six (36) inches wide shall be provided and installed on both sides of the doors.
3. All exterior warehouse personnel doors require PACS Readers (BSAC); mounted fifty-four (54) inches above ground level on the door handle side of the exterior of the building.
4. All doors shall be equipped with automatic door closer hardware.
5. Above all exterior personnel doors provide and install a window as wide as the door and a minimum of forty-eight (48) inches in height.

7.21 OVERHEAD DOORS (SHELL)

For each bay the Lessor is to provide and install a sectional overhead warehouse door as a Shell Expense.

- A. Door 1 Width fourteen (14) feet zero (00) inches; Height fourteen (14) feet zero (00) inches.
- B. Door 2 Width fourteen (14) feet zero (00) inches; Height fourteen (14) feet zero (00) inches
- C. Door 3 Width fourteen (14) feet zero (00) inches; Height fourteen (14) feet zero (00) inches.
- D. Provide and install sectional overhead doors at bay entrance.
 1. Each door must be a complete unit produced by (1) one manufacturer, including frames, section, brackets, guides, tracks, counterbalance, mechanism, hardware, operators, and installation accessories, to suit openings and head room allowable.
 2. Doors must be capable of being operated both manually and electrically and have interior lockable controls.
 3. Each door must be constructed of steel or fiberglass panels of a quality meeting heavy duty commercial standards and insulated to prevent energy loss.

7.22 CONCRETE APRON

For each bay, the Lessor is to provide and install at each overhead door a concrete apron a minimum of twelve (12) feet in depth along the entire exterior length of the overhead door(s) area, including the personnel door, sloped two (2) percent to drain, with a live load capacity of two hundred fifty (250) psf. All overhead doors shall open directly into wareyard area.

WAREYARD REQUIREMENTS

7.23 DRAINAGE, SWALES, DETENTION PONDS

The Lessor shall provide all square feet required for site drainage swales or detention ponds. This square footage shall be over and above the BLM minimum requirement.

7.24 WAREYARD ACCESS

Access to the wareyard area will be achieved by two means of convenient ingress and egress capable of providing sufficient maneuvering radius to accommodate standard semi-truck with a fifty-three (53) foot trailer.

7.25 WAREYARD LIGHTING (SHELL)

Lessor shall provide and install lighting throughout wareyard to evenly provide one (1) foot candle lighting when measured at ground level, with LED lights controlled with programmable photocells. Careful consideration must be given to placement of exterior light poles. When possible they must be located at perimeters of the property but shall not be placed in such a manner, they would facilitate intruder entry over the fence. If light poles must be placed within the wareyard, they shall be mounted on a reinforced concrete base with a minimum diameter of twenty-four (24) inches, which extends a minimum of thirty-six (36) inches above grade and sixty (60) inches below grade.

7.26 WAREYARD PAVING (SHELL)

Wareyard paving shall be designed in accordance with all geotechnical recommendations based on existing soil conditions and anticipated trip counts and vehicle loads. BLM shall provide Offeror with trip and vehicle load tables.

- A. Wareyard and all accesses from public roads must be surfaced to the following guidelines:

This work consists of the design and construction of asphalt parking lots for Government offices and facilities, including wareyards. It is separate and distinct from paving of roads, highways and streets. The work includes soil investigation; engineering design for pavement thickness and grading/drainage; preliminary layout staking; topsoil stripping; treatment or removal of weak or unsuitable sub grade soils; installation of underground drainage piping and other utilities; final staking; installation of Compacted Aggregate Base (CAB) courses; installation of Hot Mix Asphalt (HMA) paving course; and final striping of parking stalls and traffic control markings of access and drives.

- B. Lessor shall maintain all parking areas
1. Parking Stripes in Wareyard - In addition to the initial painting (striping) of all parking spaces, the Lessor will be responsible for periodic painting over the term of the lease. At a minimum, all parking stripes will be re-painted once every five (5) years.
 2. Each parking space located adjacent to fencing must be provided with a concrete wheel stop to prevent damage to the fence.
 3. In a single tenant building, each visitor, handicapped, or employee parking space near the front entrance of the building must be provided with a concrete wheel stop to prevent damage to the front entrance.
- C. Floor loading in warehouse and pavement section in wareyard shall be determined by the Lessor based on following vehicle weights and trip data.

7.27 GROUND SURFACE FINISHES WITHIN THE WAREYARD AREA:

Lessor shall provide and install the following ground surface finishes for the Lessor provided parking areas and parking structures and for Government owned and installed structures. Locations designated at layout:

Requirement	Parking Spaces	Ground Surface Finish	Live Load/ SF	Requires Electrical Service	Type of Service	Requires Water
Covered 3-Sided Parking Structure - 20' by 150'	16 Bays	Concrete	250	Yes	20 amp 120 volt Dedicated Circuit	No
Three (3) Flammable Storage Shed 12' by 22'	N/A	Concrete	250	Yes	20 amp 120 volt Dedicated Circuit	No
Concrete Pad for Stand Pipe Area 12' by 36'	N/A	Concrete	400	No	N/A	Yes

7.28 COVERED THREE (3) SIDED PARKING STRUCTURE (SHELL)

Lessor shall provide and install:

- A. A covered three (3) sided parking structure in the wareyard: Exact location to be determined by the Government.
- B. The floor of this parking structure shall be concrete, capable of supporting two hundred fifty (250) pounds per square foot.
- C. The covered three (3) sided Parking Structure shall be twenty (20) feet deep by one hundred fifty (150) feet long with a twelve (12) foot minimum clear height.
- D. The structure shall have a concrete apron a minimum of twelve (10) feet wide along the entire exterior length of the open side of the structure.

7.29 CONCRETE PAD FOR GOVERNMENT-PROVIDED FLAMMABLE STORAGE SHED

- A. The Lessor shall provide and install:
1. A level twelve (12) foot by twenty-two (22) foot concrete pad to support three (3) flammable storage shed to be provided and installed by the Government.
 2. The pad must be located so that it does not interfere with other structures or impede maneuvering of vehicles within the wareyard. Specific location will be shown on the final approved layout drawings.

GROUNDING AND BONDING REQUIREMENTS

7.30 SECTION 1 - BUILDING GROUNDING AND BONDING REQUIREMENTS

- A. Lessor shall coordinate with the local electrical utility company to install commercial electrical power service wiring and electrical SERVICE-ENTRANCE EQUIPMENT TO THE BUILDING IN COMPLIANCE WITH NFPA 70.
- B. Lessor shall provide, install, and place into satisfactory and successful operation all materials, devices, and necessary appurtenances to provide a complete, permanent, common, grounding and bonding infrastructure for the building and the telecommunications backbone pathways.
1. The Grounding and Bonding system shall support an ANSI/TIA/EIA and ISO/IEC compliant communications Structured Cabling System (SCS).
 2. The work shall include materials, equipment, and apparatus not specifically mentioned herein or noted on the plans, but which are necessary to make a compliant grounding and bonding system.

C. Lessor shall provide and install, and place into satisfactory and successful operation applicable utilities, surge protection, belowground pathways, grounding systems for radio and dispatch communications systems, radio equipment rooms, electrical systems, antenna masts, RF cable entrance panels, ground bus bars, tower foundations, tower grounding systems, shelter foundations, and shelter grounding systems.

3. The Grounding and Bonding system shall support a Motorola R-56 compliant radio system and dispatch center.
4. The work shall include materials, equipment, and apparatus not specifically mentioned herein or noted on the plans but which are necessary to make a compliant grounding and bonding system.

D. Building Shell: Lessor shall provide and install the electrical, grounding systems and pathways as detailed below.

1. SUMMARY

- a. The primary objective of this standard is to provide guidance and requirements for installation of electrical systems, grounding systems and bonding of telecommunications pathways and facilities as it relates to the field office building, telecommunications infrastructure. Electrical pathways, grounding, and bonding specifications for the building are applicable to all building designs.
- b. Telecommunication infrastructure pathways, grounding, and bonding specifications are applicable to all building designs.
- c. Standards from this attachment applied to the principle office building and warehouse are considered building "Shell."
- d. Standards from this attachment applied to all other buildings on the premises are considered "Tenant Improvement."

2. SCOPE OF WORK

- a. In this specification, the terms "Contractor"," Building Owner", and Lessor are used interchangeably.
- b. The Government Contracting Officer shall mean the GSA Contracting Officer (CO).
- c. Tenant Agency means the BLM.
- d. The BLM Subcontractor shall mean a contractor performing work directly for the BLM.
- e. The Lessor shall coordinate with the local electrical utility company to install commercial electrical power service wiring and electrical service-entrance equipment to the building in compliance with NFPA 70 and NFPA 70E.
- f. The Lessor shall furnish, install, and place into satisfactory and successful operation all materials, devices, and necessary appurtenances to provide a complete, permanent, common, grounding and bonding infrastructure for the building and the telecommunications backbone pathways for the information technology (IT) network equipment room, computer room, telephone company cable entrance, IT network cabling, and the Telecommunications Bonding Backbone.
 - (1) The Grounding and Bonding system shall support an ANSI/TIA/EIA and ISO/IEC compliant communications Structured Cabling System (SCS).
 - (2) The work shall include materials, equipment, and apparatus not specifically mentioned herein or noted on the plans but which are necessary to make a compliant grounding and bonding system.
- g. The Lessor shall provide a building equipped with a common grounding electrode system in compliance NFPA 70, Article 250, Grounding and Bonding. This shall include, but not be limited to the following:
 - (1) Commercial electrical power system ground with surge protection.
 - (2) Telephone service entrance ground with surge protection.
 - (3) Telecommunication room(s) ground with surge protection on electrical subpanel.
 - (4) Grounding vertical structural building steel.
 - (5) Lightning protection system for principal office building and attached warehouse and/or garage. (where required by professional engineering performing the lightning risk assessment required by NFPA 780).
 - (6) Metal underground systems electrode. Metal underground piping systems (except gas), underground tanks (except gas), and underground metal well casings can serve as a grounding electrode.

3. REFERENCES

a. The applicable portions of the following specifications, standards, codes, and regulations shall be incorporated by reference into these specifications. The current version of each of the specifications, standards, codes, and regulations are listed. As they are reissued, the most current version of each is incorporated by reference into these specifications.

- (1) Electrical:
 - (a) NFPA 70: National Electrical Code (NEC), current edition 2014
 - (b) NFPA 780: Standard for the Installation of Lightning Protection Systems
 - (c) NFPA 70E: Standard for Electrical Safety in the Workplace
 - (d) Occupational Safety and Health Act (OSHA)
- (2) Lightning and Surge Protection:
 - (a) ANSI/UL 1449 – Standard for Safety for Surge Protective Devices, UL 1449, 3rd Edition.
 - (b) UL 96A – Installation Requirements for Lightning Protection Systems
 - (c) NFPA 70: National Electrical Code (NEC), current edition 2014
 - (d) NFPA 780: Standard for the Installation of Lightning Protection Systems
- (3) Telecommunications Cabling:
 - (a) ANSI/NECA/BICSI 568-2006: Standard for Installing Commercial Building Telecommunications Cabling.
 - (b) ANSI/TIA/EIA-568-B.1-2004 Part 1: General Requirements Commercial Building Telecommunications Cabling Standard.
 - (c) ANSI/TIA-569-B-2004: Commercial Building Standard for Telecommunications Pathways and Spaces.


- (d) TIA/EIA - 606: The Administration Standard for the Telecommunications Infrastructure of Commercial Buildings
 - (e) ANSI-J-STD-607-A-2002: Commercial Building Grounding and Bonding Requirements for Telecommunications
 - (f) ISO/IEC IS 11801: Generic Cabling for Customer Premises
 - (g) BICSI: BICSI Telecommunications Cabling Installation Manual
 - (h) BICSI: BICSI Telecommunications Distribution Methods Manual (TDMM)
- (4) Underwriters Laboratories®
- (a) UL 94 –Tests for Flammability of Plastic Materials for Parts in Devices and Appliances
 - (b) UL 467 – Grounding and Bonding Equipment
 - (c) UL 497 – Protectors for Paired-Conductor Communications Circuits

DS
p

DS
BTS

DS
mp

Basic Field Office Grounding and Pathways

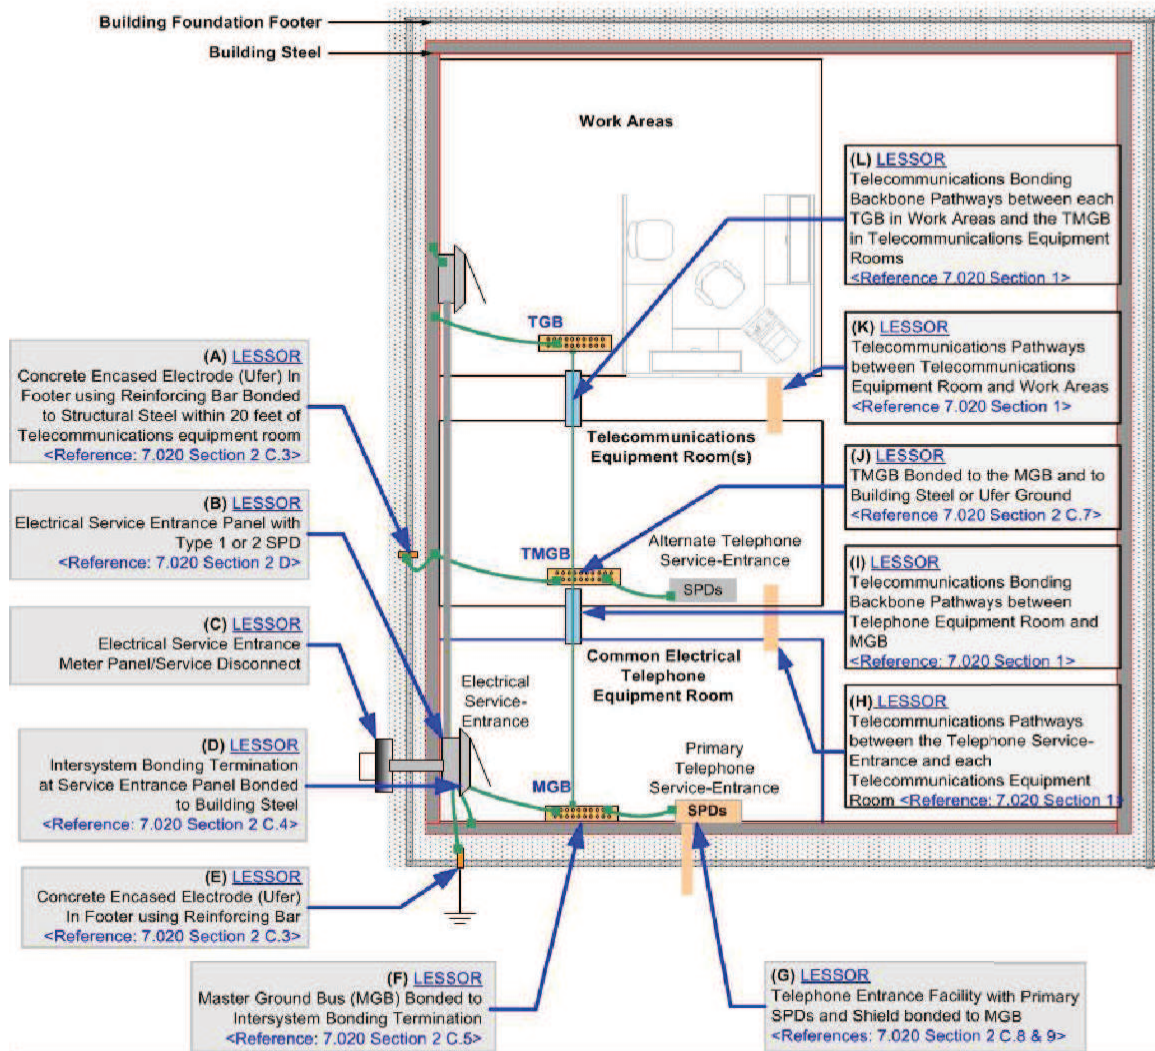

7.31 SECTION 2 - BUILDING GROUNDING AND BONDING REQUIREMENTS

A. GENERAL:

1. **NOTHING INCLUDED OR OMITTED IN THIS SPECIFICATION SHALL RELIEVE THE LESSOR OF THE OBLIGATION OF PROVIDING A COMPLETE, SATISFACTORY, AND FULLY functional electrical system, telecommunications infrastructure and grounding system inside the building.**
2. All work shall present a neat and finished appearance. Any changes in the design or method of installation of an item as specified shall be reviewed and approved by the Contracting Officer prior to installation.

B. GROUND RESISTANCE DESIGN

1. The final building grounding system shall be designed for an earth ground resistance of five (5) Ohms or less.
 - a. All grounding electrode conductors shall be #2 AWG or coarser, bare, solid, tinned copper.
 - b. All grounding electrode connections shall be made using exothermic welding or listed (UL 467 or equivalent) irreversible, high-compression crimp connectors.
 - c. The concrete encased electrode installed in the foundation footer of the building shall serve as the primary ground for the electrical system and common grounding throughout the building. Concrete-encased electrodes of existing buildings or structures shall not be required to be part of the grounding electrode system where the steel reinforcing bars, or rods are not accessible for use without disturbing the concrete.

C. GROUNDING AND BONDING REQUIREMENTS

1. Grounding electrodes, conductors, connection devices, and bus bars shall be listed (UL 467 or equivalent) and installed in compliance for the intended purpose.

2. The Lessor shall provide an occupied building equipped with a common grounding electrode system in compliance with NFPA70, Article 250, Grounding, and Bonding and NFPA 780, Article 4.14.1.
3. The Lessor shall furnish and install concrete encased electrodes in the footer of the building as an integral part of the buildings common grounding electrode system. (NFPA 70-2014, Article 250.52(c); and NFPA 780-2008, section 4.13.3) Concrete-encased electrodes of existing buildings or structures shall not be required to be part of the grounding electrode system where the steel reinforcing bars or rods are not accessible for use without disturbing the concrete.
4. The Lessor shall furnish and install an intersystem bonding termination (IBT) external to enclosures at the electrical service-entrance equipment or metering equipment enclosure and at the disconnecting means for any additional buildings or structures. (NFPA 70-2014, Article 250.94 - Bonding for Other Systems)
5. The Lessor shall provide a master ground bus bar (MGB) installed near the service equipment enclosure, meter enclosure, or raceway for service conductors bonded to the IBT.
6. The Lessor shall "effectively" bond vertical structural steel members to a concrete encased electrode in compliance with NFPA 70-2014, Article 250.52(A)(2)(2).
7. Lessor shall furnish and install a telecommunications master ground bus bar (TMGB) near the primary telecommunications service-entrance. The TMGB may be located in the primary telecommunications equipment room where the service-entrance is established separate from the electrical service entrance.
8. Lessor shall ground all incoming telecommunication cables, including paired-conductor and optical fiber cable at the telecommunications service-entrance.
9. Lessor shall ground primary surge protection devices (SPDs) for telephone circuits, data circuits, and control circuits to the MGB, TMGB or SSGB an equipment grounding conductor using listed grounding connectors.
10. Lessor shall furnish and install a telecommunications bonding backbone (TBB) in all buildings.
11. Lessor shall furnish and install a telecommunications ground bus bar (TGB) in each telecommunications equipment room located in the building and fed by the same electrical service.

D. SURGE PROTECTION DEVICE REQUIREMENTS

1. The Lessor shall design, furnish, and install Type 1 and/or Type 2 SPDs, in accordance with NFPA 780 – Standard for the Installation of Lightning Protection Systems. SPDs shall be installed at the following locations within the building:
 - a. The primary electrical service-entrance panel.
 - b. Subpanels supplying power to telecommunications equipment rooms.
2. Surge Protection Devices (SPDs) shall comply with UL 1449 - Standard for Safety for Surge Protective Devices, 3rd Edition.

E. LIGHTNING PROTECTION REQUIREMENTS

1. Lessor shall furnish and install lightning protection systems on the principle office building and attached warehouse or garage where exposure analysis requires a system to be installed.
2. If the Lessor determines that installation of a lightning protection system is not necessary, a written document prepared by a qualified engineer justifying why a lightning protection system is not necessary must be prepared and submitted to the Government Contracting Officer and the Tenant Agency.
 - a. This document must specifically address the exposure criteria provided below and include appropriate references, results from soil resistivity testing, and elevation measurements used to justify not installing a lightning protection system.
3. Lightning system materials shall comply with UL 96 and NFPA 780.

F. CONSTRUCTION DRAWING REVIEW

1. The Lessor shall provide three (3) copies of the construction drawings to the Government for review.
2. The designated tenant agency will review drawings and provide comments to GSA within seven (7) business days after receipt.
3. The Lessor shall correct deficiencies noted in the checklist prior to the final GSA acceptance inspection.

TABLE F-- DRAWING REVIEW

BUILDING LOCATION (Inspection Point)	Paragraph Reference	
Main Electrical Room (Electrical Service Entrance)	GSA Section 7	Pass/Fail N/A
Drawings show a Concrete Encased Electrode bonded to the Electrical Service-Entrance and a Master Ground Bus Bar (MGB) installed in the Main Electrical Room	7.020 Section 2 C.3	
Main Telecommunications Equipment Room (Telephone Company Service Entrance)	Type A	Pass/Fail N/A

DS
P

LESSOR:

DS
BTS

GOVERNMENT:

DS
MP

Drawings show a Concrete Encased Electrode or building steel grounding locations for the Telecommunications Master Ground Bus Bar (TMGB) in the main Telecommunications Equipment Room	7.020 Section 2 C.3 7.020 Section 2 C.7	
Vertical Structural Steel	Type A	Pass/Fail N/A
Drawings show Concrete Encased Electrode Connections and Installation (or) Reinforcement Bar Connections to vertical steel anchor bolts	7.020 Section 2 C.3	

INSPECTOR NAME	SITE NAME	INSPECTOR SIGNATURE	INSPECTION DATE

G. PHOTO INSPECTIONS

1. The Lessor shall provide digital photographs of all below grade construction to the Tenant Agency Representative Contracting Officer prior to backfill and concrete pours. Requirements for photographs are listed below:
 - a. Photographs shall be taken with a minimum 11-megapixel resolution.
 - b. Photographs shall be labeled, and time stamped for the date taken.
 - c. A measuring tape shall be included in photographs referencing all measurements specific to the requirements of the construction of the site. (e.g., ground rod electrode depth and distance from the building foundation).
 - d. Photographs shall be taken of all below grade work including, but not limited to, the following:
 - 1) Photographs shall be taken of each concrete encased electrode(s) installation location as identified in paragraphs 2.2.A.3 and 2.3 C.
 - (a) Photograph of tape measurement of each grounding electrode conductor or rebar section verifying minimum 20- foot length.
 - (b) Where reinforcing bar (rebar) is used as the grounding electrode, a photograph of each grounding pigtail connection to the rebar shall be provided.
 - (c) Photograph of tape measurement of each grounding pigtail length extending through the PVC conduit.
 - (d) Photographs of structural steel hold-down bolt connections to concrete encased electrodes located in the support footing or foundation. The hold-down bolts shall be connected to the concrete-encased electrode by welding, exothermic welding, the usual steel tie wires, or other approved means in compliance with NFPA 70-2014, Article 250.52(A)(2)(2).
2. The Lessor will overnight deliver electronic version of the photos to the designated Tenant Agency for review and comments within seven (7) business days.
3. The Lessor shall correct all deficiencies noted in Tenant Agency comments and on the checklist prior to the final acceptance by the tenant agency.

TABLE G - PHOTO INSPECTION POINTS

BUILDING LOCATION (Inspection Point)	Paragraph Reference	
Main Electrical Room (Electrical Service Entrance)	Building Shell	Pass/Fail N/A
Concrete Encased Electrode (Ufer)Pigtail Connections and Installation	7.020 Section 2 C.3	
Main Telecommunications Equipment Room (Telephone Company Service Entrance)	Building Shell	Pass/Fail N/A
Concrete Encased Electrode (Ufer)Pigtail Connections and Installation	7.020 Section 2 C.3	
Vertical Structural Steel	Building Shell	Pass/Fail N/A
Concrete Encased Electrode (Ufer)Pigtail Connections and Installation (or) Reinforcement Bar Connections to Anchor Bolts	7.020 Section 2 C.3	
INSPECTOR NAME	SITE NAME	INSPECTOR SIGNATURE

H. PHYSICAL ON-SITE INSPECTIONS

The Lessor shall notify the Tenant Agency two weeks prior to the request for electrical final inspection.

1. The Tenant Agency will schedule an "on-site" inspection with the Lessor's Construction Supervisor prior to the electrical final inspection.
 2. The Tenant Agency will provide the Lessor's Construction Supervisor with written comments of inspection within three (3) business days and provide a copy to the Government Contracting Officer.
- The Lessor shall correct all deficiencies noted prior to the Tenant Agency acceptance.

DS
P

DS
BTS

DS
MP

**TABLE H – ON-SITE INSPECTION
POINTS**

BUILDING LOCATION (Inspection Point)		Paragraph Reference	
Main Electrical Room (Electrical Service Entrance)		Building Shell	Pass/Fail N/A
Bonding Conductor from Intersystem Bonding Termination (IBT) to Master Ground Bus Bar (MGB)		7.020 Section 2 C.5	
Grounding Conductor from Building Steel to Intersystem Bonding Termination (IBT)		7.020 Section 2 C.4	
Grounding Conductor from Concrete Encased Electrode (Ufer) to Intersystem Bonding Termination (IBT)		7.020 Section 2 C.3 7.020 Section 2 C.4	
Type 1 or Type 2 Surge Protection Device (SPD)		7.020 Section 2 D	
BUILDING LOCATION (Inspection Point)		Paragraph Reference	
Main Telecommunications Equipment Room (Telephone Company Service Entrance)		Building Shell	Pass/Fail N/A
Grounding Conductor from Concrete Encased Electrode (Ufer) or Building Steel to Telecommunications Master Ground Bus Bar (TMGB)		7.020 Section 2 C.3 7.020 Section 2 C.7	
Sub-Telecommunications Equipment Room(s) (Where applicable)		Building Shell	Pass/Fail N/A
Grounding Conductor from Concrete Encased Electrode (Ufer) or Building Steel to Telecommunications Ground Bus Bar (TGB)		7.020 Section 2 C.3	
INSPECTOR NAME	SITE NAME	INSPECTOR SIGNATURE	INSPECTION DATE

7.32 WAREYARD PERIMETER SECURITY (SHELL)

- A. The wareyard shall be secured by an eight (8) foot fence topped by 3 strands of two-stranded barbed wire, cantilevered outward at a 45 degree angle. Should new fencing be required to meet this requirement, the cost of new fencing shall be considered as a part of the shell to be provided by lessor. Fence design to be approved by Government.
- B. Two (2) sixteen foot (16') wide, cantilever mounted gates which are fully automated with a time delay system which will allow gate closure after entry of vehicles. All mechanical and electrical mechanisms necessary for operating, opening and closing the gates will be located inside the wareyard. Regardless of the type of gate mechanisms used, ensure the wareyard remains secure at the opening. All chain guards and mechanical moving parts must be enclosed.
- One of these gates shall be equipped with an electronically controlled PACS hardware for ingress with the other gate being equipped with PACS hardware for egress from the wareyard area.
 - Gates will be labeled with "Entrance" and "Exit" signage provided by Lessor and installed on access gates.
 - Vehicle trip bars for egress will not be permitted.
 - One (1) underground one and one-half (1 1/2) inch conduit from the facility to the wareyard ingress PACS hardware location for installation of one (1) data cable which will be used for government installation of telephone for delivery access to wareyard. No push-button release from a remote location is allowed on PACS hardware.
- C. Two (2) three foot (3') wide personnel gates will be required, one will be equipped with PACS hardware and free exit hardware, and the other will be secure from operation from the exterior of the fence and equipped with free exit hardware (for emergency exit only). The gates and the fencing adjacent to the gates must be screened by the Lessor to prevent access to the PACS and free exit hardware. Lessor may provide an equivalent alternate security for the gate hardware for consideration by the Contracting Officer. Location of all gates will be determined by the Government at space layout.

DS
P

DS
BTS

DS
MP